CONTACT INFORMATION
Mining Records Curator
Arizona Geological Survey
1520 West Adams St.
Phoenix, AZ 85007
602-771-1601
http://www.azgs.az.gov
inquiries@azgs.az.gov

The following file is part of the

Arizona Department of Mines and Mineral Resources Mining Collection

ACCESS STATEMENT

These digitized collections are accessible for purposes of education and research. We have indicated what we know about copyright and rights of privacy, publicity, or trademark. Due to the nature of archival collections, we are not always able to identify this information. We are eager to hear from any rights owners, so that we may obtain accurate information. Upon request, we will remove material from public view while we address a rights issue.

CONSTRAINTS STATEMENT

The Arizona Geological Survey does not claim to control all rights for all materials in its collection. These rights include, but are not limited to: copyright, privacy rights, and cultural protection rights. The User hereby assumes all responsibility for obtaining any rights to use the material in excess of "fair use."

The Survey makes no intellectual property claims to the products created by individual authors in the manuscript collections, except when the author deeded those rights to the Survey or when those authors were employed by the State of Arizona and created intellectual products as a function of their official duties. The Survey does maintain property rights to the physical and digital representations of the works.

QUALITY STATEMENT

The Arizona Geological Survey is not responsible for the accuracy of the records, information, or opinions that may be contained in the files. The Survey collects, catalogs, and archives data on mineral properties regardless of its views of the veracity or accuracy of those data.

PRINTED: 08/07/2001

ARIZONA DEPARTMENT OF MINES AND MINERAL RESOURCES AZMILS DATA

PRIMARY NAME: GROOM

ALTERNATE NAMES:
AMAZON, PATENTED
SOUTH AMAZON, PATENTED
CONGO, PATENTED
GYPSY, PATENTED
IRON HILL, PATENTED
MILEVORE COPPER CO.

YAVAPAI COUNTY MILS NUMBER: 360B

LOCATION: TOWNSHIP 8 N RANGE 3 W SECTION 2 QUARTER E2
LATITUDE: N 34DEG 03MIN 52SEC LONGITUDE: W 112DEG 32MIN 24SEC
TOPO MAP NAME: MORGAN BUTTE - 7.5 MIN

CURRENT STATUS: PAST PRODUCER

COMMODITY:
GOLD
SILVER
COPPER OXIDE
IRON HEMATITE

BIBLIOGRAPHY:
ADMMR GROOM MINE COLVO FILE
BLM MINING DISTRICT SHEET 255
WILSON, E.D. ETAL. AZ LODE GOLD MINES AZBM
BULL 137 1934 P 64
ADMMR TEXAS CHIEF AND COPPER PRINCE FILE
REPORT TO THE GOVERNOR OF AZ 1899 P 86
ADMMR CARD FILE & GROOM MINE FILE
CLAIMS EXTEND INTO SEC. 2 & 12

GROOM MINE REFERENCES YAVAPAI COUNTY

T8N R3W Sec. 2

BLM Mining District Sheet 255

ABM Bul. 137, p. 64

Texas Chief and Copper Prince (file) WHY? No

Report to the Governor of Arizona 1899, p. 86

MILS Sheet sequence number 0040250898

GROOM MINE YAVAPAI COUNTY

CJH WR 5/22/80: Stephen Stillion, Wickenburg, works with Matt Laxton, P.O. Box 1632, Wickenburg, AZ on the Groom patent group, Yavapai County. Mr. Laxton is the representative for his mother who owns the claims.

2-5-81

Matt Laxton

2 year

Red Bluff

U. S. Bureau of mines

access Road # 91

on File No 463.1/91

1943

T 8N R 3W Sec 2

Prospect
Gold & Copper

Roger Beale owner (then & now)

~~Joseph Smith~~

Lorraine Burgin
Status Service officer
~~B~~ U S Bureau of mines
Building 20
Denver Federal Center
Denver Colo 80225

Ken Phillips

Lorraine Burgin, States Service Officer
U. S. Bureau of Mines
Building 20
Denver Federal Center
Denver Colo 80225

Dear Mrs Burgin

I have a lease on the Groom mine from Mr Beale, the present owner. We are attempting to obtain all data possible on the property, we understand that in 1943 the U S Bureau of Mines, Tucson Ariz, investigated the Groom property while making an access road study.

We believe the access road study was no 91 and the mine file study was no 413.1/91. The mine is located in Section 2, T 8N - R 3W. It is a gold and copper prospect. We would like to obtain a copy of the report for our study and files.

Thank you for your assistance

J. GILBERT, JR.
PRESIDENT

A. J. GILBERT, III

A. J. GILBERT CONSTRUCTION CO.

GENERAL CONTRACTING
432-2078
P.O. BOX 5288
BISBEE, ARIZONA 85603

RECEIVED
NOV 06 1980

November 4, 1980

Mr. Matt Laxton
Chairman, Board of Directors
Red Bluff Mine, Inc.
P.O. Box 33934
Phoenix, Arizona

Dear Mr. Laxton:

Mr. Schumacher from Phelps Dodge has referred your asssays to us and we would be interested in a trial shipment of say 2 cars of your ore (150 tons plus).

Please contact us if you are interested or if you would care to visit us at Bisbee, Arizona, so that we may discuss any details you might require.

Sincerely,

A. J. GILBERT CONST. CO.

A. J. Gilbert Jr.
President

AJG:mew

RECEIVED
NOV 10 1980

phelps dodge Corporation Douglas Reduction Works, P.O. Drawer E, Douglas, Arizona 85607 • (602) 364-2441

October 31, 1980

Mr. Matt Laxton
Chairman, Board of Directors
Red Bluff Mine, Inc.
P. O. Box 33934
Phoenix, Arizona

Dear Mr. Laxton:

We have assayed your sample and it has sufficient values to process. For further information, please contact Mr. A. J. Gilbert, who will handle this material at the following address:

Gilbert Construction Company
400 Arizona Street
Warren, Arizona 85603

Telephone: (602) 432-2078

Thank you for your inquiry.

Yours very truly,

A. R. A. Schumacher
Chief Smelter Metallurgist

ARAS:das

cc: Mr. W. L. Gage w/enclosure
Mr. A. J. Gilbert w/enclosure

WM. L. SPICER
PRESIDENT - MANAGING DIRECTOR

(602) 584-5505

Red Bluff Mine, Incorporated

MAILING ADDRESS:

Postal Drawer 1085 Carefree, Arizona 85377

STEPHEN W. STILLION
VICE PRESIDENT

(602) 584-5505

Red Bluff Mine, Incorporated

MAILING ADDRESS:

Postal Drawer 1085 Carefree, Arizona 85377

P 206 461 103

CERTIFIED MAIL
NO INSURANCE COVERAGE PROVIDED
NOT FOR INTERNATIONAL MAIL
(See Reverse)

SENT TO
Walter Scott, Jr.
STREET AND NO.
1000 Kiewit Plaza
P.O. STATE AND ZIP CODE
Omaha, Neb. 68131

POSTAGE
CERTIFIED FEE
SPECIAL DELIVERY
RESTRICTED DELIVERY
CONSULT POSTMASTER FOR FEES
OPTIONAL SERVICES
RETURN RECEIPT SERVICE
SHOW TO WHOM AND DATE DELIVERED
SHOW TO WHOM, DATE AND ADDRESS OF DELIVERY
SHOW TO WHOM AND DATE DELIVERED WITH RESTRICTED DELIVERY
SHOW TO WHOM, DATE AND ADDRESS OF DELIVERY WITH RESTRICTED DELIVERY
TOTAL POSTAGE AND FEES $
POSTMARK OR DATE
1983
PS Form 3800, Apr. 1976

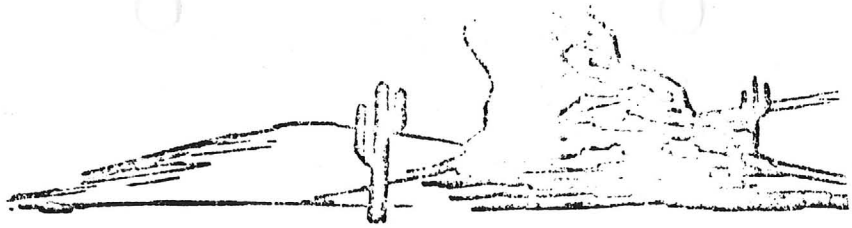

Red Bluff Mine, Incorpora

17835 Buntline Drive, Sun City West, Arizona
(602) 584-5505

July 25, 1983

Mr. Walter Scott, Jr., Chairman
The Board of Directors
Peter Kiewit Sons', Incorporated
One Thousand Kiewit Plaza
Omaha, Nebraska 68131

VIA CERTIFI

Dear Mr. Scott:

I found the excellent article about you and your company, p. 107, of the current, August 1, 1983, issue of FORBES Magazi interesting.

I am the President - Managing Director of the Red Bluff Mine, Incorporated, an Arizona corporation, which holds the title to a total of one hundred seventeen (117) mining claims in Sections 25, 26, 27, 30, 34 and 35, TOWNSHIP 9 NORTH, RANGES 2 and 3 WEST, Black Rock Mining District, Yavapai County, State of Arizona. Each mining claim has been recorded in Yavapai County and the Bureau of Land Management has individually identified each mining claim.

I am not privy to the long range program of Peter Kiewit Sons', Incorporated, other than the specific reference to possible "mining gold in the West", per the subject FORBES article. However, in the event you and your company may be considering the seeking of new sources of virgin properties that possess acceptable and more than adequate values of copper, gold and silver, I feel this letter may be of especial interest to you.

Our properties are of the type that lend towards, and will equitable support, an open pit operation. I am not aware of any area of the 2,000 (+) acres that will not present evidence, whatever the varied values, of gold, silver and copper wherever one might want to sample. Numerous assay reports reflect our ores, surface samplings, possess very acceptable and desired potential. Speaking specifically:

COPPER

2.15, 14.90, 24.25, 7.98, 5.65, 1.80, 0.45, 3.90,

19.0, 10.0, 2.40, 4.80, 21.1 percent per ton of ore.

SILVER

1.90, 0.25, 1.55, 1.00, 0.20, 6.90, 0.75, 3.83, 0.67,

0.44, 0.91, 0.74, 1.18, 1.16, 1.72, 1.90, 0.75, 0.70,

0.85, 1.90, 1.00, 2.20, 5.60, 4.79 ounces per ton of ore.

GOLD

0.241, 4.180, 0.756, 1.178, 1.004, 0.428, 0.37, 0.902, 5.93,

0.91, 0.735, 0.148, 2.48, 3.31. 0.905, 2.79, 8.31, 2.90, 0.60,

0.176, 0.210, 0.178, 0.338, 0.276, 0.18, 0.98, 0.59, 0.39, 0.45,

0.58, 0.54, 0.30, 0.29, 0.23, 0.93, 1.20, 0.13, 0.80, 1.0, 1.2,

1.1, 1.2, 1.4, 0.486, 0.840, 0.902, 1.894 ounces per ton of ore.

To confirm and verify the above values, and to be comfortable with my listing, I would like to invite you to direct some of your staff to schedule an indepth and comprehensive study of our properties to satisfy themselves. Professional geologists express the opinion the properties of the Red Bluff Mine, Incorporated, "lie in" and really "hold the key" to the entire area.

I enclose a topographical map indicating the properties of the Red Bluff Mine, Incorporated, outlined in red ink, and an enlargement of the map particularly and distinctly identifying the properties.

I am a retired Foreign Service Officer in the diplomatic service of our country. I am approaching my 65th birthday, and I feel I am "near the position" of moving at a "slightly" slower pace in my day to day activities! Accordingly, Mrs. Spicer and I would seriously consider any equitable proposal that might include one or more of the following --

1. Enter into a mutually satisfactory Lease Agreement for a short term of years with the provision that formal mining operations be underway within a designated time frame. The Lease Agreement could include the total 117 mining claims, or it could be directed to a portion of the properties.

2. Should the lessee prefer an Option to Purchase, Mrs. Spicer and I would hope to retain a minority position. An acquisition program might possibly include an exchange of specified shares of stock in the two separate corporations as part of the purchase price.

Mr. Scott, please do not view my communication as being presumptuous. To the contrary, I want to call to your personal attention our mining properties and to present how I prefer to begin arranging matters in the coming months. If you and the officials of Peter Kiewit Sons', Incorporated should express a genuine interest in our mining properties, I do not foresee any major obstacle in our negotiating a mutually satisfactory and equitable agreement.

I am taking the liberty of enclosing for your perusal, if you have not previously seen the issues, copies of recent editions of the Silver & Gold Report with especial attention directed to silver and gold in the future months and years with the continuing government deficits, inflation, military, social and economic problems throughout the world.

I will welcome your comments and suggestions.

Sincerely,

RED BLUFF MINE, INCORPORATED

Wm. L. Spicer
President - Managing Director

Enclosures -- as stated.

1435 SOUTH 10TH AVENUE
TUCSON, ARIZONA 85713

Jacobs Assay Office

Registered Assayers

Since 1880

PHONE 622-0813

RECEIVED
DEC 22 1980

Certificate No. 60779 *

TUCSON, ARIZONA 85702 Dec 12, 19 80

Sample Submitted by Mr Red Bluff Mining

SAMPLE MARKED	GOLD Ozs. per ton ore		~~GOLD Value per ton ore *~~		SILVER Ozs. per ton ore		~~COPPER Per cent Wet Assay~~		~~LEAD Per cent Wet Assay~~		~~Per cent Wet Assay~~		~~Per cent Wet Assay~~	
AHU #2	1.	178			1.	55								
Main Product	0.	756			0.	10								
12-9 Heads	4.	180			1.	25								
12-9 Tails	0.	241			0.	05								

* Gold Figured $300.00 per oz. Troy

Charges $ 56.00

+ Rush

Very respectfully,

Arizona Testing Laboratories

817 West Madison · Phoenix, Arizona 85007 · Telephone 254-7181

Red Bluff Mine, Inc.
Post Office Box 33934
Phoenix, Arizona 85067

Date October 10, 1980

ASSAY CERTIFICATE

LAB NO.	IDENTIFICATION	OZ. PER TON		PERCENTAGES		
		GOLD	SILVER	COPPER	IRON	
8134	1	2.9	1.9		30.	
	2	0.60	0.75		30.	

Respectfully submitted,

ARIZONA TESTING LABORATORIES

Claude E. McLean, Jr.

Since 1950

TUCSON, ARIZONA 85702

Rec'd DEC 22 1980

Certificate No. 6779

Date Dec. 12, 1980

Sample Submitted by Mr Red Bluff Mining

SAMPLE MARKED	GOLD Ozs. per ton ore		~~GOLD Value per ton ore *~~		SILVER Ozs. per ton ore		~~COPPER Per cent Wet Assay~~		~~LEAD Per cent Wet Assay~~		~~Per cent Wet Assay~~		~~Per cent Wet Assay~~	
AHW #2	1.	119			1.	25								
Main Product	0.	756			0.	10								
12-1 Heads	4.	180			1.	25								
12-9 Heads	0.	241			0.	05								

* Gold Figured $[illegible].00 per oz. Troy

Charges $ [illegible]

+ Pick [illegible]

MATT LAXTON
CHAIRMAN, BOARD OF DIRECTORS

(602) 279-9063

Red Bluff Mine, Incorporated

CORPORATE OFFICES:
Suite Number 301
3030 North Central Avenue
Phoenix, Arizona 85012

MAILING ADDRESS:
P.O. Box 33934
Phoenix, Arizona 85067

MINOR PRODUCTS MINOR <A.U. A.G.>
POTENTIAL PRODUCTS POTEN <>
OCCURRENCES OCCUR <>

MINOR COMMODITIES PRESENT C12 <>
OCCURRENCES OCCUR <>

PRODUCTION

PRODUCER

PRODUCTION YES (circle) PRODUCTION SIZE SML MED LGE (circle one)

NON-PRODUCER

PRODUCTION UND NO (circle one)

EXPLORATION OR DEVELOPMENT

STATUS

PRODUCER

STATUS AND ACTIVITY A20 <4>

NON-PRODUCER

STATUS AND ACTIVITY A20 <>

DISCOVERER L20 <>
YEAR OF DISCOVERY L10 <> NATURE OF DISCOVERY L30 <B> YEAR OF FIRST PRODUCTION L40 <1928> YEAR OF LAST PRODUCTION L45 <1958>
PRESENT/LAST OWNER A12 <>
PRESENT/LAST OPERATOR A13 <MILEDGE COPPER COMPANY>
EXPL./DEV COMMENTS L110 <MAIN PATENTED CLAIMS ARE AMAZON, SOUTH AMAZON, CONGO, AND GYPSY>

DESCRIPTION OF DEPOSIT

DEPOSIT TYPE(S) C40 <VEIN>
DEPOSIT FORM/SHAPE M10 <TABULAR>
DEPTH TO TOP M20 <> UNITS M21 <> MAXIMUM LENGTH M40 <9,000> UNITS M41 <FT>
DEPTH TO BOTTOM M30 <> UNITS M31 <> MAXIMUM WIDTH M50 <> UNITS M51 <>
DEPOSIT SIZE M15 <SMALL> M16 <MEDIUM> M16 <LARGE> (circle one) MAXIMUM THICKNESS M60 <6> UNITS M61 <FT>
STRIKE M70 <N 20W> DIP M80 <NEAR VERTICAL>
DIRECTION OF PLUNGE M100 <> PLUNGE M90 <>
DEP DESC. COMMENTS M110 <VEINS ASSOCIATED WITH PORPHYRY DIKES. 2 VEIN SYSTEMS 250 FT APART ON SURFACE. VEINS 6 FT THICK COMPRISE MINERALIZED ZONE 10 TO 40 FT WIDE>

DESCRIPTION OF WORKINGS

Workings are SURFACE M120 UNDERGROUND M130 BOTH M140 (circle one)
DEPTH BELOW SURFACE M160 <500> UNITS M161 <FT>
LENGTH OF WORKINGS M170 <> UNITS M171 <>
OVERALL LENGTH M190 <> UNITS M191 <>
OVERALL WIDTH M200 <> UNITS M201 <>
OVERALL AREA M210 <> UNITS M211 <>
DESC OF WORK. COM. M220 <SHAFT 500 FT DEEP>

GEOLOGY

AGE OF HOST ROCK(S) K1 <P.R.O.T., T.E.R.T., U. UNDATED BUT PROBABLY 1750 MILLION YEARS AND OLDER; UNDATED, PROBABLY PALEOCENE - MIOCENE>
HOST ROCK TYPE(S) K1A <GRANODIORITE, GRANITE, GRANITIC GNEISS, SCHIST; RHYOLITE ANDESITE>
AGE OF IGNEOUS ROCK(S) K2 <P.R.O.T., T.E.R.T., U. AS LINE K1>
IGNEOUS ROCK TYPE(S) K2A <GRANODIORITE, GRANITE; RHYOLITE, ANDESITE (?)>
AGE OF MINERALIZATION K3 <P.A.L.E.O.-M.I.O., U. UNDATED, PROBABLY MID-TERTIARY>
PERT. MINERALS (NOT ORE) K4 <QUARTZ, HEMATITE, LIMONITE>
ORE CONTROL/LOCUS K5 <FAULTING, SHEARING, IGNEOUS ACTIVITY - DIKES>
MAJ REG TRENDS/STRUCT N5 <FOLIATION IN PRECAMBRIAN SCHIST AND GNEISS TRENDS N25E TO N65E>
TECTONIC SETTING N15 <>
SIGNIFICANT LOCAL STRUCT. N70 <VEINS (AND GENETICALLY-RELATED (?)) DIKES TREND N10W TO N40W AND CROSSCUT PRECAMBRIAN FABRIC>
SIGNIFICANT ALTERATION N75 <MINOR TO NONE>
PROCESS OF CONC./ENRICH. N80 <OXIDATION AT NEAR SURFACE>
FORMATION AGE N30 <P.R.O.T., U. UNDATED, PROBABLY 1750 MILLION YEARS OR OLDER>
FORMATION NAME N30A <UNNAMED GNEISS, SCHIST>
SECOND FM AGE N35 <, U.>
SECOND FM NAME N35A <>
IGNEOUS UNIT AGE N50 <P.R.O.T., U. AS LINE N30>
IGNEOUS UNIT NAME N50A <UNNAMED GRANODIORITE, GRANITE>
SECOND IG UNIT AGE N55 <P.A.L.E.O.-M.I.O., U. UNDATED, PROBABLY MID-TERTIARY>
SECOND IG UNIT NAME N55A <UNNAMED RHYOLITE ANDESITE (?) DIKES>
GEOLOGY COMMENTS N85 <DEPOSIT IS HIGH-ANGLE CURVED VEIN WHICH IS ASSOCIATED WITH RHYOLITE OR ANDESITE DIKES OF PROBABLE MID-TERTIARY AGE THAT CUT PRECAMBRIAN IGNEOUS AND METAMORPHIC ROCKS>

GENERAL COMMENTS

GENERAL COMMENTS GEN <>

* GENERAL REFERENCES

REFERENCE 1 F1 < ABGMT FILE (CLIPPINGS FILES)

REFERENCE 2 F2 <

REFERENCE 3 F3 < AZ. DEPT. MIN. RESOURCES FILE DATA (TEXAS CHIEF FILE)

REFERENCE 4 F4 < ABM BULL 137, p. 64

Groom File

U.S. CRIB-SITE FORM

RECORD IDENTIFICATION

*RECORD NUMBER B10 <>

*RECORD TYPE B20 <X,1,M>

DEPOSIT NUMBER B40 <>

*REPORT DATE G1 <8,1,b,1,0> (YR. MO.)

*INFORMATION SOURCE B30 <1,2>

*FILE LINK IDENT. B50 < USBM 004 025 0898

*REPORTER(SUPERVISOR) G2 < Roth, Frances (last, first, middle initial) (DeWitt Ed (last, first, middle initial)

*REPORTER AFFILIATION G5 < ABGMT >

*SITE NAME A10 < Groom Mine

*SYNONYMS A11 < AMAZON

LOCATION

*MINING DISTRICT/AREA A30 < Black Rock District

*COUNTY A60 < Yavapai >

*STATE A50 <A,Z>

*COUNTRY A40 <U.S.

*PHYSIOGRAPHIC PROV A63 <1,2,b>

*DRAINAGE AREA A62 <1,5,0,7,0,1,0,3,b>

*LAND STATUS A64 <0,0,b,,b,(,,,,,)>

*QUADRANGLE NAME A90 < Morgan Butte (1,9,6,9,1)>

*QUADRANGLE SCALE A100 <2,4,0,0,0>

SECOND QUAD NAME A92 < (,,,,,)>

SECOND QUAD SCALE A91 <>

*ELEVATION A107 <4,0,0,0,b,F,T>

UTM

*NORTHING A120 <3,7,7,0,0,7,0>

*EASTING A130 <3,5,7,7,0,0>

*ZONE NUMBER A110 <+,1,2>

*ACCURACY

ACCURATE (ACC) (circle)

ESTIMATED EST <>

GEODETIC

*LATITUDE A70 <,,,-,,,-,,,N>

*LONGITUDE A80 <,,,-,,,-,,,W>

CADASTRAL

*TOWNSHIP(S) A77 <0,0,8,N,:,b,,,,,:,b,,,,,:,b,,,,,>

*RANGE(S) A78 <0,0,3,W,:,b,,,,,:,b,,,,,:,b,,,,,>

*SECTION(S) A79 < 02 :,b, :,b, :,b,

*SECTION FRACTION(S) A76 < SW OF SW OF NE

*MERIDIAN(S) A81 < Gila and Salt River >

*POSITION FROM NEAREST PROMINENT LOCALITY A82 < 1.13 miles NE of Morgan Butte

*LOCATION COMMENTS A83 < location taken to center of shaft which may be Groom; a second shaft is located approximately 100 meters due north. SHAFTS ON SOUTH AMAZON AND CONGO CLAIMS

* ESSENTIAL INFORMATION

+ ESSENTIAL SOMETIMES OR HIGHLY RECOMMENDED

Arizona Testing Laboratories

817 West Madison · Phoenix, Arizona 85007 · Telephone 254-6181

For ~~A. M. L. Mining~~
Post Office Box 1632
Wickenburg, Arizona 85358

Date July 28, 1980

ASSAY CERTIFICATE

LAB NO.	IDENTIFICATION	OZ. PER TON		PERCENTAGES			
		GOLD	SILVER	COPPER	IRON		
6994	High & Dry 101 ~~Tailings~~	0.93	0.15				
	Mill 102 Tailings	0.02	Trace				
	High & Dry 103 Ore	1.2	0.25				
	Mill Run Sizer/Table	0.31	0.25		17.%		
	Concentrates	0.80	0.70		50.%		
	2nd Pass						

Respectfully submitted,
ARIZONA TESTING LABORATORIES

Claude E. McLean, Jr.

Claude E. McLean, Jr.

Registered Assayer
CERTIFICATE NO. 6258
CLAUDE EUGENE McLEAN, JR.
Date Signed 7/28/80
ARIZONA, U.S.A.

AmeriChem Engineering Services

RECEIVED
NOV 20 1980

Red Bluff Mine Inc.
P.O. Box 33934
Phoenix, AZ

Date: 11/17/80

Atomic Absorption analysis of samples received 10/27/80

for Gold (Au) & Silver (Ag)

#	Sample ID	Date	Element	Ext.	PPM	Oz/Ton	Oz/Gal	%w/w
516	Ore Styrofoam	10/27	Au	7%NaCN 1%KCN		5.93		
"	"	"	Ag	"		3.83		
517	Ore Can	10/27	Au	"		0.91		
"	"	"	Ag	"		0.67		

Ext. = Extraction method: AR, Aqua Regia; CN Sodium Cyanide; N, Nitric Acid; O, Other

Due to the fact that no sample is truly representative of an ore body, and that these results represent evidence derived by specific laboratory methods of extraction, AmeriChem Engineering Services disclaims any liability for decisions made on the basis of this report. This report is specifically prepared for and distribution is limited to the party specified above.

4231 E. Raymond Street Phoenix, Arizona 85040 Phone (602) 268-3431 (Telex 165075)

IRON KING ASSAY OFFICE

ASSAY CERTIFICATE

BOX 247 — PHONE 632-7410
HUMBOLDT, ARIZONA 86329

REGISTERED ASSAYER CERTIFICATE No. 2978 WALTER G. STATLER Date Signed 10/3/80 ARIZONA, U.S.A.

ASSAY MADE FOR: Matt Laxton
Wickenburg, Ariz.

Oct 3, 1980

REF. NO.	DESCRIPTION	oz/ton Au	oz/ton Ag		% Fe	% Pb	% Zn	% Cu
10-2-5	#1	.176	0.12					.18
10-2-6	#2	.210	0.13					.90
10-2-7	#3	.178	0.12					.25

CHARGES $38.25
paid 27.75 Bal. $10.50 - PAID

ASSAYER

Walter G. Statler

35 SOUTH 10TH AVENUE
TUCSON, ARIZONA 85713

RECEIVED
OCT 7 1980

Jacobs Assay Office

Registered Assayers

Since 1880

PHONE 622-0813

Sample Submitted by Mr. Red Bluff Mine

Tucson, Arizona, 1 Oct., 1980

Sample Marked	GOLD Ozs. per ton ore	GOLD Value per ton ore	SILVER Ozs. per ton ore	COPPER Per cent Wet Assay	LEAD Per cent Wet Assay	Per Cent Wet Assay	Per Cent Wet Assay	Per Cent Wet Assay
"MAIN ORE Pile"	0.338	—	0.05					
LIGHT-DARK CENTER BACK	0.276	—	<0.05					

* Gold Figured ~~$300.00 per oz.~~ Troy

< = Less Than

Charges $ 20.00 Pain

Very respectfully,

Nicholas A. Jacobs

IRON KING ASSAY OFFICE

ASSAY CERTIFICATE

BOX 14 — PHONE 632-7410
HUMBOLDT, ARIZONA 85329

REGISTERED ASSAYER
CERTIFICATE No. 2978
WALTER G. STALLER
Date Signed 2-24-80
ARIZONA, U.S.A.

ASSAY MADE FOR: MATT LAXTON

Feb. 24, 1980

REF. NO.	DESCRIPTION	oz/ton Au	oz/ton Ag		% Fe	% Pb	% Zn	% Cu
7-2-6	#1		464.74					
7-2-7	#2		5.60					
0-8-13	#re sample	.486	4.79			Nil		21.1
9-18-25	Christmas ore	.840	0.14					
9-18-26	" " #2	.902	0.22					
9-18-27	Back Ledge	1.894	79.15					2.55

CHARGES: _____

ASSAYER _____

Arizona Testing Laboratories

817 West Madison · Phoenix, Arizona 85007 · Telephone 254-6181

For now Red Bluff mining Co ~~A. M. L. Mining~~
Post Office Box 1632
Wickenburg, AZ. 85358

RED BLUFF MINE

Date September 12, 1980

ASSAY CERTIFICATE

LAB NO.	IDENTIFICATION	OZ. PER TON		PERCENTAGES			
		GOLD	SILVER	COPPER			
7711	1-5 Truckloads	0.58	1.2	10. %			

Respectfully submitted,

ARIZONA TESTING LABORATORIES

Claude E. McLean

Claude E. McLean, Jr.

Registered Assayer
CERTIFICATE NO. 6258
CLAUDE EUGENE McLEAN, JR.
Date Signed 9/12/80
ARIZONA, U.S.A.

Arizona Testing Laboratories

817 West Madison · Phoenix, Arizona 85007 · Telephone 254-6181

For Red Bluff Mine Inc.
Laxton/Spicer
Box 33934
Phoenix, AZ. 85067

Date September 12, 1980

ASSAY CERTIFICATE

LAB NO.	IDENTIFICATION	OZ. PER TON		PERCENTAGES			
		GOLD	SILVER	COPPER			
7712	Truck #1	0.45	2.4	19. %			

Respectfully submitted,

ARIZONA TESTING LABORATORIES

Claude E. McLean, Jr.

Claude E. McLean, Jr.

Registered Assayer
CERTIFICATE NO. 6258
CLAUDE EUGENE McLEAN, JR.
Date Signed 9/12/80
ARIZONA, U.S.A.

Arizona Testing Laboratories

817 West Madison · Phoenix, Arizona 85007 · Telephone 254-6181

For ~~A. M. I.~~ Date August 14, 1980

Post Office Box 1632
Wickenburg, Arizona 85358
ATTN: Mr. M. Laxton

ASSAY CERTIFICATE

LAB NO.	IDENTIFICATION	OZ. PER TON		PERCENTAGES			
		GOLD	SILVER	COPPER			
7254	Shot 2 LP	0.54	0.45				
	Shot 2 UHL	0.03	0.10				
	High & Dry 301 UHL	0.29	0.25				
	High & Dry 302 UHHN	0.01	0.05				
	UHL 303	0.23	0.10				

Respectfully submitted,

ARIZONA TESTING LABORATORIES

Claude E. McLean Jr.

Claude E. McLean, Jr.

Registered Assayer
CERTIFICATE NO. 6258
CLAUDE EUGENE McLEAN, JR.
Signed 8/14/80
ARIZONA, U.S.A.

Arizona Testing Laboratories

817 West Madison · Phoenix, Arizona 85007 · Telephone 254-1181

For Red Bluff Mine, Inc.
Post Office Box 33934
Phoenix, Arizona 85067

Date October 10, 1980

ASSAY CERTIFICATE

LAB NO.	IDENTIFICATION	OZ. PER TON		PERCENTAGES		
		GOLD	SILVER	COPPER	IRON	
8134	1	2.9	1.9		30.	
	2	0.60	0.75		30.	

Respectfully submitted,

ARIZONA TESTING LABORATORIES

Claude E. McLean, Jr.

Arizona Testing Laboratories

817 West Madison · Phoenix, Arizona 85007 · Telephone 254-6181

For A. M. L. Mining
Post Office Box 1632
Wickenburg, Arizona 85358

Date July 11, 1980

ASSAY CERTIFICATE

LAB NO.	IDENTIFICATION	OZ. PER TON		PERCENTAGES			
		GOLD	SILVER	COPPER			
6780	UH001	1.0	0.85	2.4			
	UH002	1.2	1.9				
	HWUH003	0.06	0.10	1.2			
	UH004	1.1	1.9				
	UH005	1.2	1.0				
	UH006	1.4	2.2	4.8			

Respectfully submitted,

ARIZONA TESTING LABORATORIES

Claude E. McLean, Jr.

Registered Assayer
CERTIFICATE NO. 1258
CLAUDE EUGENE McLEAN, JR.
Date Signed 7/11/80
ARIZONA, U.S.A.

NOV 07 1980

DOUGLAS REDUCTION WORKS

ASSAY AND ANALYSIS CERTIFICATE

DOUGLAS, ARIZONA 19

NAME .....

Seller Lot	Shipper's Lot	Copper %	OZS. PER TON Silver	OZS. PER TON Gold	SiO_2 %	Al_2O_3 %	Fe %	CaO %	MgO %	Mn %	Zn %	P %	S %	Cl %	%
		5.0	0.91	0.905	19.7	7.6	38.1	03	1.5	01	tr	Tr	0.1	3.1	00

Chief Chemist

Arizona Testing Laboratories

817 West Madison · Phoenix, Arizona 85007 · Telephone 254-6181

For Mr. Matt Laxton
Post Office Box 1632
Wickenburg, AZ. 85358

Date May 15, 1980

ASSAY CERTIFICATE

LAB NO.	IDENTIFICATION	OZ. PER TON		PERCENTAGES			
		GOLD	SILVER	COPPER			
5938	Mine Ore 1 Ledge	0.11	trace				
	#2 Main Ore Ledge	0.02	trace				
	Hilltop #1	0.30	0.05				
	Hilltop South Side Down Hill	0.09	0.10				
	Old Tunnel 20' left	0.02	0.05				
	Small ledge in wash	0.02	trace				
	UH 5-10-80	0.77	1.3				

Respectfully submitted,

ARIZONA TESTING LABORATORIES

Claude E. McLean, Jr.

Claude E. McLean, Jr.

Registered Assayer
CERTIFICATE No.
6258
CLAUDE EUGENE McLEAN, JR.
Date Signed 5/15/80
ARIZONA, U.S.A.

IRON KING ASSAY OFFICE

ASSAY CERTIFICATE

BOX 247 — PHONE 632-7410
HUMBOLDT, ARIZONA 86329

REGISTERED ASSAYER CERTIFICATE NO. 2978 WALTER G. STATLER Date Signed 5/12/80 ARIZONA, U.S.A.

ASSAY MADE FOR
MATT LAXTON
P.O. Box 1632
Wickenburg, Ariz. 85358

May 12, 1980

SAMPLE DESCRIPTION	Ref no.	Gold oz/ton	Silver oz/ton		Copper %	
AML - 1	03-4-1	.130	Tr		0.30	
" -2	-2	.020	Nil		0.58	
" -3	-3	.160	0.98		4.68	[illegible]
" -4	-4	.212	0.07		2.78	[illegible]
" -5	-5	.246	0.13		0.48	[illegible]
TB-1	-6	.064	Nil			[illegible]
TB-2	-7	.020	1.52			
TB -3	-8	.134	Tr			
P-1	-9	.328	1.03			
P-2	-10	.054	1.65			
P-3 (Light rock)	-11	Tr	Nil			[illegible]
P-3 (Dark rock)	-12	.376	Nil			[illegible]
YB-1-S	-13	.094	0.19			
YB-N-Dump	-14	.040	0.22			
YB-Central	-15	.054	Nil			
YB-N	-16	.400	0.06			
YB-Dump-3	-17	.150	0.59			
MB-Dump-1	-18	.256	Nil			
TB-4	-18A	1.360	3.64			
YB-Dump-4	-19	.350	0.21			
YB-Dump-2	-20	.280	0.02			
MV-Dump	-21	.388	2.41		2.30	

Copy of work assayed March 1980.

CHARGES 18.00 Pd

ASSAYER

NEVADA TESTING LABORATORIES, LTD.

300 WEST BOSTON AVENUE
LAS VEGAS, NEVADA 89102
TELEPHONE 641-7481

TESTING
INSPECTING
RESEARCH
DEVELOPMENT

MEMBER OF
AMERICAN SOCIETY FOR
TESTING MATERIALS

LABORATORY NO. A-800

DATE July 17, 1979

SAMPLE Ore

MARKED

DATE RECEIVED: July 16, 1979

SUBMITTED BY: MR. MATT LAXTON
3604 Tory Court
Las Vegas, Nevada 89110

REPORT OF DETERMINATION

	Gold, Percent by Weight	Gold, oz./ton
Metal Pieces	68.9	
Ore without metal pieces		2
Ore with metal pieces		19.5

Respectfully submitted,

NEVADA TESTING LABORATORIES, LTD.

By: Dan R. Berkabile, Chemist

DRB:jkd

NEVADA TESTING LABORATORIES
300 WEST BOSTON AVENUE
LAS VEGAS NEVADA 89101
TELEPHONE 641-7481

TESTING
INVESTIGATING
RESEARCH
DEVELOPMENT

MEMBER OF
AMERICAN SOCIETY FOR
TESTING MATERIALS

LABORATORY NO. A-800 DATE July 17, 1979

SAMPLE Ore

MARKS

DATE RECEIVED: July 16, 1979

SUBMITTED BY: MR. MATT LAYTON
3604 Tory Court
Las Vegas, Nevada 89110

REPORT OF DETERMINATION

	Gold, Percent by Weight	Gold, oz./ton
Metal Pieces	68.9	
Ore without metal pieces		2
Ore with metal pieces		19.5

Respectfully submitted,

NEVADA TESTING LABORATORIES, LTD.

By: Dan R. Bernabile
Dan R. Bernabile, Chemist

DRB:jkd

DOOK C

BOOK 3894

G1200M

FIELD N 180

OF THE RETRACEMEN

Patented Mining Claims in

T. 7 N., R.3 W., T. 8 N., R.2 W.,

T. 8 N., R.3 W., & T. 9 N., R.3 W.

and Two unpatented Mining Claims in T.8 N., R.3 W.

AND OF THE SURVEY OF

South Boundary

West Boundary

and

Subdivision Lines of

Township 8 North, Range 3 West

Of the Gila and Salt River Base and *Meridian,*

In the State of Arizona

EXECUTED BY

Benjamin J. Kinsey, U.S. Surveyor

3894

In the capacity of U. S. Surveyor, under Special Instructions dated October 3, 1928, *issued by the District Cadastral Engineer to govern surveys included in Group No.* 155, Arizona, *which were approved by the Commissioner of the General Land Office,* November 16, 1928, *and Assignment Instructions dated* February 15, 1930

Retracement & Survey commenced March 4, 1930

Retracement & Survey completed May 6, 1930

Book "C" · Group 155 · Arizona

1A

T. 8 N. - R. 3 W.
· INDEX · DIAGRAM ·

BOOK 3894

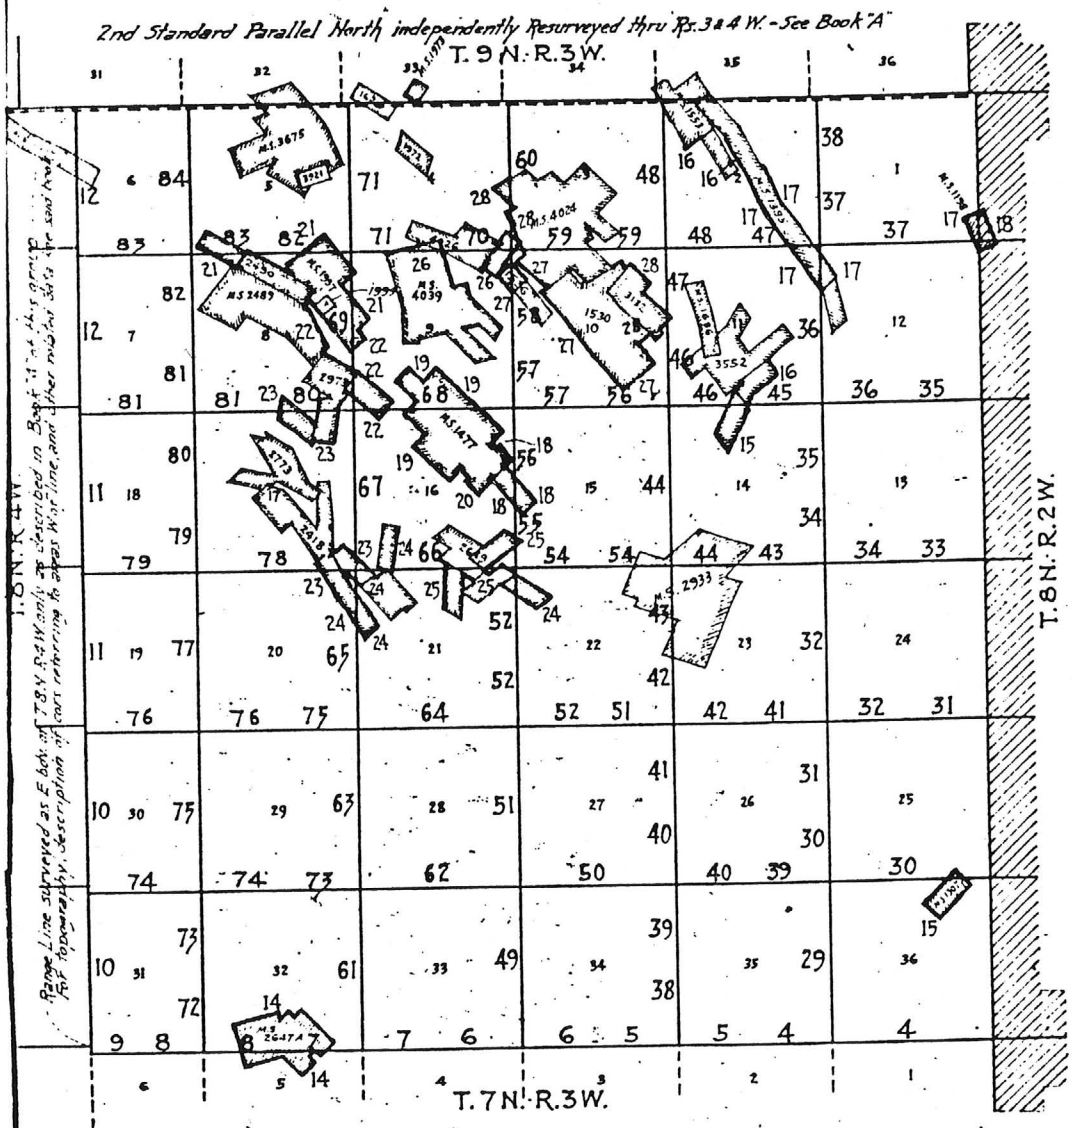

Lines surveyed under this group. (Notes herein indexed in black figures.)

Lines resurveyed under this group.

Lines retraced under this group. (Notes herein indexed in green figures.)

Lines of previously accepted surveys. Notes on file.

Unsurveyed township bdrs. and section lines.

Areas surveyed as per accepted plats on file.

RETRACEMENT OF A PORTION OF THE LINES OF SURVEYED MINERAL CLAIMS IN T.9 N., R.3 W.

chains	
9.09	To a point from which cor. No. 2, Texas Chief lode, bears S.12°00'E. 1.52 chs. dist.; a granite boulder, 4 x 2½ x 1½ ft., mkd. 2 1384 TC on the top (no exact point defined, measurement taken to center of lettering).
	Thence from Cor. No. 2
	S.11°43'E.
15.38	Intersect line bet. secs. 27 and 34, S.89°57'W. 16.98 chs. dist. from the cor. of secs. 26, 27, 34 and 35.
20.56	Intersect cor. No. 1 and place of beginning.

	Survey No. 1553. Bellairs Lode. Patented.
	Cor. No. 6, Bellairs lode, is a granite stone 12 x 12 x 8 ins above ground, firmly set, mkd. with cross (X) on top. B No 6 1553 on the N. face.
	Thence
	N.25°57'W.
5.36	Intersect line bet. secs. 2 and 3, T.8 N., R.3 W., S.0°01' E. 1.87 chs. dist. from the closing cor. of secs. 2 and 3.
7.44½	Intersect first stan. par. north, East 1.795 chs. dist. from the standard cor. of secs. 34 and 35, T.9 N., R.3 W.
11.56	Intersect line bet. secs. 34 and 35, T.9 N., R.3 W. N.0°01' W. 3.70 chs. dist. from the standard cor. of secs. 34 and 35. on S. bdy. of Tp.
13.22	Intersect cor. No. 5, Bellairs lode; a quartz stone 14 x 10 x 6 ins. above ground, firmly set, mkd. B No 5 1553 on E. face.
	Thence
	N.60°00'E.
0.84	Intersect line bet. secs. 34 and 35, N.0°01'W. 5.61½ chs. dist. from the standard cor. of secs. 34 and 35.
4.93	Intersect line 1-2. Survey No. 1531, Curley lode, N.50°37'W. 3.99 chs. dist. from point for cor. No. 1.
5.36	Intersect cor. No. 4. Bellairs lode; a granite stone 10x 8 x 6 ins. above ground, mkd. B No 4 1553 on S. face.

	Survey No. 1531. Curley Lode. Patented.
	Cor. No. 1 of Curley lode being lost, the point therefor is recovered from the record bearing objects:
	A granite rock in place, 3 x 3 x 1 ft. above ground, mkd. B X R on top, C No 1 1531 on NW. face, bears S.9°W. 20 lks. dist.
	A granite rock in place, 2 x 1½ x 1 ft. above ground, mkd. B X R on top, C No 1 1531 on NW. face, bears S.66½°W. 39 lks. dist.
	Thence

chains	
30.60	Spur, slopes E.; desc. along NE. slope 110 ft.
33.50	Head of gully, course E.
35.50	Spur, extends NE.; change of slope to W. and NW.
40.00	Set an iron post,3 ft. long, 1 in. diam.,30 ins. in the ground, for ¼ sec. cor., with brass cap mkd. ¼ S 34 | S 35 1932 raise a mound of stone 3 ft.base, 2 ft. high, W. of cor. Desc. 125 ft. over NW. slope.
46.25	Draw, course N.30°E.; along E. slope.
48.60	Point of rocky spur, slopes E.; desc. N. slope 100 ft.
50.85	Draw, course E.; asc. S. slope 100 ft.
53.40	Spur, slopes N.80°E.; desc. 85 ft. over N. slope.
56.80	Draw, course N.50°E.; along SE. slope, asc. 20 ft.
60.25	Spur, slopes N.50°E.; desc. 100 ft. over NE. slope.
64.00	Drain, course NE.; along E. slope.
68.00	Spur, slopes N.30°E.; desc. 70 ft. over NW. slope.
74.00	Small draw, course N.20°E.; change of slope to NE, desc. 110 ft.
79.85	Drain, course E.
80.00	Set an iron post,3 ft. long, 2 ins. diam.,20 ins. in the ground, to bedrock, with marked (X) stone deposited alongside, and in a mound of stone to top, for the cor. of secs. 26,27,34 and 35, with brass cap mkd. T9N R3W S 27 | S 26 S 34 | S 35 1932 Land, rolling mountains. Soil, rocky, 3rd. rate. No timber; undergrowth, scrub oak, mahogany, catclaw, cacti and greasewood.
	East on a random line bet.secs. 26 and 35.
40.00	Set temp. ¼ sec. cor.
80.10	Intersect the cor. of secs. 25,26,35 and 36.
	Thence West on true line bet.secs. 26 and 35. Over mountainous land, through scattered undergrowth.

SUBDIVISION OF T.9 N., R.3 W.

chains		
	T10N R3W S 36 S 2 | S 1 T9N R3W WO CC 1932	
80.23	Intersect N. bdy. of Tp.; true point for closing cor. of secs. 1 and 2.	
	From point of intersection the witness cor. established 16 lks. E. of true point for cor of secs. 35 and 36, T.10N., R.3 W., bears W. 7.42 chs. dist.; an iron post, 2 ins. diam., 12 ins. above ground, mkd. and witnessed as described in the official record.	
	Land, broken mountainous. Soil, rocky, 3rd. and 4th. rate. No timber; undergrowth, scrub oak, catclaw, cacti, mesquite and greasewood.	4
	---	4
	From the standard cor. of secs. 34 and 35, on S. bdy. of Tp., which is an iron post, 2 ins. diam., 14 ins. above ground, mkd. and witnessed as described in the official record.	5
	N.0°01'W. bet. secs. 34 and 35.	56
	Over rolling mountainous land, through scattered undergrowth.	60 64
	Desc. NE. slope 80 ft.	68
2.00	End of old road. from Constellation, bears S.20°E.	74.
3.70	Intersect line 5-6, Survey No.1553, Bellairs lode, S.25°52'E., 1.66 chs. dist. from cor. No.5. Enter patented land.	79.
4.60	Draw, 30 lks. wide, from SE., course NE.; asc. SE. slope 95 ft.	80.
5.615	Intersect line 4-5, Survey No.1553 Bellairs lode, N.60°00'E. 0.84 chs. dist., from cor. No.5. Leave patented land.	
9.25	Spur, slopes E.; desc. N. slope 70 ft.	
10.95	Intersect line 1-2, Survey No.1531, Curley lode, S.51°50½'E. 1.87 chs. dist. from cor. No.2. Enter patented land.	
11.80	Draw, course N.50°E.; asc. 25 ft.	
15.00	Spur, slopes N.75°E.; desc. NE. slope 75 ft.	
17.65	Draw, course E.; asc. 65 ft. over S. slope.	
19.50	Spur, slopes E.; desc. 85 ft. over NE. slope.	
20.525	Intersect line 4-5, Survey No.1531, Curley lode, N.43°55'W. 2.04 chs. dist., from cor. No.5. Leave patented land.	40.00
23.345	Intersect line 1-2, Survey No. 1531, Keystone lode, S.19°08'E. 0.165 chs. dist. from cor. No.2. Enter patented land.	80.10
23.40	Draw, course S.80°E.; asc. 175 ft. over S. slope.	
23.84	Intersect line 2-3, Survey No.1531, Keystone lode, N.60°00'E. 0.165 chs. dist. from cor. No.2. Leave patented land.	

GROOM

Book "C"

377

(1)

BOOK 3977

FIELD NOTES

OF THE

Retracement of part of the South Boundaries of T. 10 N., Rs. 3 and 4 W., the survey of subdivisional lines of T. 9 N., R. 3 W., and retracement of mining claim boundaries in said township of the

Of the Gila and Salt River Base and *Meridian,*

In the State of ARIZONA

EXECUTED BY

Dupree R. Averill

In the capacity of U. S. Surveyor, *under Special Instructions dated* October 6, *19* 32, *issued by the District Cadastral Engineer to govern surveys included in Group No.* 171, *which were approved by the Commissioner of the General Land Office,* Dec. 1, *19* 31, *and Assignment Instructions dated* Nov. 18, *19*31

Survey commenced January 4, *19* 32

Survey completed February 10, *19* 32.

6—151

Resurvey of

Second Standard Parallel North, thru Ranges 3 and 4 West.

Chains	
	(Thru Range 3 West.)
	No bearing trees available; raise a md. of stone 4 ft. base and 2 ft. high W. of cor. (No trace of the original std. cor. secs. 34 and 35 found in this vicinity.)
	Land, mountainous.
	Soil, rocky 4th. rate.
	Timber, scrub mesquite, ironwood and palo verde.
	Undergrowth, cacti, greasewood and catclaw.
	West, on true line, bnd. S. bdy. sec. 34.
	Over mountainous land, thru scattering timber and thick undergrowth.
	Asc. 321 ft. over E. slope.
13.40	Spur, brs. N., about 1 ch. wide.
	Desc. 388 ft. over SW slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for the reestablished std. ¼ sec. cor. sec. 34, with brass cap mkd. S C / ¼ S 34 / 1929
	No bearing trees available; raise a md. of stone 4 ft. base, 1½ ft. high N. of cor. No trace of the original std. ¼ sec. cor. sec. 34, T.9 N., R. 3 W. found in this vicinity.
	Desc. 96 ft. over W. slope.
42.60	O'Brien Gulch, rocky bottom, 30 lks. wide, course N.
	Asc. 218 ft. over E. slope.
59.00	Ridge, 1 ch. wide, brs. S. and NW.
	Desc. 125 ft. over SW slope.
63.25	Head of wash, course NW.
	Asc. 86 ft. over NE slope.
70.50	Spur, brs. NW.
	Desc. 227 ft. over SW slope.
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone around post, for the reestablished std. cor. secs. 33 and 34, with brass cap mkd. S C / T9N R3W / S33 S34 / 1929
	No bearing trees available; No trace of the original std. cor. secs. 33 and 34, T.9 N., R.3 W., found in this vicinity.
	Land, mountainous.
	Soil, rocky 4th. rate.
	Timber, mesquite, ironwood and palo verde.
	Undergrowth, greasewood, catclaw and cacti.
	West, on true line, on S. bdy. sec. 33.
	Over mountainous land, thru scattering timber and thick undergrowth.
	Desc. 34 ft. over SW slope.
1.60	Wash, 15 lks. wide, course NW.
	Desc. 95 ft. along S. side of same wash.

Resurvey of

Second Standard Parallel North, thru Ranges 3 and 4 West.

(Thru Range 3 continued.)

Land, mountainous.
Soil, rocky 4th. rate.
Timber, mesquite and palo verde, some ironwood.
Undergrowth, catclaw, greasewood and cacti.

West, on true line, on S. bdy. of sec. 35.
Over mountainous land, thru thinly scattered timber and thick undergrowth.
Desc. 22 ft. over steep W. slope.
1.80 Rocky wash, 30 lks. wide, 1 ft. deep, course N. (branch of Hawk Springs Wash.)
Asc. 571 ft. over NE slope.
21.90 Top of round butte, about 2 chs. in diam., on spur from SW.
Desc. 161 ft. over SW slope.
27.90 Head of wash, course SW.
Asc. gradually along S. slope.
30.90 Rocky, narrow spur, brs. S.
Desc. 168 ft. over SW slope to
40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit a stone mkd. with a cross (X) at base of post, raise a md. of stone about post for the reestablished std. ¼ sec. cor. of sec. 35, with brass cap mkd.

S C
¼ S 35

1929

No bearing trees available.
No trace of original std. ¼ sec. cor. sec. 35, T.9 N., R.3 W., found in this vicinity.

Desc. 220 ft. over SW slope.
49.00 Rocky wash, 20 lks. wide, course NW.
Asc. 40 ft. over NE slope to spur.
50.20 Intersect the NE side line (1-4) of the "Amazon" patented lode mining claim, Mineral Survey No. 1385, at a point 3.54 chs. S. 44°43'E., from cor. No. 3 thereof.
Thence across patented mineral land.
52.20 Spur, brs. N.
Desc. 46 ft. over W. slope.
54.00 Wash, 10 lks. wide, course N.
Asc. 25 ft. over E. slope.
54.80 Short spur, brs. N.
Desc. 25 ft. over E. slope.
55.70 Wash, 20 lks. wide, course N.
Asc. 156 ft. over NE slope.
63.90 Spur, brs. N.
Thence along level N. slope.
68.80 Desc. 167 ft. over rough NW slope to wash.
78.25 Intersect the SW side line (3-6) of the "Bellairs" patented lode mining claim, Mineral Survey No. 1553, at 7.50 chs. N.26°W., from cor. No. 6 thereof. Leave patented mineral land.
77.90 Rocky wash, 30 lks. wide, course N. (drains into Amazon Gulch).
Asc. 71 ft. over E. slope to cor.
79.20 Old road, brs. NE-SW.
80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for the reestablished std. cor. secs. 34 and 35, with brass cap mkd.

S C
T9N | R3W
S34 | S35

1929

Book "A" 3 '92 ORIGINAL

GROOM

ECCK 3892

FIELD NOTES

OF RETRACEMENT OF

Part of the Lines of Mineral Surveys Nos. 2388 and 2719

OF THE RESURVEY OF

2nd Standard Parallel North thru Ranges 3 and 4 West

Part (West ½) of South Boundary of T. 8 N., R. 4 W.

Part (North 2 M.) of East Boundary of T. 8 N., R. 5 W.

and

Part of the Subdivision Lines of T. 8 N., R. 4 W.

AND OF THE SURVEY OF

East Boundary

Part (East ½) of South Boundary

and Part (Completion) of the Subdivision Lines of

Township 8 North, Range 4 West

Of the Gila and Salt River Base and *Meridian,*

In the State of Arizona

EXECUTED BY

Benjamin J. Kinsey

U.S. Surveyor

In the capacity of U. S. Surveyor, under Special Instructions dated October 3, *1928, issued by the District Cadastral Engineer to govern surveys included in Group No.* 155 Arizona, *which were approved by the Commissioner of the General Land Office,* November 16, *1928, and Assignment Instructions dated* January 5, *1929*

Retracement
Resurvey and *Survey commenced* January 15, *1929.*

Retracement
Resurvey and *Survey completed* March 27, *1929.*

Survey of the Subdivision Lines of T.8 N., R.3 W.

Chains	
59.40	Spur, brs. NW. Desc. 25 ft. over NW slope.
65.90	Wash, 10 lks. wide, course N. Asc. 76 ft. over W. slo
70.10	Spur, brs. NW. Road on same, brs. NW-SE.
71.80	Desc. 27 ft. over W. slope.
73.00	Wash, 10 lks. wide, course N. Asc. 90 ft. over W. slo
79.86	The cor. of secs. 2, 3, 10 and 11.
	Land, mountainous.
	Soil, rocky 4th. rate.
	Timber, paloverde and mesquite.
	Undergrowth, cacti, catclaw and oakbrush.

	N.0°01'W., on true line, bet. secs. 2 and 3.
	Over mountainous land, thru scattering timber & undergrowth.
	Desc. 48 ft. over N. slope to wash.
3.45	Road, from Groom Mine to Wickenburg, Ariz., brs. NE-SW.
4.65	Wash, 10 lks. wide, course NE.
	Asc. 69 ft. over SE slope.
9.60	Telephone line, brs. E-W.
9.85	Rocky spur, brs. NE. Desc. 153 ft. over NW slope.
19.15	Wash, 10 lks. wide, course E. Asc. 92 ft. over S. slop
25.70	Ridge, brs. NE-SW. Desc. 92 ft. over NW slope.
31.75	Head of wash, course NW. Asc. 16 ft. over SW slope.
34.10	Spur, brs. NW. Desc. 119 ft. over NW slope.
39.45	Wash, 10 lks. wide, course NW. Asc. gradual SW slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a horseshoe at base of post, raise a mound of stone about post, for the ¼ sec. cor. of secs. 2 and 3, with brass cap marked
	S3 | S2 1930
	No trees available.
	Asc. 8 ft. over SW slope.
41.00	Spur, brs. NW. Desc. 91 ft. over N. slope.
46.50	Wash, 10 lks. wide, course W. Asc. 111 ft. over SW slope
55.70	Spur, brs. NW. Desc. 168 ft. over NE slope.
64.50	Wash, 10 lks. wide, course W. Asc. 47 ft. over S. slope.
67.20	Spur, brs. W. Desc. 140 ft. over N. slope.
67.60	Old road, brs. NE-SW.
72.69	Intersect the SW side line of the Bellairs Mat. Lode Mining claim, Mill Site Survey No. 1553, at 70 chs. of the N.26°W. of Corr. No. 6 thereof, across patented "Imperial" Mineral group.
73.29	Wash, 20 lks. wide, course W. Asc. 50 ft. over SW slope.
74.63	Intersect the land in the Parr Mill Site Survey No. 2370 at 2.70 chs. E. of a stone marked "Cor. 1" of secs. 34 and 35, described in Report of this group, but post, for the closing
	At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the closing cor. of secs. 2 and 3, with brass cap marked
	T9N R3W S 35 S3 | S2 T8N CC R3W 1930
	No bearing trees available.

Chains	
49.40	Spur, brs. NE. Desc. 58 ft. over NW slope.
72.95	Wash, 10 lks. wide, course NE. Asc. 58 ft. over SE slope.
74.60	Spur, brs. E. Desc. 72 ft. over NW slope.
77.50	Wash, 5 lks. wide, course E. Asc. 18 ft. over S. slope.
[illegible]	Old road, brs. E-W.
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post, for the cor. of secs. 2, 3, 10 and 11, with brass cap marked

T8N | R3W
S3 | S2
S10 | S11

1930

from which,
a 4 in. cross chiseled on the SE face of outcropping ledge, brs. N.63°45'W., 55 lks. dist. Alongside cross chisel BO S3
Conical peak, in Bradshaw Mts., brs. N.77½°E., about 25 miles dist.
Mound of stone on Swallow Mtn., brs. N.72°12'E.,
Morgan Butte, brs. S.64°W.
No bearing trees available.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, piloverde and mesquite.
Undergrowth, cacti, catclaw and oakbrush.

S.89°48'E., on a random line, bet. secs. 2 and 11.
40.00 Set temp. ¼ sec. cor.
75.86 Fall 25 lks. S. of the cor. of secs. 1, 2, 11 and 12.
Thence, N.89°58'W., on true line, bet. secs. 2 and 11.
Over mountainous land, thru scattering timber & undergrowth.
Desc. 25 ft. over NW slope.
3.20 Wash, 10 lks. wide, course NE. Asc. 48 ft. over SE slope.
3.43 Intersect the NE side line (3-4) of the "Iron Hill" pat. lode mining claim, Min. Sur. No. 1385, at 3.46 chs. S.36°19'E. of Cor. No. 4 thereof. Across patented mineral land.
8.85 Spur, brs. SE. Desc. 23 ft. over SW slope.
9.30 Head of wash, course SE. Asc. 23 ft. over NE slope.
14.97 Intersect SW side line (1-2) of the "Gypsy" pat. lode mining claim, Mineral Survey No. 1385 at 3.58 chs. N.36°31'W., of Cor. No. 2 thereof. Leave patented mineral land.
16.74 Spur, brs. NE. Desc. 55 ft. over W. slope.
19.30 Head of wash, course NW. Asc. 55 ft. over NE slope.
20.70 Spur, brs. NW. Desc. 20 ft. over N. slope.
23.40 Spur, brs. NW. Desc. 81 ft. over W. slope.
31.40 Wash, 10 lks. wide, course N. Asc. 107 ft. over E. slope.
39.93 Set an iron post 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, deposit a stone marked with a cross (+) at base of post, raise a mound of stone about post for the ¼ sec. cor. of secs. 2 and 11, with brass cap marked

S 2
S 11

1930

No bearing trees available.
Asc. 63 ft. over SE slope.
42.00 Spur, brs. NE. Asc. 58 ft. over NE slope.
47.90 Spur, brs. N. Desc. 150 ft. over SW slope.
55.00 Head of wash, course NW. Asc. 8 ft. over NE slope.

Chains

17.70 Spur, brs. NW. Desc. 100 ft. over NE. slope.
21.40 Head of wash, course NW. Asc. 21 ft. over SW. slope.
25.00 Spur, brs. NW. Desc. 166 ft. over NE. slope.
31.00 Wash, 10 lks. wide; course NW. Asc. 6 ft. over S. slope.
36.80 Spur, brs. NW. Over level top of same.
39.15 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit a stone marked with a cross (x) at base of post, raise a mound of stone about post for the witness cor, to the ¼ sec. cor. secs. 1 and 2, with brass cap marked

W C
S 2 | S 1
1930

No bearing trees available.
Desc. 32 ft. over N. slope.
40.00 True point for the ¼ sec. cor. of secs. 1 and 2, falls in wash, 40 lks. wide, where it is impracticable to monument the cor., therefore establish witness cor. 85 lks. S. 0° 01' E., as hereinbefore described.
Asc. 141 ft. over S. slope.
47.70 Spur, brs. N. from SE. Desc. 106 ft. along N. slope to
74.91 Intersect the 2nd Std. Par. N. at 2.56 chs. E. of the Std. cor. of secs. 35 and 36, T. 9 N., R. 3 W., described in Book "A".
At point of intersection set an iron post 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bed rock, deposit a stone marked with a cross (x) at base of post, raise a mound of stone about post, for the closing corner of secs. 1 and 2, with brass cap marked

T 9 N R 3 W
S 36
S 2 | S 1
CC
T 8 N R 3 W
1930

No trees available.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, mesquite and palo verde.
Undergrowth, cacti, catclaw and palo christo.

- -

From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp. hereinbefore described.
N. 0° 01' W., on true line, bet. secs. 34 and 35.
Over mountainous land, thru scattering timber and undergrowth.
Desc. 10 ft. over NE. slope.
1.75 Wash, 10 lks. wide, course SE. Asc. gradual SW. slope.
4.15 Spur, brs. SE. Desc. 10 ft. over NE. slope.
5.35 Wash, near head, course E. Asc. 26 ft. over S. slope.
7.05 Spur, brs. E. Desc. 50 ft. over N. slope.
9.55 Wash, 15 lks. wide, course SE. Asc. 50 ft. over SW. slope.
12.06 Spur, brs. SE. Desc. 26 ft. over NE. slope.
13.50 Wash, 5 lks. wide, course SE. Asc. 89 ft. over S. slope.
16.56 Spur, brs. E. Desc. 58 ft. over N. slope.
19.45 Wash, near head, course E. Asc. 58 ft. over S. slope.
21.36 Spur, brs. E. Desc. 27 ft. over N. slope.

Chains	
	A conical peak, brs. N. 12° 45' W., plus 1° 45' V.A. No bearing trees available. Raise a mound of stone 3 ft. base, 1½ ft. high W. of cor. 5 ft. distant.
	Land, mountainous.
	Soil, rocky 4th rate.
	Timber, palo verde, mesquite and madrono.
	Undergrowth, oakbrush, catclaw and cacti.

	S. 89° 51' E., on a random line, bet. secs. 1 and 12.
40.00	Set temp. ¼ sec. cor.
80.16	Fall 16 lks. N. of the cor. of secs. 1, 6, 7 and 12, on E. bdy. of Tp., which is an iron post, 2 ins. in diam., firmly set, projecting 20 ins. above ground and mound of stone. No bearing trees.
	Thence, N. 89° 44' W., on true line, bet. secs. 1 and 12.
	Over mountainous land, thru scattering timber and undergrowth. Across "Washington" pat. lode mining claim, M. S. No. 1198. Desc. 6 ft. over gradual W. slope.
1.10	Intersect SW. side line (1-2) of "Washington" pat. lode claim, M. S. No. 1198, at 3.04 chs. N. 23° 22' W., from Cor. No. 1, thereof. Leave patented mineral land.
5.75	Wash, 10 lks. wide, course S. Asc. 234 ft. over E. slope.
14.50	Spur, brs. S. Desc. 96 ft. over W. slope.
19.20	Wash, 5 lks. wide, course S. Asc. 7 ft. over E. slope.
19.70	Spur, brs. S. Desc. 20 ft. over gradual E. slope.
21.80	Wash, 10 lks. wide, course SE. Asc. 147 ft. over NE. slope.
28.20	Spur, brs. SE. Over level land.
34.20	Spur, brs. S. Desc. gradually over W. slope.
37.40	Wash, near head, course S. Asc. 37 ft. over E. slope.
39.20	Spur, brs. S. Desc. 6 ft. over SW. slope.
40.08	Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, deposit a small track spike at base of post, raise a mound of stone about post, for the ¼ sec. cor. of secs. 1 and 12, with brass cap marked
	¼ S 1 / S 12 / 1930
	No bearing trees available.
46.10	Wash, 20 lks. wide, course SE. Asc. 149 ft. over E. slope.
51.70	Telephone line brs. S. 75° E., and N. 75° W.
55.55	Spur, brs. N. Desc. 59 ft. over NW. slope.
57.30	Wash, 10 lks. wide, course NE. Asc. 210 ft. over SE. slope.
63.70	Spur, brs. NE. Desc. 14 ft. over gradual NW. slope.
68.50	Head of wash, course N. Asc. 14 ft. over NE. slope.
70.20	Spur, brs. NW. Asc. 105 ft. over SW. slope.
76.45	Wash, 5 lks. wide, course NW. Asc. 25 ft. over NE. slope.
76.40	Spur, brs. NW. Desc. 19 ft. over gradual NW. slope.
79.50	Wash, 5 lks. wide, course NW. Asc. 6 ft. over NE. slope.
80.16	The cor. of secs. 1, 2, 11 and 12.
	Land, mountainous.
	Soil, rocky, 4th rate.
	Timber, palo verde, mesquite and madrono.
	Undergrowth, cacti, catclaw and palo christo.

	N. 0° 01' W., on true line, bet. secs. 1 and 2.
	Over mountainous land, thru scattering timber and undergrowth. Desc. 40 ft. over [illegible]
2.30	Telephone line, brs. E-W.
3.15	Intersection of washes from E.-SW-SE, thence NW. Asc. 15 ft. over SW. slope.
9.70	Spur, brs. W. Desc. 28 ft. over NW. slope.
11.75	Wash, near head, course W. Asc. 62 ft. over SW. slope.

Survey of the Subdivisional Lines of T.8 N., R.3 W.

Chains	
	Desc. 16 ft. over SW slope.
41.30	Wash, 10 lks. wide, course SE. Asc. 98 ft. over E. slope.
46.10	Spur, brs. N. Desc. 17 ft. over W. slope.
48.20	Head of wash, course N. Asc. 128 ft. over SE slope.
53.00	Spur, brs. NE. thence over top of ridge from W. to SE.
58.00	Leave ridge to NW. Desc. 48 ft. over SW slope.
64.30	Wash, 5 lks. wide, course S. Asc. 65 ft. over E. slope.
67.50	Spur, brs. S. Desc. slight S. slope.
74.00	Spur, brs. SW. Desc. 173 ft. over SW slope.
78.50	Mouth of wash, from NE. Asc. 12 ft. over SE slope.
80.20	The cor. of secs. 11, 12, 13 and 14.

Land, mountainous.
Soil, rocky 4th. rate.
Timber, paloverde, mesquite and madrono.
Undergrowth, cacti, catclaw and palochristo.

N.0°01'W., on true line, bet. secs. 11 and 12.
Over mountainous land, thru scattering timber & undergrowth.

8.15	Asc. 192 ft. over SW slope.
14.00	Spur, brs. SW. Desc. 31 ft. over NW slope.
15.65	Head of wash, course SW. Asc. 100 ft. over SE slope.
21.00	Branch spur, brs. SW.
24.90	Main spur, brs. SE. Desc. 25 ft. over NE slope.
	Wash, 5 lks. wide, course SE. Heads 2 chs. NW.
29.20	Asc. 49 ft. over SW slope.
32.40	Ridge, brs. NW-SE. Desc. 69 ft. over N. slope.
35.75	Wash, 10 lks. wide, course E. Asc. 75 ft. over S. slope.
40.00	Spur, brs. E. Desc. 93 ft. over NW slope.
	Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, deposit an iron bolt 2 ins. in diam., at base of post, raise a mound of stone about post, for the ¼ sec. cor. of secs. 11 and 12, with brass cap marked

S11 | S12

1930 from which,

	a madrono, 6 ins. in diam., brs. S.85°W., 172 lks. dist., marked ¼ S11 BT
	No other trees available.
43.40	Desc. 91 ft. over NW slope.
47.00	Wash, 10 lks. wide, course NE. Asc. 28 ft. over SE slope.
53.75	Spur, brs. NE. Desc. 126 ft. over NW slope.
59.83	Wash, 30 lks. wide, course E., road in same. Asc. 343 ft. over S. slope.
	Intersect the SW side line of the "Iron Hill" (1-2) pat. lode mining claim, Min. Sur. No. 1585 at 1.08 chs. N.36°19'W. of Cor. No. 2 thereof.
	Across patented mineral land.
71.00	Ridge, brs. NW-SE. Desc. 192 ft. over NE slope.
75.33	Intersect the NE side line (3-4) of the "Iron Hill" pat. lode claim at 13.22 chs. N.36°19'W. of Cor. No. 3 thereof.
	Leave patented land.
80.00	Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for the cor. of secs. 1, 2, 11 and 12, with brass cap marked

T8N	R3W
S2	S1
S11	S12

1930 from which,

Retracement of Patented Mining Claims in T.8 N., R.3 W.

Chains	
	Beginning at Cor. No.1 of the "Congo" pat. lode claim, Thence, S.22°53'E., on true line, on SW side line, tords flag visible on Cor. No.2.
22.20	Intersect Cor. No.2. True course and dist. of the SW side line of the claim are therefore S.22°53'E., 22.20 chs.
	From Cor. No.1 of the "Gypsy" pat. lode mining claim, S.36°31'E., on true line, tords flag visible on Cor. No.2, along SW side line.
22.88	Intersect Cor. No.2. True course and dist. of the SW side line are therefore S.36°31'E., 22.88 chs.
	From Cor. No.1 of the "Iron Hill" pat. lode claim, S.36° 19'E., on true line, on SW side line, tords flag visible on Cor. No.2.
22.48	Intersect Cor. No.2. True course and dist. of the SW side line are therefore S.36°19'E., 22.48 chs.
	Thence, N.51°30'E., on true line, on SE end line of claim, tords flag visible on Cor. No. 3.
9.14	Intersect Cor. No.3. True course and dist. of the SE end line are therefore N.51°30'E., 9.14 chs.
	Thence, N.36°19'W., on true line, on NE side line of claim, tords flag visible on Cor. No.4.
22.57	Intersect Cor. No.4. True course and dist. of the NE side line are therefore N.36°19'W., 22.57 chs.
	Thence, N.36°31'W., on true line, on NE side line of the "Gypsy" pat. lode mining claim, tords flag visible on Cor. No.4.
22.88	Intersect Cor. No.4 of the claim. True course and dist. of the NE side line are therefore N.36°31'W., 22.88 chs.
	Thence, N.22°53'W., on true line, on NE side line of the "Congo" pat. lode mining claim.
22.20	Intersect Cor. No.4. True course and dist. of the NE side line are therefore N.22°53'W., 22.20 chs.
	"Washington" pat. lode claim Min. Sur. No.1198 in secs. 1, 6, 7 and 12, Ts. 8 N., Rs. 2-3 W.
	Beginning at Cor. No.1, thence, N.23°22'W., on true line, on SW side line, tords flag visible on Cor. No.2.
15.34	Intersect Cor. No.2. True course and dist. of the SW side line are therefore N.23°22'W., 15.34 chs.
	Thence, N.66°E., on true line, on NW end line, tords flag visible on Cor. No.3.
8.16	Intersect Cor. No.3. True course and dist. of the NW end line are therefore N.66°E., 8.16 chs.
	Thence, S.26°42'E., on true line, tords flag visible on Cor. 4, on NE side line.

Retracement of unpatented and patented Mining Claims in T.8 N., R.3 W.

Chains	
16.80	Intersect Cor. No. 2;
	True course and dist. of NE part of NW side line of claim are therefore S.52°00'20"W., 16.80 chs.
	Thence, S.26°08'40"W., on true line, tords flag visible on Cor. No.3, on part of the NW side line.
3.35	Intersect Cor. No.3.
	True course and dist. of this part of the NW side line are therefore S.26°08'40"W., 3.35 chs.
	Thence, S.38°33'E., on true line, on SW end line, tords flag visible on Cor. No. 4.
9.09	Intersect Cor. No. 4.
	True course and dist. of the SW end line are therefore S.38°33'E., 9.09 chs.
	Thence, N.26°08'40"E., on true line, on SE side line (part) tords flag visible on Cor. No. 5.
3.18	Intersect Cor. No.5.
	True course and dist. of this part of SE side line are therefore N.26°08'40"E., 3.18 chs.
	Thence, N.52°00'20"E., on true line, tords flag visible on Cor. No.6 (part of the SE side line.)
16.80	Intersect Cor. No.6.
	True course and dist. of this part of the SE side line are therefore N.52°00'40"E., 16.80 chs.
	Thence, N.38°33'W., on true line on NE end line of claim, tords flag visible at Cor. No.1.
9.30	Intersect Cor. No.1.
	True course and dist. of the NE end line of claim are therefore N.38°33'W., 9.30 chs.
	Patented Min. Sur. No.1353. in secs. 34 & 35, T.9 N., R.3 W. and sec. 2, T.8 N., R.3 W.
	Beginning at Cor. No.5 of the "Sellairs", thence, S.26°E., on true line, on SW side line of the claim, tords flag visible on Cor. No.6.
14.94	Intersect Cor. No.6.
	True course and dist. of the SW side line are therefore S.26°E., 14.94 chs.
	From Cor. No.5 of the "Flying Dutchman", thence, N.60°E., on true line, on SE end line, tords flag visible on Cor. No.1.
9.00	Intersect Cor. No.1.
	True course and dist. of the SE end line of claim are therefore N.60°E., 9.00 chs.
	Thence, N.60°E., on true line, on SE side line of the "Homestake No.2", tords flag visible on Cor.1.
9.00	Intersect Cor. No.1.
	True course and distance of SE side line of the claim are therefore N.60°E., 9.00 chs.
	Patented Min. Sur. No.1385 in secs. 2 and 11, T.8 N., R. 3 W.
	Beginning at Cor. No.1 of the "South Amazon", thence, S.28°E., on SW side line of claim, tords flag visible at Cor. No.2.
22.76	Intersect Cor. No.2.
	True course and dist. of SW side line are therefore S.28°00'E., 22.76 chs.