

CONTACT INFORMATION

Mining Records Curator Arizona Geological Survey 1520 West Adams St. Phoenix, AZ 85007 602-771-1601 http://www.azgs.az.gov inquiries@azgs.az.gov

The following file is part of the

Arizona Department of Mines and Mineral Resources Mining Collection

ACCESS STATEMENT

These digitized collections are accessible for purposes of education and research. We have indicated what we know about copyright and rights of privacy, publicity, or trademark. Due to the nature of archival collections, we are not always able to identify this information. We are eager to hear from any rights owners, so that we may obtain accurate information. Upon request, we will remove material from public view while we address a rights issue.

CONSTRAINTS STATEMENT

The Arizona Geological Survey does not claim to control all rights for all materials in its collection. These rights include, but are not limited to: copyright, privacy rights, and cultural protection rights. The User hereby assumes all responsibility for obtaining any rights to use the material in excess of "fair use."

The Survey makes no intellectual property claims to the products created by individual authors in the manuscript collections, except when the author deeded those rights to the Survey or when those authors were employed by the State of Arizona and created intellectual products as a function of their official duties. The Survey does maintain property rights to the physical and digital representations of the works.

QUALITY STATEMENT

The Arizona Geological Survey is not responsible for the accuracy of the records, information, or opinions that may be contained in the files. The Survey collects, catalogs, and archives data on mineral properties regardless of its views of the veracity or accuracy of those data.

PRINTED: 08/29/2001

ARIZONA DEPARTMENT OF MINES AND MINERAL RESOURCES AZMILS DATA

PRIMARY NAME: HOOPES LIMESTONE

ALTERNATE NAMES:

GILA COUNTY MILS NUMBER: 198

LOCATION: TOWNSHIP 2 N RANGE 15 E SECTION 31 QUARTER C LATITUDE: N 33DEG 28MIN 20SEC LONGITUDE: W 110DEG 52MIN 00SEC

TOPO MAP NAME: GLOBE - 7.5 MIN

CURRENT STATUS: PAST PRODUCER

COMMODITY:

CALCIUM LIMESTONE MILL LIME PLANT

BIBLIOGRAPHY:

BLM MINING DISTRICT SHEET 165 ADMMR HOOPES LIMESTONE FILE GEO FILE - MIERITZ, RICHARD, 1970

ARIZONA DEPARTMENT OF MINES AND MINERAL RESOURCES FILE DATA

PRIMARY NAME: HOOPES LIMESTONE

ALTERNATE NAMES:

GILA COUNTY MILS NUMBER: 198

LOCATION: TOWNSHIP 2 N RANGE 15 E SECTION 31 QUARTER C LATITUDE: N 33DEG 28MIN 20SEC LONGITUDE: W 110DEG 52MIN 00SEC

TOPO MAP NAME: GLOBE - 7.5 MIN

CURRENT STATUS: PAST PRODUCER


COMMODITY:

CALCIUM LIME

BIBLIOGRAPHY:

BLM MINING DISTRICT SHEET 165 ADMMR HOOPES LIMESTONE FILE Hoopes Limestone

Slob 7.5

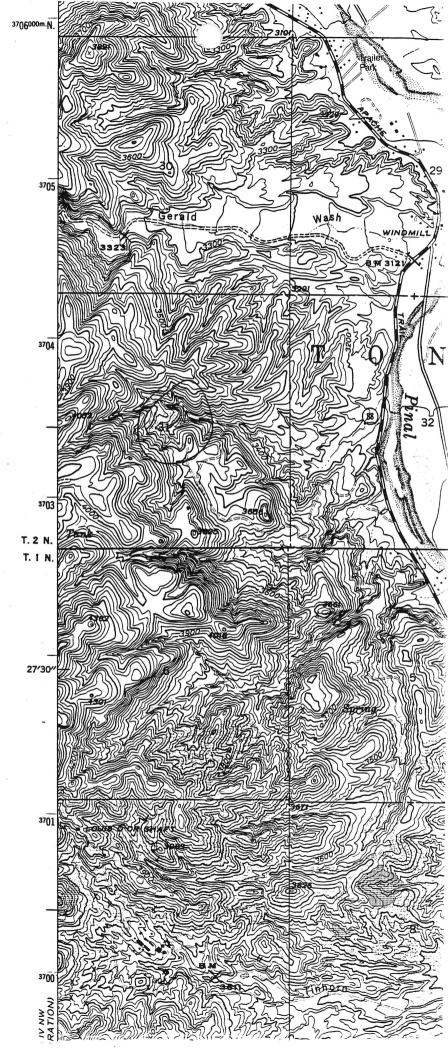

GEOLOGIC EVALUATION

REPORT

on the

HOPES LIMESTONE PROPERTY

in ·

Gila County, Arizona

by

R. J. Mieritz Mining Consultant Phoenix, Arizona

June 26, 1970

	Page
INTRODUCTION	. 1
CONCLUSIONS	. 1
PROPERTY, LOCATION and ACCESSIMILITY	. 1
FACILITIES	1.
GEOLOGY	2
DEVELOPMENT	- 3
SAMPLING	. 3
SAMPLE COMMETTS	4
RAW MATERIAL RESERVES	- 5
EXPLORATION	. 5

Map No. 1 - INDEX MAP

Map No. 2 - GENERAL GEOLOGIC MAP

Map No. 3 - SURFACE MAP - Hoopes Main Quarry

Map No. 4 - SURFACE MAP - Hoopes Marily Operation

IMPRODUCTION:

At the request of and authorization by Mr. G. A. Freeman, Home-Stake Production Co., Phoenix, the writer completed a geologic examination of the Hoopes Lime Plant limestone deposit in Parts of Sec. 31. T. 2 N., R. 15 E. and Sec. 6 T. 1 N., R. 15 E., G. & S. R. B. & M., approximately 5 miles by road from the junction of State Route 38 with U. S. Route 60-70, halfway between the towns of Globe and Miami, Gila County, Ariz.

The writer spent several days on the property examining the surface geology and mapping those areas from which limestone had and is being mined to supply the Lime Flant.

COMCLUSIONS:

Based on the information gained during the examination and the writers geologic knowledge of such deposits, the following conclusions are forwarded for your consideration:

- (1) The limestone deposits are not developed by drilling, consequently no measured or assured reserves exist except those small amounts which are developed by the presently worked pit or quarry.
- (2) It is estimated that the property has an inferred potential of 1.5 million tons of material suitable for line production from the Escabrosa formation. It is also likely that an equivalent amount may exist in the Martin formation adjacent to the Escabresa formation on the west.
- (3) Exploration of the deposits by diamond drilling would be required to reclassify the estimated inferred tempage of conclusion 2 to a more positive status.

PROPERTY, LOCATION and ACCESSIBLE TO

The property consists of two groups of Placer claims, one group is patented. The first group, patented, includes seven claims and the second group includes eight claims - or a total of approximately 300 acres. Mr. Scopes has a print of a surveyed plat of the claims.

Travel to the property from the junction of State Route 88 and U. S. Route 60-70 is north on State Route 38 for 4.35 miles to a sign "Hoopes Lime Flant" on the left side of State Route 88. From this point it is 0.9 mile over a well maintained gravel road to the "workshop" area on the property. A network of roads lead to the lime plant, open pit quarrys and underground mine operations. Fravel over most of the property can be completed by automobile.

FACILITIES:

Hoopes lime Plant is operated by "piped in" natural gas and "highline" electric power. Mater, when needed, is hauled the short distance from Final Creek Valley to the property. A 3 inch water line is in place

from the workshop area to Pinal Creek and was probably used during the underground operation.

GECTOMI:

The general goology of the area is that of the Escabrosa limestone. Haco limestone formation and Martin limestone formation with nearby exposures of decite, diabase and two conglomerates, the Whitetail and Gila.

The area is also one of many faults creating tilting of the limestone formations as well as upward and downward displacements of the limestone formations which has had an overall effect of creating "islands" of limestone and presents a most difficult problem of attempting to determine depth and extension of the formations for the purpose of estimating tonnege.

The Escabrosa limestone in the particular area brends approximately N. 10-20° N. and dips 35 to 55° to the east. Fart of the formation is indistinctly bodded, but most of it is quite thinly bedded, onlytic, fine grained to moderately crystalline, mostly medium gray and in some instances contains chert modules which are sparse to abundant.

From the evidence at hand, it appears there is, within the Escabrosa formation, but one layer (composed of several beds), approximately 50 to 60 feet wide normal to the dip which is suited to the production of lime for use in the copper mills in the area. A second but much narrower zone might possibly meet lime production specifications. It is not possible, without petrographic study, to clearly determine the stratigraphic position of this former "good" layer within the formation. The writer suspects its position to be in the upper third of the formation, but can not be certain.

There are three exposures of the Escabrosa limestone formation within the property. The largest of these is at the location of the lime plant and extends westward and northward. This area, approximately 1600 feet long and 300 feet wide, probably exposes the full formation thickness (250 feet normal to dip) which strikes H. 20° W. and dips 25 to 30° E. Hoopes obtained limestone by underground mining from an area just west of the lime plant. See Map No. 4. The position of this layer is probably in the middle of the formation. This outcropping has not been prespected except by a few larger than normal surface pits along its strike. The sutcropping formation must be drilled.

The second Economics formation appears is surrently providing the "feed" to the lime plant. This exposure, approximately '00 feet long and 300 feet wide, striking 5. 10 %, to North and dipping 40 to 55 %. Hay or may not represent the full thickness of the formation, but it does contain a 50 to 60 feet, normal to dip, thinkness of limestone which is being mined. The writer suspects this "layer" is in the upper third of the formation. The Footwall of the "good" bad is controlled by a bedding fault with a smooth wall. The underlying layer is siliceous and argillaceous.

The third outcropping is a very small faulted "block" or "island", approximately 300 feet southeast of the second exposure. Area-wise, it is too small for consideration at this time. It has not been explored.

The Martin limestone Formation crops out to the west of the Escabrosa formation currently being mined. (See Map No. 3) Sample #1092 indicates a good lime content with a silica content just under 2%. With adequate exploratory drilling it may be possible to indicate 1.5 million tons of near marginal specification limestone.

DEVELOP-ENT:

To supply the lime plant, Mr. Hoopes has mined fair amounts of material from two large underground "rooms" in a canyon above, or west of, the lime plant, attempted excavation (removal of surface debris) in three separate localities and is currently obtaining his raw material from one 50 to 60 foot wide some approximately 0.3 miles from the lime plant. (See Haps Ho. 2 and 3 and 4).

The operation at the latter has opened up a 50 to 60 foot wide "good" raw material for about 400 feet along the M. 10° M. strike. The some dips from 40 to 55° 3. Production comes from two benches or levels with an approximate 50 to 60 foot difference in elevation. The upper bench is approximately 50 feet lower than the surface at its northern face. In the vicinity of this operation, the "good" limestone some forms part of the hillside and thus has a favorable mining situation, but extensions to the northwest and southeast "enter" the hill and could require overburden removal on the hanging wall to attain any great depth.

The footwall of the "good zone" is controlled by a "bedding fault" with a slick-smooth face and is quite continuous except where offset short distances by minor cross faults.

The hanging wall also appears to be a bedding fault. This is based on the results of sample 1083. The silics content increased a fair amount east of this fault. The dacite-limestone contact is about 50 to 60 feet east of the hanging wall bedding fault and the contact dip is 48° E. near the throat of the Pit.

SAMPLING

To obtain some information as to calcium carbonate and silica contents of the raw material being mined, the footwall material and other portions of the Escabrosa formation, the writer took 13 samples. This figure includes other samples taken elsewhere on the property to aid the writer in determining the location and extent of the raw material which might be suited for lime production. The assay results and sample discriptions are as follows:

£1080	•	Crab, bal	ow upper bench an	d west of Pootwall.	99•1	3.540h
H031	•	40 ft. ac	ress "good sone",	north Face, U. B.	91.5	3.18
#1082	•	50 M. al	ong "good sone",	east face. J. 3.	93.2	5.36

	\$ 0aC03	3 3300
#1083 - 40 Ft. across zone, north bank Pit throat,	92.5	5.79
east of fault.		
MOSA - 25 Ft. across F.M. zone, west of fault. L. B.	37.3	3.62
MOS5 - 40 Ft. along F. W. zone, west of fault. L. B.	86.9	11.50
#1086 - Greb of muck being mined June 16, 1970, L. B.	96.9	1.08
M1087 - 50 Ft. across some, north bank, L. B.	96.7	
MOSS - 50 Pt. across sone underlying Falla zone, West	96.2	2.71
of 元t.		
\$1089 - Chip sample of large float pieces approx. 350	95.7	3.23
feet north of upper bench face, in saddle.		
#1090 - 70 Ft. chip cample along west wall of couth	99.4	0.43
underground rock.		
#1091 - 70 Ft. chip sample along west wall of north	92.5	1.17
underground room.		
11092 - 40 Ft. chip sample across south bank of Quarry.		1.37
1 600 feet west of present Quarry (Martin Los ?)		

Note: - U. D. indicates upper bench. L. B. indicates lower bench. See Maps No. 3 and 4 for semple locations.

SAMPLE COMMETTS:

Results of the 13 samples would indicate that cilica is quite a problem - even in the present quarry operation which utilizes the "better" layer of the Escabrosa formation.

Samples 1886, 97, 81, 82 and 89 indicate there is a trend for the milica content as well as the 3203 content, to increase to the north.

Samples 1934 and 35, taken in the Footwall material has high silica content as well as a high 3503 content, particularly as shown in sample 1984 which cross out the Footwall zone.

Sample 1089 represents the hanging wall material sast of the bedding foult shown on Map No. 3. This material is also very siliceous, thus limiting the "good layer".

Samples 1030 and 1038 represent the material underlying the Footwall zone. The milica content of this material may be acceptable - but could be very errette in distribution. This some might well be the same some that was mined by underground method near the lime plant.

Sample 1092 could represent a portion of the Martin formation. The silica content is just within specifications, however, it appears there may be a 2% Reda content (aluminum and iron).

Samples 1090 and 91 represent a portion of the Escabrosa limestone mined by underground method. (See Map No. 4). It is thought that this some is identical to the zone underlying the Footwall zone in the present quarry operation. The physical characteristics are similar and the chamical compositions compare favorably. (Samples 1080 and 1088).

RAW MATERIAL RESERVE:

In the vicinity of the present Pit, it is only possible for the writer to project the "good zone" approximately 300 feet to the north and 100 feet to the south. Depth-wise, below the present pit bottom, only a 40 foot projection is justified because of the inconsistency and geologic nature of the area.

This basically resolves itself into a block with dimensions of 800 feet long, 50 feet wide and an average of 120 feet high - or approximately 480,000 tons less approximately 125,000 tons which have already been mined which leaves a resulting inferred reserve of 355,000 tons.

If this same critaria for the "good layer" in the Escabrosa formation should exist in the exposure west and morth of the lime plant, then 1.2 million tons may exist as a block 50-60 feet wide, 150 feet deep (down dip) and 1600 feet long.

Based on the results of sample \$1092 and the area of exposure of the Martin limestone in the area, the writer could infer approximately 1.5 million tons of suitable limestone for lime production.

EXPLOPATION:

The two main Escaprosa formation areas should be explored by diamond drilling as well as the Martin limestone exposure to the west of the present At.

In the main quarry area, two holes should be drilled between the north bank of the upper bench and the "saddle" to the north to determine the possible extension and grade of the some being mined.


In the exposure west and north of the lime plant, two holes should be drilled at approximately 600 foot intervals to penetrate the full thickness of the formation to determine the presence of the "good layer" in this area as well as to test for the presence of the layer mined by underground method.


Several 300 to 400 foot drill holes would be required to explore the Martin limestone formation adjacent to and west of the present quarry operation.

Respectfully submitted.


R...B. Mieritz. Mining Consultant Phoenix. Arizona

June 26, 1970

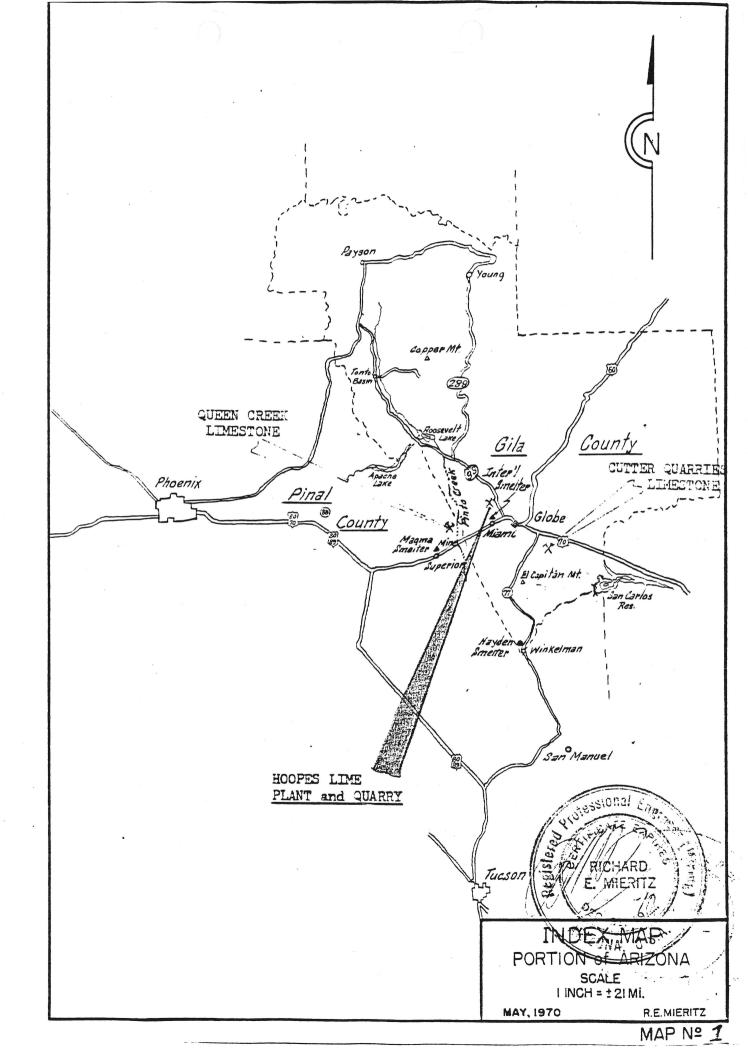


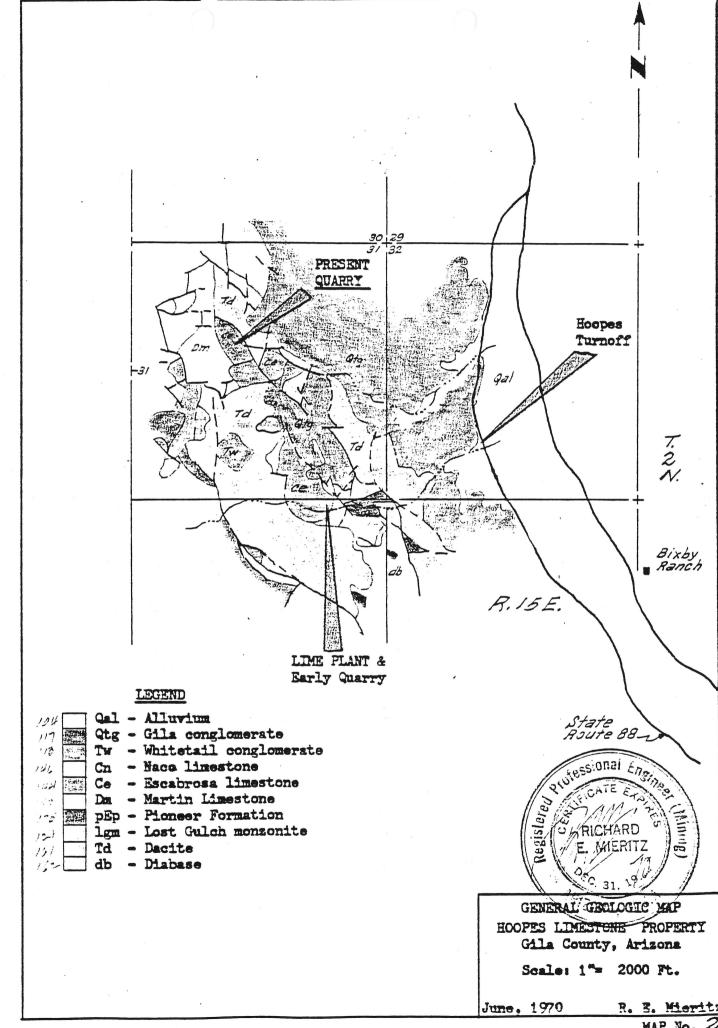

MAP No.

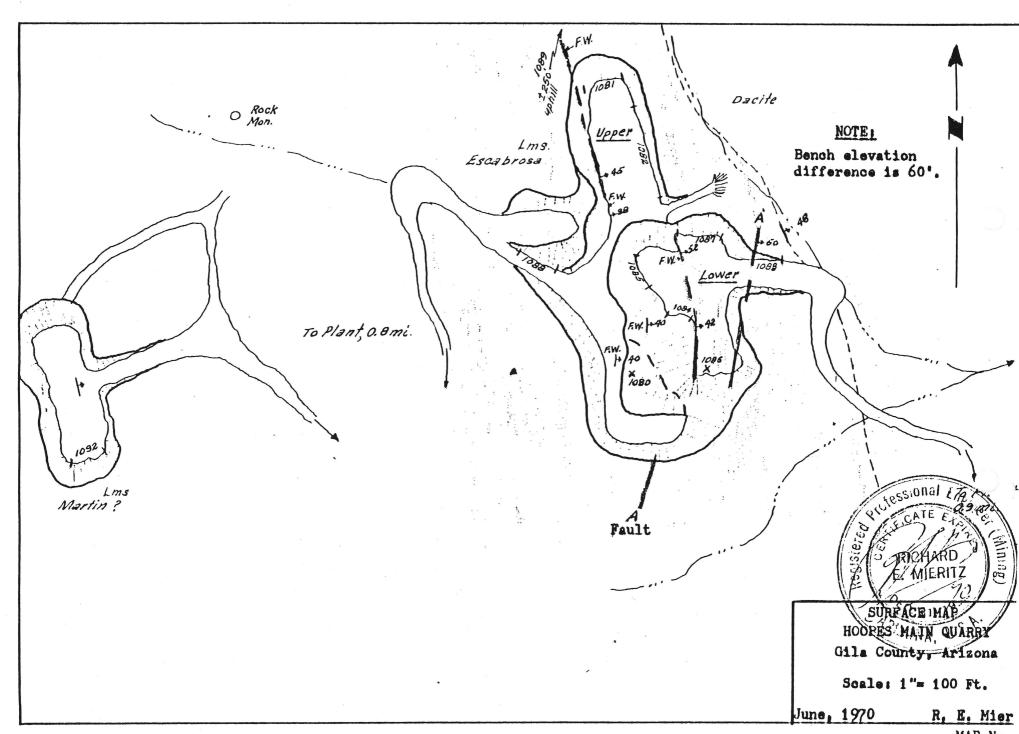

MAP No.

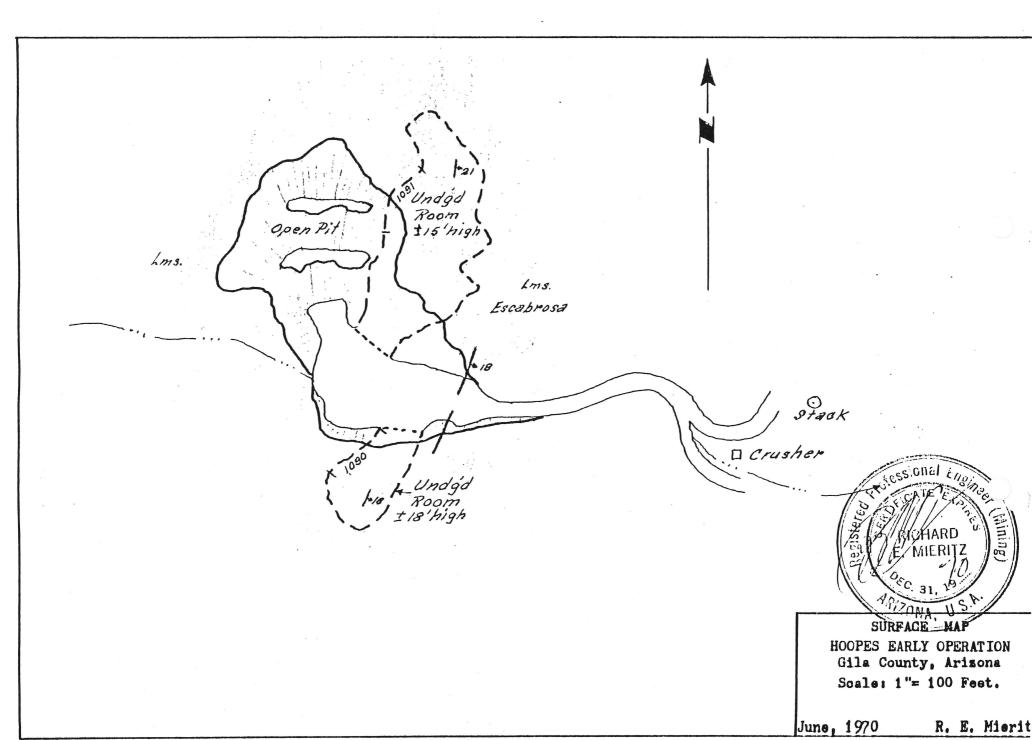

MAP No. 4