



INDUCED POLARIZATION TRAVERSE
SECTIONAL DATA SHEET
for
PLATA VISTA MINING COMPANY

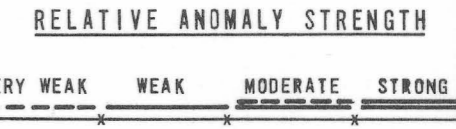


DIPOLE DIPOLE ELECTRODE ARRAY

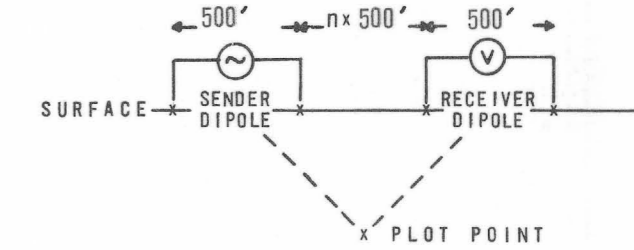

AREA
PLATA VISTA PROJECT
LOOKING
WEST
DATE
MAR 1972
SCALE

HEINRICHS
GEOEXPLORATION COMPANY
AUSTRALIA (SYDNEY) 39 Hume Street Crows Nest, NSW Phone: 439-1793
U.S.A. Post Office Box 5964 Tucson, Arizona 85703 Phone: (602) 623-0578 Cable: GEDEX, Tucson

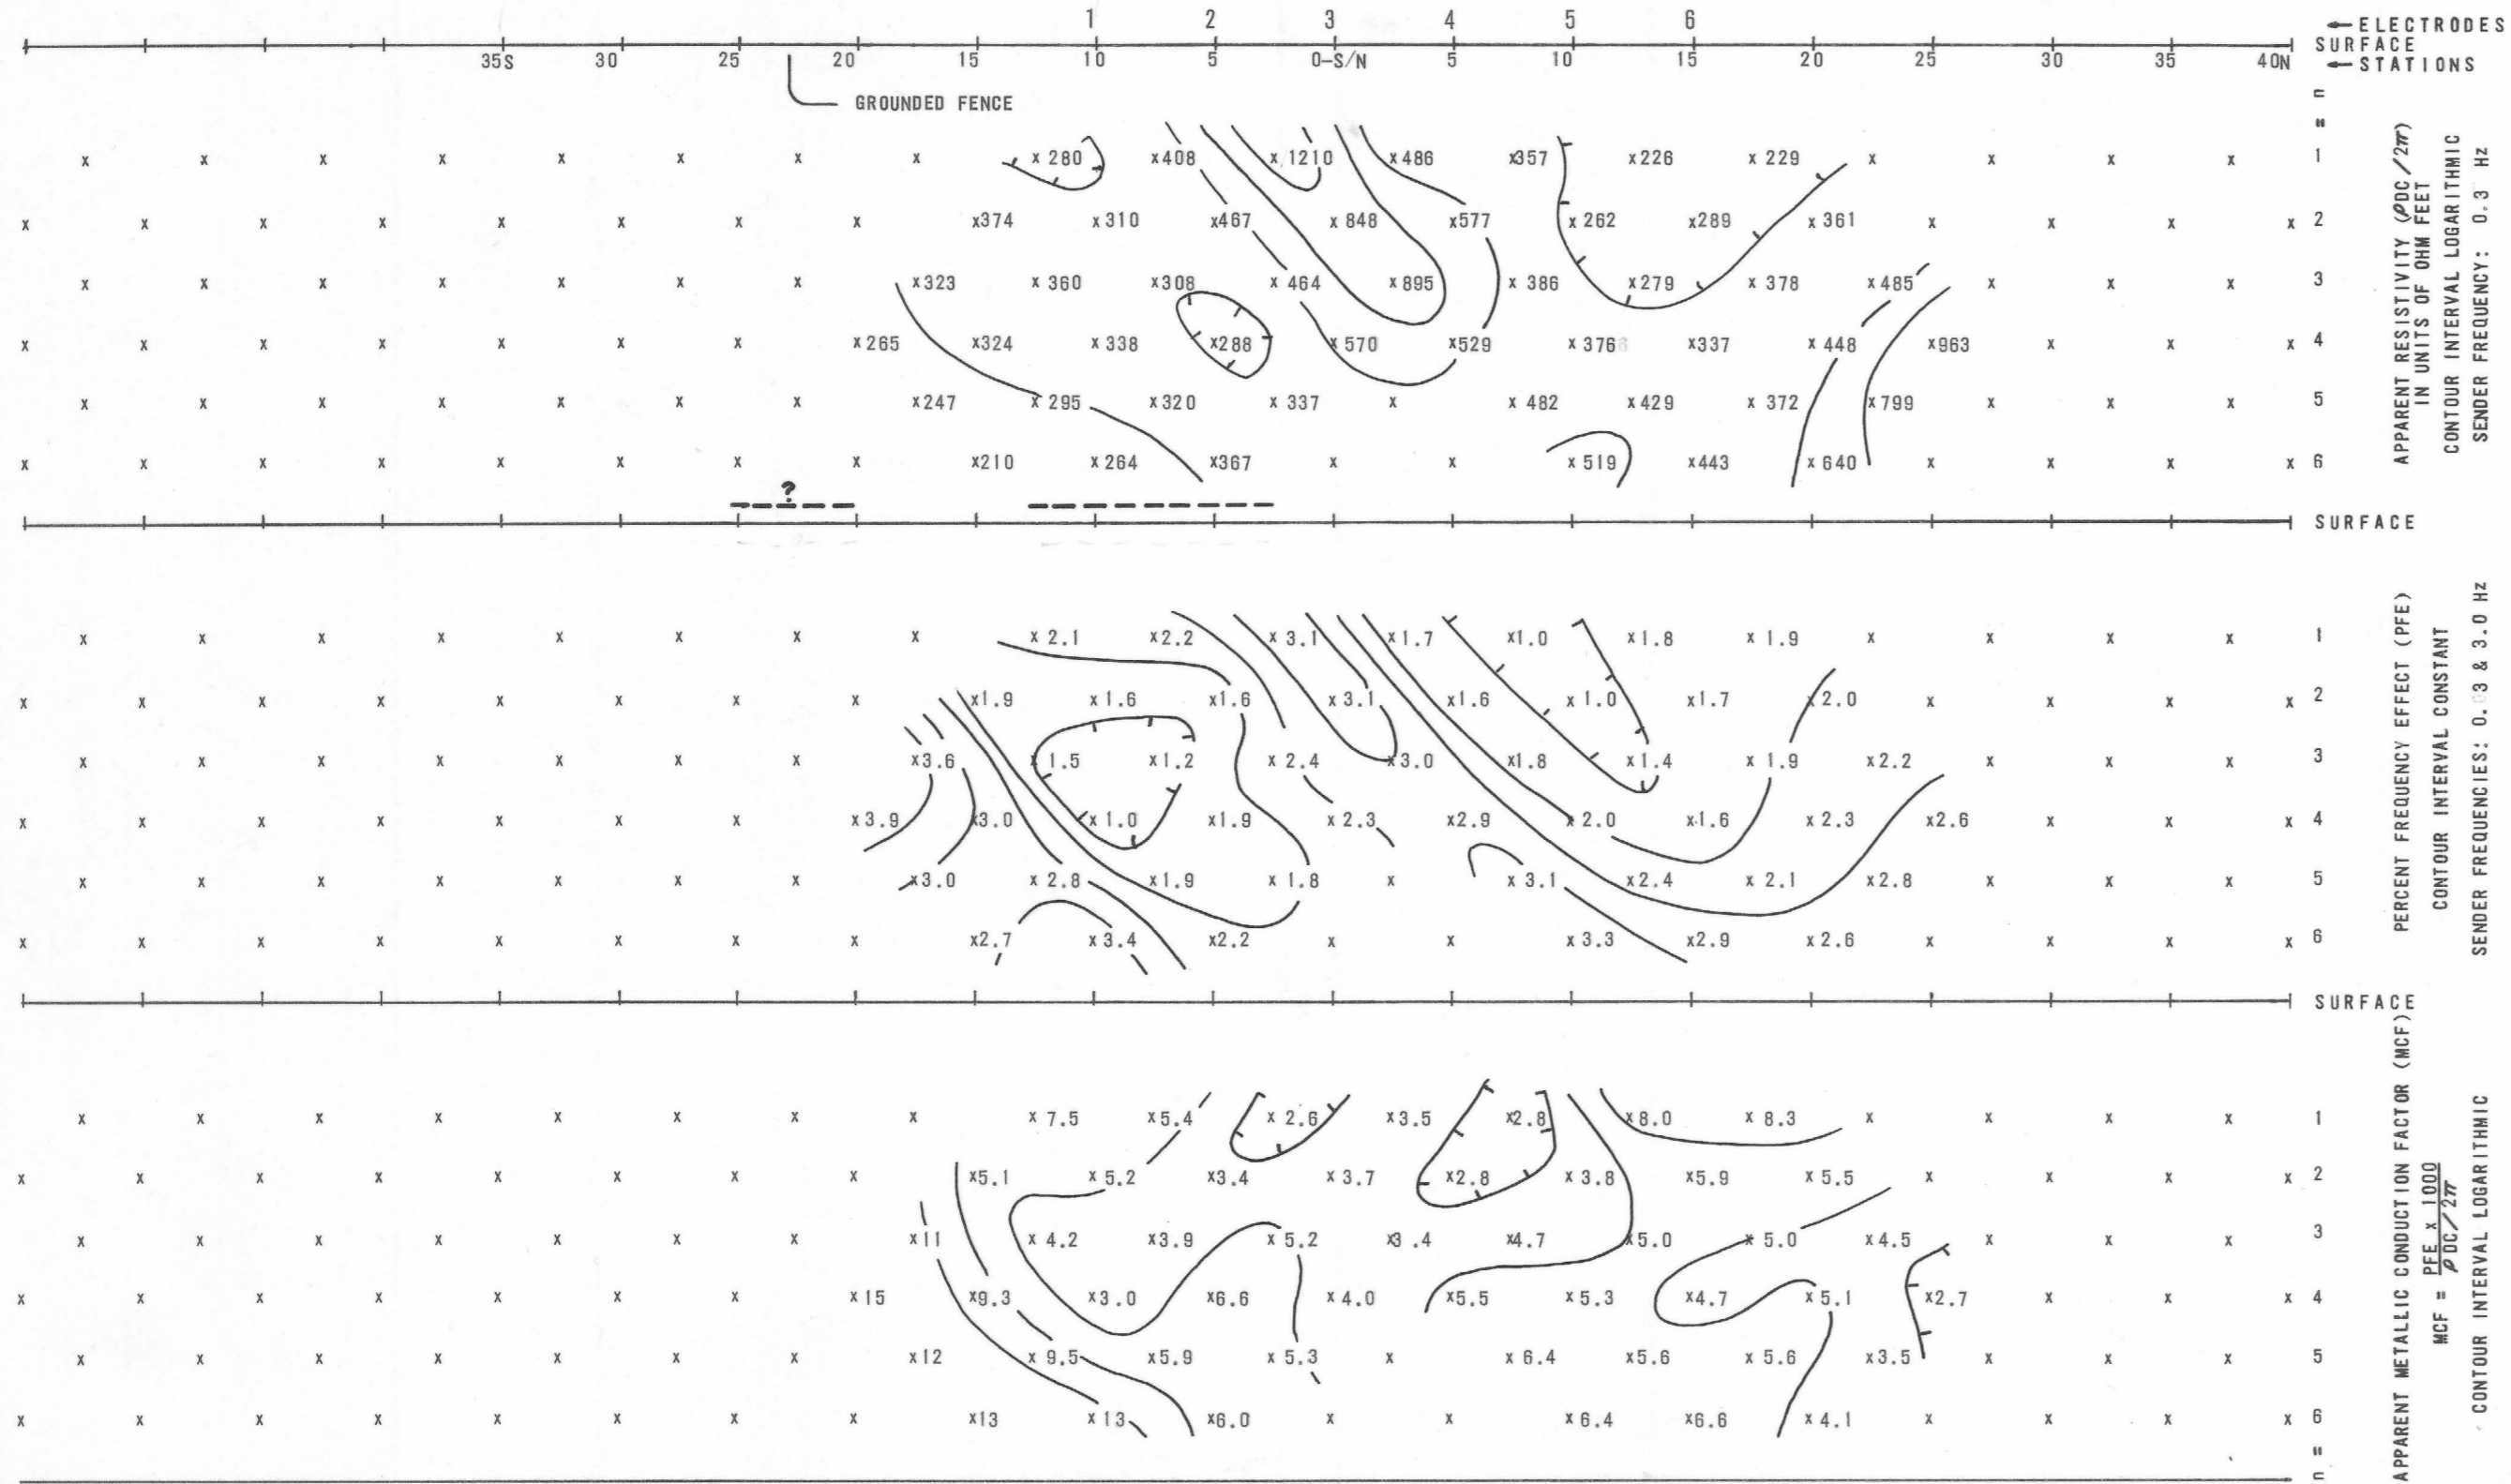

ELECTRODES SURFACE STATIONS
APPARENT RESISTIVITY ($\rho_{DC}/2\pi r$) IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.3 Hz
PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.3 & 3.0 Hz
APPARENT METALLIC CONDUCTION FACTOR (MCF)
 $MCF = \frac{PFE \times 1000}{\rho_{DC}/2\pi r}$
CONTOUR INTERVAL LOGARITHMIC

