



INDUCED POLARIZATION TRVERSE
SECTIONAL DATA SHEET
of
PICO AREA
for
NORTH AMERICAN MINES, INC.

RELATIVE ANOMALY STRENGTH




DIPOLE-DIPOLE ELECTRODE ARRAY

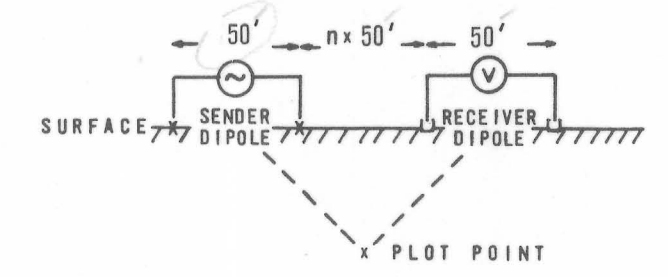


DATE
MAY 1973


HEINRICH'S GEOEXPLORATION COMPANY
806 W. GRANT ROAD, POST OFFICE BOX 5964, TUCSON, ARIZ., 85703, PHONE: (602)623-0578

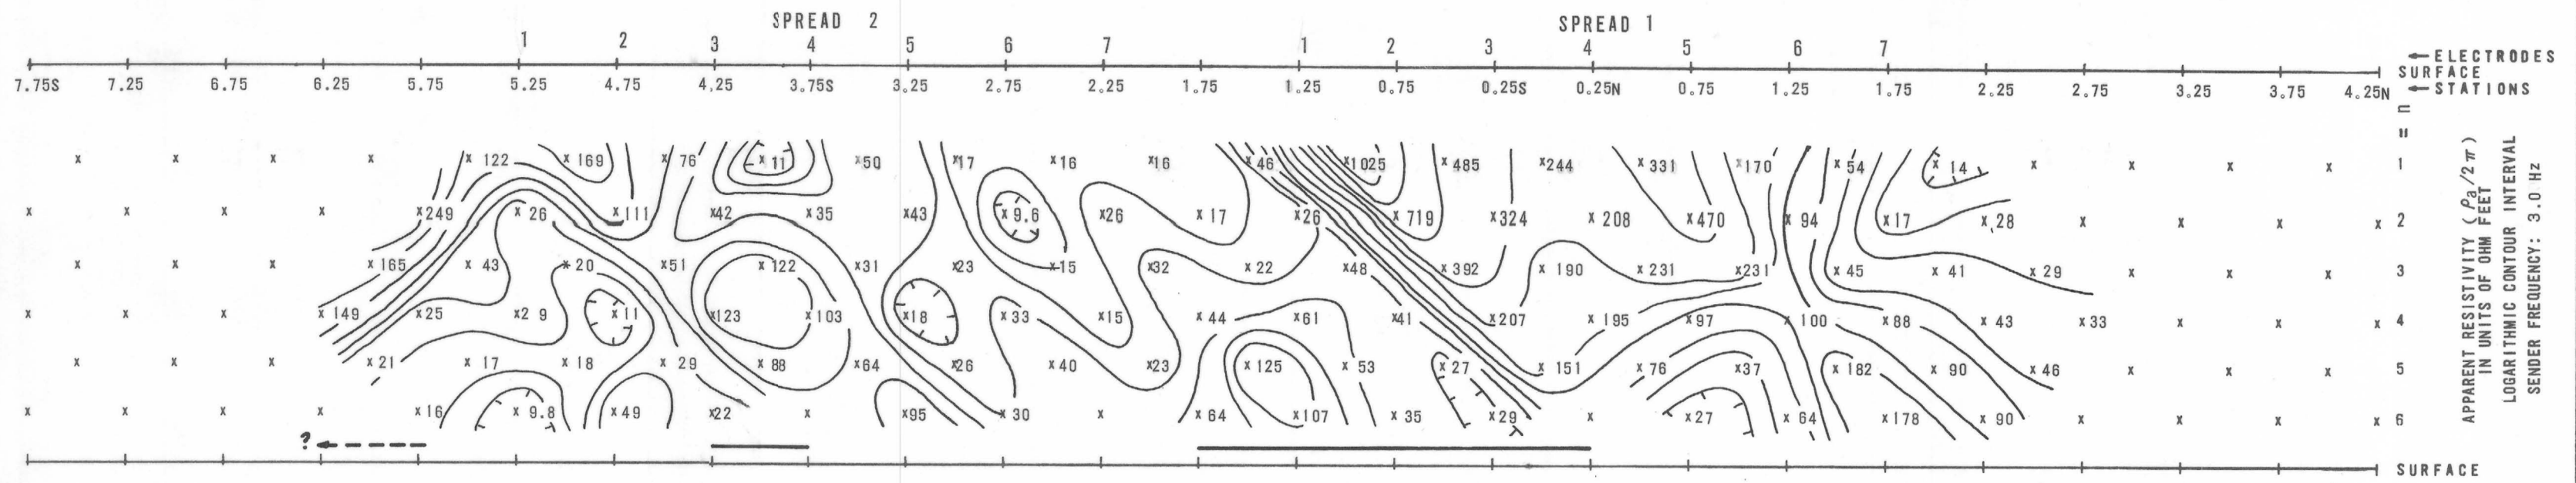


APPARENT RESISTIVITY ($\rho_a/2\pi$)
IN UNITS OF OHM FEET
LOGARITHMIC CONTOUR INTERVAL
SENDER FREQUENCY: 3.0 Hz

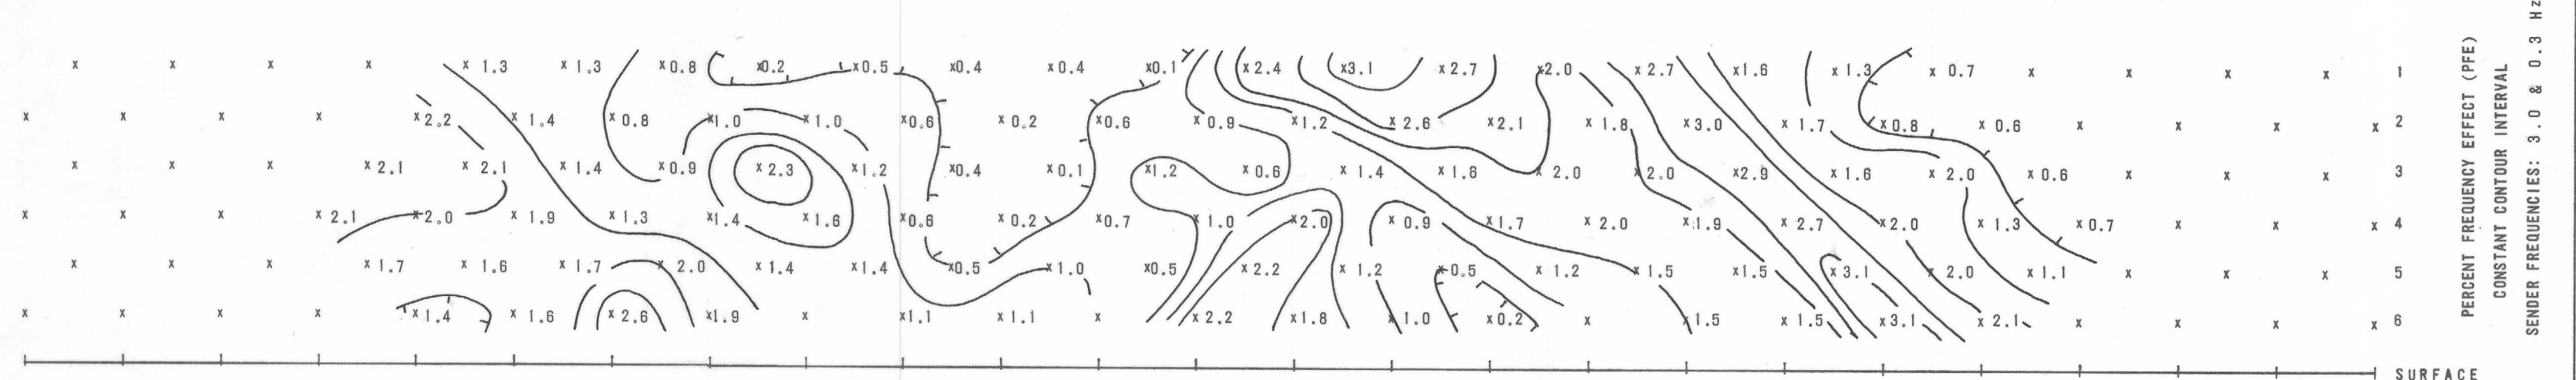

PERCENT FREQUENCY EFFECT (PFE)
CONSTANT CONTOUR INTERVAL
SENDER FREQUENCIES: 3.0 & 0.3 Hz

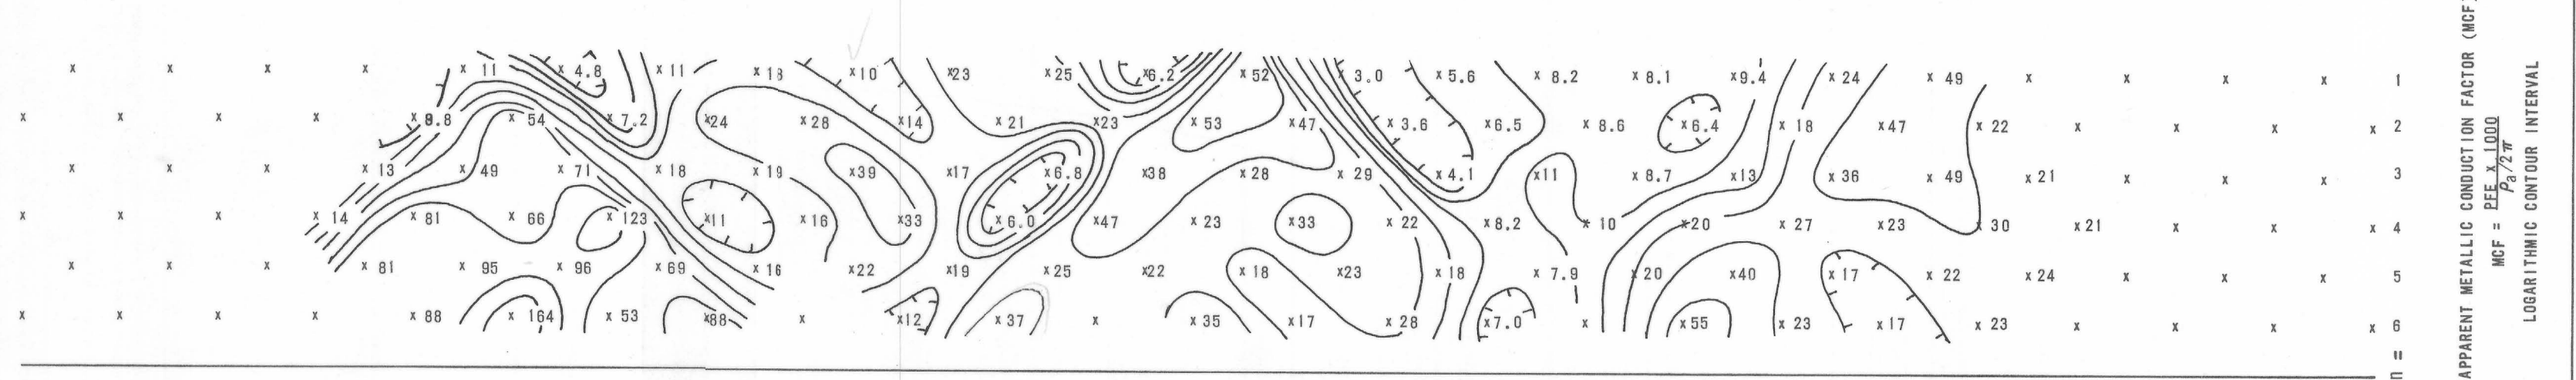

APPARENT METALLIC CONDUCTION FACTOR (MCF)
MCF = $\frac{PFE \times 1000}{\rho_a}$
LOGARITHMIC CONTOUR INTERVAL

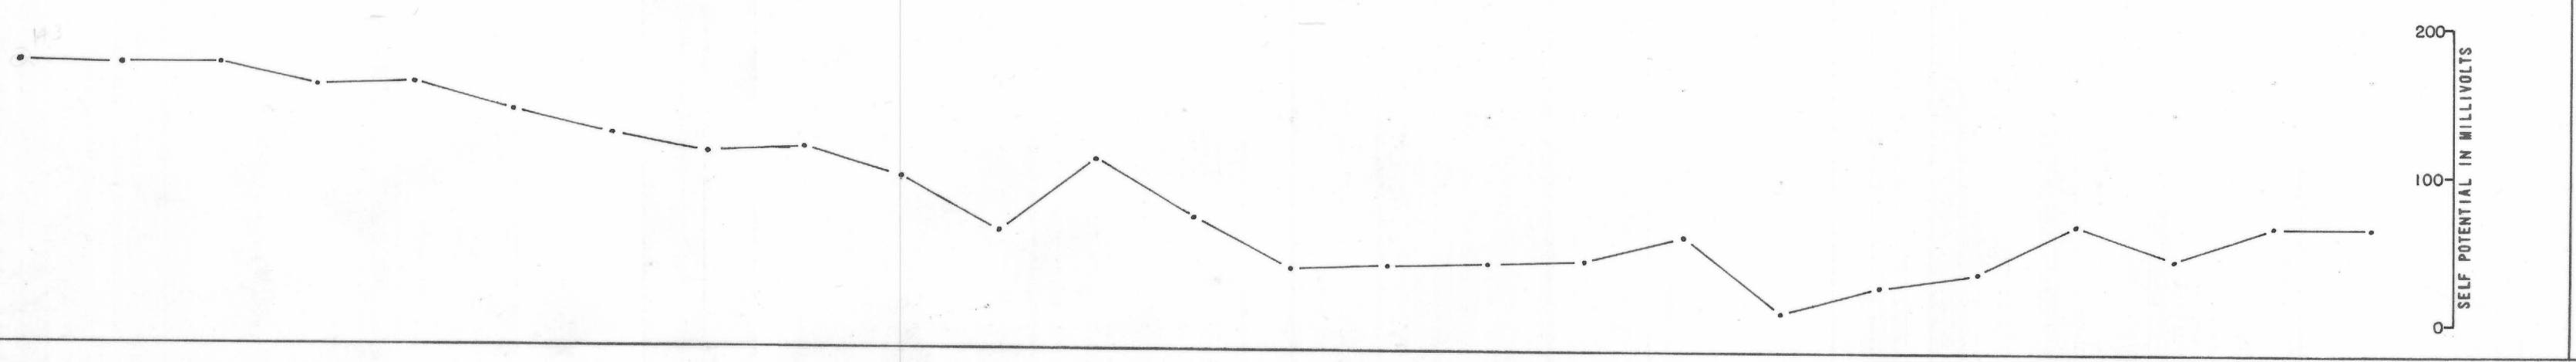

SELF POTENTIAL IN MILLIVOLTS