



CONTACT INFORMATION
Mining Records Curator
Arizona Geological Survey
416 W. Congress St., Suite 100
Tucson, Arizona 85701
602-771-1601
<http://www.azgs.az.gov>
inquiries@azgs.az.gov

The following file is part of the Doug K. Martin Mining Collection

ACCESS STATEMENT

These digitized collections are accessible for purposes of education and research. We have indicated what we know about copyright and rights of privacy, publicity, or trademark. Due to the nature of archival collections, we are not always able to identify this information. We are eager to hear from any rights owners, so that we may obtain accurate information. Upon request, we will remove material from public view while we address a rights issue.

CONSTRAINTS STATEMENT

The Arizona Geological Survey does not claim to control all rights for all materials in its collection. These rights include, but are not limited to: copyright, privacy rights, and cultural protection rights. The User hereby assumes all responsibility for obtaining any rights to use the material in excess of "fair use."

The Survey makes no intellectual property claims to the products created by individual authors in the manuscript collections, except when the author deeded those rights to the Survey or when those authors were employed by the State of Arizona and created intellectual products as a function of their official duties. The Survey does maintain property rights to the physical and digital representations of the works.

QUALITY STATEMENT

The Arizona Geological Survey is not responsible for the accuracy of the records, information, or opinions that may be contained in the files. The Survey collects, catalogs, and archives data on mineral properties regardless of its views of the veracity or accuracy of those data.

(4-683.)

Mineral Survey No. 1164

Lot No. _____

Public Land

The Ellsworth Mining

Dead District.

FIELD NOTES

OF THE SURVEY OF THE MINING CLAIM OF

George F. Hill and Robert F. Buck

Chavis Arizona Territory

KNOWN AS THE

First Chance

Ellsworth #

Mining District,

Yuma

County,

Arizona Ter-

Section _____,

Township _____,

6 N,

Range _____

13 W

Surveyed under instructions dated March 25, 1895,

by R. C. Powers,

U. S. Deputy Mineral Surveyor.

Claim located _____

March 20th

, 1895

Survey commenced _____

Apr 17th

, 1895

Survey completed _____

Apr 19

, 1895

o 6-160

Address of Claimant Chavis Arizona

T. W. Hill

apty of fact

8020 b-3 m

Survey No. 1168
First-Chance Lode

Beginning at Corner No. 1 identical
with corner No. 1 of the location
A stone 24x8x6 ins. set 18 ins. in the
ground, marked $\frac{1}{168}$

whence ^{No. 1168,}
U. S. L. M_n bears N. 29° 45' W. 839 ft. dist.

Shea's Peak bears S. 48° 10' E. 2 $\frac{1}{2}$ mil. dist.

An Ironwood tree 12 ins. diam. at the
ground bears S. 12° 30' W. 132 ft. dist.,
marked B. J. $\frac{1}{168}$

Thence S. 81° 30' E.

300 To Cor. No. 2, ^{Identical with location}
A Oregon Pine post
4x4 ins. square by 5 ft. long set 2 ft.
in the ground, with mound of
stone marked $\frac{2}{168}$

whence
A Palo Verde tree 6 ins. diam. bears
S. 19° 30' E. 36 ft. dist. marked B. J. $\frac{2}{168}$.

Thence N. 8° 30' E.

1290 To Cor. No. 3, ^{Identical with location}
A Oregon Pine post 3x5 ins.
square by 5 ft. long set 2 ft. in the
ground, with mound of stone,
marked $\frac{3}{168}$

whence
An Ironwood tree 6 ins. diam. bears
S. 61° E. 63 ft. dist. ^{mark.} B. J. $\frac{3}{168}$

Thence N. 81° 30' W.

300 To Cor. No. 4, ^{Identical with location}
A slate rock in place
4x6 ft. by 18 ins. high, marked $\frac{4}{168}$
mound of stone on top
whence

Feet- A shaft 5 x 7 ft. and 30 ft. deep bears
S. 2° 45' E. 845 ft. distant.

Bull Peak bears N. 82° 30' W.

Shear's Peak bears S. 41° 31' E.

Thence N. 81° 30' W.

Va. 13° 46' E.

300

To Cor. No. 5, ^{identical with location} an Oregon pine post
4 x 4 ins. x 5 ft. long, ^{set 2 ft. in the ground,} marked T 68 and sur-
rounded by a mound of stone
whence

An Iron wood tree 6 ins. diam. bears
S. W. 11 ft. dist. marked T. J. T 68

Thence S. 8° 30' W.

Va. 13° 46' E.

1290

To Cor. No. 6, ^{identical with location} an Oregon pine post
4 x 4 ins. x 5 ft. long, ^{set 2 ft. in the ground,} marked T 68 and
surrounded by a mound of stone.
No bearing tree or rock in sight

Thence S. 81° 30' E.

Va. 13° 46' E.

300

To T 68 Place of beginning

Improvements

From No. T 68 N. Center end Monument
a shaft 5 x 7 ft. and 30 ft. deep bears
S. 2° 45' E. 845 ft. distant

Value \$ 350.00

At a depth of 30 ft. in this shaft, leads
5 x 6 ft. and 40 ft. in length have
been run bearing N. and S.

Value \$ 400.00

An open cut 10 ft. wide by 50 ft. long and
6 ft. deep has been run E. and W. from the shaft.

Value \$ 300.00

The First-Chance 10 x 12 ft. Cabin bears S. 11° W.
838 ft. distant

Value \$ 50.00

Total Value \$ 1100.00

4-688

MINERAL SURVEY No. 4134

Arizona Land District

FIELD NOTES

OF THE SURVEY OF THE MINING CLAIM OF

Britannia Gold Mines, Inc.

KNOWN AS THE

Black Cat, Black Cat Nos. 1, 2, 3, 4, 5, 6, 7, and 8 lodes,

Ellsworth Mining District,

Yuma County, Arizona

Section^s 25 and 26 (Uns) Township 5 North, Range 14 West, G&SRB&M.

Surveyed under instructions dated June 19th., 1930

By Harry E. Jones,
U. S. Mineral Surveyor.

Claim located See location notices, 19

Survey commenced June 20th., 1930.

Survey completed June 30th., 1930.

Address of claimant R. G. Langmade, Att'y.
416 Luhrs Bldg. Phoenix, Arizona.

DATES OF AMENDED LOCATIONS

~~See location notices attached.~~

Feet

MINERAL SURVEY NO. 4134

Black Cat Lode

Beginning at Cor. No. 1, identical with the loc^{ation} mon^{ument} and Cor. 2 Black Cat No. 4, Cor. 4 Black Cat No. 8, and Cor. 3 Black Cat No. 7 lodes of this survey, a 3 ft. $\frac{3}{4}$ in. pipe with a 2 in. brass cap marked U.S. MINERAL SURVEY NO. 4134; 1-BC; 2-BCNo. 4; 4-BCNo. 8; 3-BCNo. 7; set 20 ins. in ground and surrounded with a substantial mound of earth and rock. The corner common to Sections 23, 24, 25 and 26, T. 5 N. R. 14 W. bears N. 25° 35' 40" E. 2550.67 ft. No other suitable bearings available.

Thence S. 57° 30' W.

Along line 3-2 Black Cat No. 7 lode of this survey.

- 10.00 Cross center of road bearing NWly. and SEly.
- 200.00 Cross center of 5 ft. wash, course SEly.
- 300.00 To Southeast End Center, identical with loc. mon. and Northwest End Center Black Cat No. 7 lode of this survey, a 3 ft. $\frac{3}{4}$ in. pipe with a 2 in. brass cap marked U.S. MINERAL SURVEY NO. 4134; SEECBC; NWECCBCNo. 7; set 18 ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.
- 600.00 To Cor. No. 2, identical with loc. mon. and Cor. 2 Black Cat No. 7, Cor. 3 Black Cat No. 6 and Cor. 4 Black Cat No. 2 lodes of this survey, a 3 ft. $\frac{3}{4}$ in. pipe with a 2 in. brass cap marked U.S. MINERAL SURVEY NO. 4134; 2-BC; 2-BCNo. 7; 3-BCNo. 6; 4-BCNo. 2; set 18 ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

Thence N. 52° 30' W.

Along line 4-3 Black Cat No. 2 lode of this survey.

- 480.00 Cross center of 5 ft. wash, course Sly.
- 1335.00 Cross center of 5 ft. wash, course Wly.
- 1500.00 To Cor. No. 3, identical with loc. mon. and Cor. 3 Black Cat No. 2, Cor. 4 Black Cat No. 3, and Cor. 2 Black Cat No. 1 lodes, all of this survey, a 3 ft. $\frac{3}{4}$ in. pipe with a 2 in. brass cap marked U.S. MINERAL SURVEY NO. 4134; 3-BC;

3-BCNo.2; 4-BCNo.3; 2-BCNo.1; set 20ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

Thence N. 37° 30' E.

Along line 2-1 Black Cat No.1 lode of this survey.

500.00 To Northwest End Center, identical with loc. mon. and Southeast End Center Black Cat No.1 lode of this survey, a 3ft. $\frac{1}{2}$ in pipe with a 2in. brass cap marked U.S.MINERAL SURVEY NO.4134; NWEBC; SEECBCNo.1; set 20ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

600.00 To Cor. No. 4, identical with loc. mon. and Cor.1 Black Cat No. 1, Cor. 2 Black Cat No. 5, and Cor. 3 Black Cat No. 4 lodes all of this survey, a 3 ft. $\frac{1}{2}$ in. pipe with a 2in. brass cap marked U.S.MINERAL SURVEY NO.4134; 4-BC; 1-BCNo.1; 2-BCNo.5; 3-BCNo.4; set 18 ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

Thence S. 52° 30' E.

Along line 3-2 Black Cat No. 4 lode of this survey.

1465.00 Cross road center, bearing NWly. and SEly.

1500.00 To Cor. No. 1 the place of beginning.

Black Cat No. 1 Lode

Beginning at Cor. No. 1, identical with the loc. mon. and Cor. 2 Black Cat No. 5, Cor. 3 Black Cat No. 4, and Cor.4 Black Cat lodes all of this survey, previously described. The corner common to Sections 23, 24, 25 and 26, T. 5 N. R. 14 W. bears N.57°12'35"E. 2630.00 ft. No other suitable bearings available.

Thence S. 37° 30' W.

Along line 4-3 Black Cat lode of this survey.

300.00 To Southeast End Center, identical with loc. mon. and Northwest End Center Black Cat lode, this survey, previously described.

600.00 To Cor. No. 2, identical with loc. mon. and Cor.3 Black

Cat, Cor.3 Black Cat No. 2, and Cor. 4 Black Cat No. 3 lodes all of this survey, previously described.

Thence N. 52° 30' W.

Along line 4-3 Black Cat No. 3 lode of this survey.

570.00 Cross center of road bearing Ely. and Wly.

930.00 Cross center of 10 ft. wash, course SWly.

1500.00 To Cor. No. 3, identical with loc. mon. and Cor. 3 Black Cat No.3 lode of this survey, and on the SE. side line of Benson No.10 lode uns. a 3ft. 1/4 in. pipe with a 2in. brass cap marked U.S.MINERAL SURVEY NO.4134; 3-BCNO.1; 3-BCNo.3; set 20ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

Thence N. 37° 30' E.

Along the SE. side line of Benson No. 10 lode, uns.

300.00 To Northwest End Center, identical with loc. mon. a 3ft. 1/4 in. pipe with a 2in. brass cap marked U.S.MINERAL SURVEY NO.4134- NWEBCBCNo.1; set 18ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

600.00 To Cor. No. 4, identical with loc. mon. and Cor. 3 Black Cat No. 5 lode of this survey, a 2 ft. 1/4 in. pipe with a 2in. brass cap marked U.S.MINERAL SURVEY NO.4134; 4-BCNo.1; 3-BCNo.5; set 6ins. in rock in place and surrounded with a substantial mound of earth and rock. No suitable bearings available.

Thence S. 52° 30' E.

Along line 3-2 Black Cat No. 5 lode of this survey.

520.00 Cross center of 5 ft. wash, course SWly.

1410.00 Cross center of 5 ft. wash, course Wly.

1500.00 To Cor. No. 1 the place of beginning.

Black Cat No. 2 Lode

Beginning at Cor. No. 1, identical with the loc. mon. and Cor. 2 Black Cat No. 6 lode of this survey, on NE. end line Benson No.16 lode uns. a 3ft. 1/4 in. pipe with a 2in. brass cap marked U.S.MINERAL SURVEY NO.4134; 1-BCNo.2;

2-BCNo.6; set 20ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available. The $\frac{1}{4}$ corner common to Sections 26 and 35, T. 5 N. R. 14 W. bears S. 24° 06' 20" W. 2185.13 ft. No other suitable bearings available. Thence N. 52° 30' W. 2185.13 ft.

Along the NE. end line Benson No. 16 lode, uns. 90.00 Cross center of 5 ft. wash, course SEly.

150.00 Intersect NE. corner Benson No. 16 lode, identical with SE. corner Benson No. 15 lode, both uns.

Along NE. end line Benson No. 15 lode, uns. 750.00 Intersect NE. corner Benson No. 15 lode, identical with SE. corner Benson No. 14 lode, both uns.

Along NE. end line Benson No. 14 lode, uns. 1350.00 Intersect NE. corner Benson No. 14 lode, identical with SE. corner Benson No. 13 lode, both uns.

Along NE. end line Benson No. 13 lode, uns. 1500.00 To Cor. No. 2, identical with loc. mon. and Cor. 1 Black Cat No. 3 lode of this survey, a 3 ft. $\frac{1}{2}$ in. pipe with a 2 in. brass cap marked U.S. MINERAL SURVEY NO. 4134; 2-BCNo. 2; 1-BCNo. 3; set 15 ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available. Thence N. 37° 30' E.

Along line 1-4 Black Cat No. 3 lode, this survey. 300.00 To Northwest End Center, identical with loc. mon. and Southeast End Center Black Cat No. 3 lode this survey, a 3 ft. $\frac{1}{2}$ in. pipe with a 2 in. brass cap marked U.S. MINERAL SURVEY NO. 4134; NWEBCNo. 2; SEECBCNo. 3; set 18 ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

510.00 Cross center of 5 ft. wash, course Wly.

600.00 To Cor. No. 3, identical with loc. mon. and Cor. 4 Black Cat No. 3, Cor. 2 Black Cat No. 1 and Cor. 3 Black Cat lodes, all of this survey, previously described. Thence S. 52° 30' E.

Along line 3-2 Black Cat lode, of this survey.

165.00 Cross center of 5 ft. wash, course Wly.

1020.00 Cross center of 5 ft. wash, course Sly.

1500.00 To Cor. No. 4, identical with loc. mon. and Cor. 2 Black Cat, Cor. 2 Black Cat No. 7 and Cor. 3 Black Cat No. 6 lodes all of this survey, previously described.

Thence S. 37° 30' W.

Along line 3-2 Black Cat No. 6 lode of this survey.

300.00 To Southeast End Center, identical with loc. mon. and Northwest End Center Black Cat No. 6 lode of this survey, a 3 ft. $\frac{3}{4}$ in. pipe with a 2 in. brass cap marked U.S. MINERAL SURVEY NO. 4134; SEECBC No. 2; NNECBC No. 6; set 20 ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

600.00 To Cor. No. 1 the place of beginning.

Black Cat No. 3 Lode

Beginning at Cor. No. 1, identical with the loc. mon. and Cor. 2 Black Cat No. 2 lode of this survey, previously described, on NE. end line Benson No. 13 lode, uns.

The $\frac{1}{4}$ corner common to Sections 26 and 35, T. 5 N. R. 14 W. bears S. 5° 50' 40" E. 2922.92 ft. No other suitable bearings available.

Thence N. 52° 30' W.

Along NE. end line Benson No. 13 lode, uns.

450.00 Intersect NE. corner Benson No. 13 lode, identical with SE. corner Benson No. 12 lode, both uns.

1015.00 Cross center of road bearing NEly. and SWly.

1050.00 Intersect NE. corner Benson No. 12 lode, identical with SE. corner Benson No. 11 lode, both uns.

Along NE. end line Benson No. 11 lode, uns.

1100.00 Cross center 10 ft. wash, course SWly.

1500.00 To Cor. No. 2, identical with loc. mon. and SW. corner Benson No. 10 lode uns. a 3 ft. $\frac{3}{4}$ in. pipe with a 2 in. brass cap marked U.S. MINERAL SURVEY NO. 4134- B-BC No. 3; set 20 ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

Thence N. 37° 30' E.

- Along SE. side line Benson No. 10 lode, uns.
- 300.00 To Northwest End Center, identical with loc. mon. a 3ft. $\frac{1}{2}$ in. pipe with a 2in. brass cap marked U.S. MINERAL SURVEY NO. 4134; NWEBC No. 3; set 20ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.
- 600.00 To Cor. No. 3, identical with loc. mon. and Cor. 3 Black Cat No. 1 lode of this survey, previously described.
Thence S. 52° 30' E.
- Along line 3-2 Black Cat No. 1 lode of this survey.
- 570.00 Cross center of 10 ft. wash, course SWly.
- 930.00 Cross center of road, bearing Ely. and Wly.
- 1500.00 To Cor. No. 4, identical with loc. mon. and Cor. 2 Black Cat No. 1, Cor. 3 Black Cat and Cor. 3 Black Cat No. 2 lodes, all of this survey, previously described.
Thence S. 37° 30' W.
- Along line 3-2 Black Cat No. 2 lode of this survey.
- 90.00 Cross center of 5 ft. wash, course Wly.
- 300.00 To Southeast End Center, identical with loc. mon. and Northwest End Center Black Cat No. 2 lode of this survey previously described:
- 600.00 To Cor. No. 1 the place of beginning.
- Black Cat No. 4 Lode
- Beginning at Cor. No. 1, identical with loc. mon. and Cor. 1 Black Cat No. 8 lode of this survey, a 3 ft. $\frac{1}{2}$ in. pipe with a 2in. brass cap marked U.S. MINERAL SURVEY NO. 4134; 1-BC No. 4; 1-BC No. 8; set 18ins. in ground and surrounded with a substantial mound of earth and rock.
- The corner common to Sections 23, 24, 25 and 26, T. 5 N. R. 14 W. bears N. 19° 24' 15" E. 29731.51 ft. No other suitable bearings available.
- Thence S. 37° 30' W.
- Along line 1-4 Black Cat No. 8 lode of this survey.
- 300.00 To Southeast End Center, identical with loc. mon. and Northwest End Center Black Cat No. 8 lode of this survey a 3ft. $\frac{1}{2}$ in. pipe with a 2in. brass cap marked U.S. MINERAL

Thence S. 57° 30' W. 114.00 YSVHUS

Along line 4-5 Black Cat No. 4 lode of this survey.

300.00 To Southeast End Center, identical with loc. mon. and Northwest End Center Black Cat No. 4 lode this survey, previously described.

485.00 Cross center of 5 ft. wash, course Wly.

600.00 To Cor. No. 2, identical with loc. mon. and Cor. 3 Black Cat No. 4, Cor. 4, Black Cat, and Cor. 1 Black Cat No. 1 lodes all of this survey, previously described.

Thence N. 52° 30' W.

Along line 1-4 Black Cat No. 1 lode of this survey.

90.00 Cross center of 5 ft. wash, course Wly.

980.00 Cross center of 5 ft. wash, course SWly.

1500.00 To Cor. No. 2, identical with loc. mon. and Cor. 4 Black Cat No. 1 lode of this survey, previously described.

Thence N. 37° 30' E.

Along SE. side line Benson No. 10 lode, uns.

300.00 To Northwest End Center, identical with loc. mon. and SE. corner Benson No. 10 lode uns. a 3 ft. 2in. pipe with a 2in. brass cap marked U.S. MINERAL SURVEY NO. 4134; NWEBC No. 5 set 18ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

600.00 To Cor. No. 4, identical with loc. mon. a 3ft. 2in. pipe with a 2in. brass cap marked U.S. MINERAL SURVEY NO. 4134; 4-BC No. 5; set 16ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

Thence S. 52° 30' E.

1500.00 To Cor. No. 1 the place of beginning.

Black Cat No. 6 Lode

Beginning at Cor. No. 1, identical with loc. mon. and NW. corner Benson No. 19 lode uns. on NE. end line Benson No. 18 lode uns. a 3ft. 2in. pipe with a 2in. brass cap marked U.S. MINERAL SURVEY NO. 4134; 1-BC No. 6; set 24ins. in ground and surrounded with a substantial mound of earth and rock.

The corner common to Sections 25, 26, 35 and 36, T. 5 N. R. 14 W. bears S. 27° 36' E. 1215.10 ft. No other suitable bearings available.

Thence N. 52° 30' W.

Along NE. side line Benson No. 18 lode, uns.

25.00 Cross center of 10 ft. wash, course Sly.

435.00 Cross center of 5 ft. wash, course Sly.

450.00 Intersect NE. corner Benson No. 18 lode, identical with SE. corner Benson No. 17 lode, both uns.

Along NE. end line Benson No. 17 lode, uns.

1040.00 Cross center of 5 ft. wash, course SEly.

1050.00 Intersect NE. corner Benson No. 17 lode, identical with SE. corner Benson No. 16 lode, both uns.

Along NE. end line Benson No. 16 lode, uns.

1300.00 Cross center of 5 ft. wash, course Ely.

1500.00 To Cor. No. 2, identical with Cor. mon. and Cor. 1 Black Cat No. 2 lode of this survey, previously described.

Thence N. 37° 30' E.

Along line 1-4 Black Cat No. 2 lode of this survey.

300.00 To Northwest End Center, identical with loc. mon. and Southeast End Center Black Cat No. 2 lode of this survey, previously described.

600.00 To Cor. No. 3, identical with loc. mon. and Cor. 4 Black Cat No. 2, Cor. 2 Black Cat and Cor. 2 Black Cat No. 7 lodes, all of this survey, previously described.

Thence S. 52° 30' E.

Along line 2-1 Black Cat No. 7 lode of this survey.

660.00 Cross center of 5 ft. wash, course Sly.

1180.00 Cross center of 10 ft. wash, course Sly.

1420.00 Cross center of 5 ft. wash, course Sly.

1500.00 To Cor. No. 4, identical with loc. mon. and Cor. 1 Black Cat No. 7 lode of this survey, a 3 ft. 2in. pipe with a 2in. brass cap marked U.S. MINERAL SURVEY NO. 4134; 4-BCNo. 6; 1-BCNo. 7; set 22ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

Thence S. 37° 30' W.

Along NW. side line Benson No. 19 lode, uns.

160.00 Cross center of 5 ft. wash, course Sly.

300.00 To Southeast End Center, identical with loc. mon. a 5ft. 2in. pipe with a 2in. brass cap marked U.S. MINERAL SURVEY NO. 4134; SEECB No. 6; set 20 ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

600.00 To Cor. No. 1 the place of beginning:

Black Cat No. 7 lode

Beginning at Cor. No. 1, identical with loc. mon. and Cor. 4, Black Cat No. 6 lode of this survey, previously described. The corner common to Sections 25; 26, 35 and 36, T. 5 N. R. 14 W. bears S. 7° 15' 20" E. 1565.37 ft.

Thence N. 52° 30' W.

Along line 4-3 Black Cat No. 6 lode of this survey.

80.00 Cross center of 5 ft. wash, course Sly.

320.00 Cross center of 10 ft. wash, course Sly.

840.00 Cross center of 5 ft. wash, course Sly.

1500.00 To Cor. No. 2, identical with loc. mon. and Cor. 3 Black Cat No. 6, Cor. 4 Black Cat No. 2 and Cor. 2 Black Cat lodes all of this survey, previously described.

Thence N. 37° 30' E.

Along line 2-1 Black Cat lode of this survey.

300.00 To Northwest End Center; identical with loc. mon. and Southeast End Center Black Cat lode of this survey, previously described.

400.00 Cross center of 5 ft. wash, course SELy.

590.00 Cross center of road bearing NWly. and SELy.

600.00 To Cor. No. 3, identical with loc. mon. and Cor. 1 Black Cat, Cor. 2 Black Cat No. 4 and Cor. 4; Black Cat No. 8 lodes all of this survey, previously described.

Thence S. 52° 30' E.

Along line 4-3 Black Cat No. 8 lode of this survey.

690.00 Cross center of 10 ft. wash, course SELy.

1145.00 Cross center of 5 ft. wash, course Sly.

1500.00 To Cor. No. 4, identical with loc. mon. and Cor. 3 Black Cat No. 8 lode of this survey, on NW. side line Benson No. 19 lode, uns. a 3 ft. $\frac{1}{2}$ in. pipe with a 2 in. brass cap marked U.S. MINERAL SURVEY NO. 4134; 4-BC No. 7; 3-BC No. 8; set 20 ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

Thence S. 37° 30' W.

Along NW. side line Benson No. 19 lode, uns.

207.00 Cross center of road bearing NWly. and SEly.

300.00 To Southeast End Center, identical with loc. mon. a 3 ft.

$\frac{1}{2}$ in. pipe with a 2 in. brass cap marked U.S. MINERAL SURVEY NO. 4134; SEECBC No. 7; set 20 ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

600.00 To Cor. No. 1 the place of beginning.

Black Cat No. 8 Lode

Beginning at Cor. No. 1, identical with loc. mon. and Cor. 1 Black Cat No. 4 lode of this survey, previously described. The corner common to Sections 23, 24, 25 and 26, T. 5 N. R. 14 W. bears N. 19° 24' 15" E. 1973.51 ft.

Thence S. 52° 30' E.

1500.00 To Cor. No. 2, identical with loc. mon. a 3 ft. $\frac{1}{2}$ in. pipe with a 2 in. brass cap marked U.S. MINERAL SURVEY NO. 4134; 2-BC No. 8; set 18 ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available.

Thence S. 57° 30' W.

300.00 To Southeast End Center, identical with loc. mon. a 3 ft.

$\frac{1}{2}$ in. pipe with a 2 in. brass cap marked U.S. MINERAL SURVEY NO. 4134; SEECBC No. 8; set 12 ins. in ground and surrounded with a substantial mound of earth and rock. No suitable bearings available. Also identical with NE. corner Benson No. 19 lode, uns.

Along NW. side line Benson No. 19 lode, uns.

600.00 To Cor. No. 3, identical with loc. mon. and Cor. 4 Black Cat No. 7 lode of this survey previously described.

Thence N. 52° 30' W. 100 ft. to 00.0001

Along line 4-3 Black Cat No. 7 lode of this survey.

355.00 Cross center of 5 ft. wash, course Sly.

810.00 Cross center of 10 ft. wash, course SEly.

1500.00 To Cor. No. 4, identical with loc. mon. and Cor. 3 Black Cat No. 7, Cor. 1 Black Cat, and Cor. 2 Black Cat No. 4 lodes all of this survey, previously described.

Thence N. 37° 30' E. 100 ft.

Along line 2-1 Black Cat No. 4 lode of this survey.

40.00 Cross center of 5 ft. wash, course SEly.

300.00 To Northwest End Center, identical with loc. mon. and Southeast End Center Black Cat No. 4 lode of this survey previously described.

600.00 To Cor. No. 1 the place of beginning.

The mean magnetic variation at all corners is 15° 10' E.

Lode Lines

As near as can be determined from the present developments the lode lines of the several locations embraced in this claim extend as follows from their discovery points:

- Black Cat lode, N. 52° 30' W. 135 ft. and S. 52° 30' E. 1365 ft.
- Black Cat No. 1 lode, N. 52° 30' W. 1400 ft. and S. 52° 30' E. 100 ft.
- Black Cat No. 2 lode, N. 52° 30' W. 50 ft. and S. 52° 30' E. 1450 ft.
- Black Cat No. 3 lode, N. 52° 30' W. 1450 ft. and S. 52° 30' E. 50 ft.
- Black Cat No. 4 lode, N. 52° 30' W. 15 ft. and S. 52° 30' E. 1485 ft.
- Black Cat No. 5 lode, N. 52° 30' W. 1485 ft. and S. 52° 30' E. 15 ft.
- Black Cat No. 6 lode, N. 52° 30' W. 250 ft. and S. 52° 30' E. 1240 ft.
- Black Cat No. 7 lode, N. 52° 30' W. 100 ft. and S. 52° 30' E. 1400 ft.
- Black Cat No. 8 lode, N. 52° 30' W. 50 ft. and S. 52° 30' E. 1450 ft.

Area

- Total area Black Cat lode, 20.661 acres
- Total area Black Cat No. 1 lode, 20.661 "
- Total area Black Cat No. 2 lode, 20.661 "
- Total area Black Cat No. 3 lode, 20.661 "
- Total area Black Cat No. 4 lode, 20.661 "

Total area Black Cat No.5 lode, 20.661 acres
 Total area Black Cat No.6 lode, 20.661 "
 Total area Black Cat No.7 lode, 20.661 "
 Total area Black Cat No.8 lode, 20.661 "

Location

This survey is located in Sections 25 and unshr. 26,
 T. 5 N. R. 14 W. Gila and Salt River Base and Meridian,
 Ellsworth Mining District, Yuma County, Arizona.

EXPENDITURE OF FIVE HUNDRED DOLLARS.

I certify that the value of the labor and improvements
 made upon or for the benefit of the locations embraced
 in said mining claim by the claimant or its grantors is
 not less than Five Hundred Dollars, and that said im-
 provements consist of:

Black Cat Lode

- No.1 Disc. cut 6x14x6 ft. facing Nly. the mouth of which
 bears S.52°30'E. 135 ft. from NW. End Center.
 Value \$ 100.00
- No.2 cut 12x10x4 ft. facing Nly. the mouth of which bears
 S.38°35'E. 137 ft. from NW. End Center.
 Value \$ 100.00
- No.3 cut 8x18x7 ft. facing SWly. the mouth of which bears
 S.57°06'E. 143 ft. from Cor.3. Value \$ 150.00
- No.4 shaft 6x6x8 ft. deep which bears S.40°40'E. 230 ft.
 from Cor.4; Value \$ 100.00
- No.5 cut 13x25x10 ft. facing Nly. tunnel 4x6x20 ft. long
 and shaft 4x6x15 ft. deep in tunnel head; rising to surface,
 which bears S.33°45'E. 228ft. from Cor4 Value \$ 1260.00
- No.6 cut 8x25x12 ft. facing NWly. with shaft 4x6x25 ft.
 deep in head which bears S.28°50'E. 227 ft. from Cor.4
 Value \$ 935.00
- No. 7 cut 10x15x8 ft. facing Wly. with shaft 4x6x60 ft.
 deep in head which bears S.18°20'E. 220 ft. from Cor.4
 Value \$ 1060.00
- No. 8 shaft 4x6x4 ft. deep which bears S.37°30'W. 68 ft.
 from Cor. 4, Value \$ 50.00

Black
 .4
 .VOS
 .003
 ad
 rvey
 .006
 E.
 pments
 this
 65 ft.
 'E.100 f
 .1450 ft
 'E. 50 f
 .1485 ft
 'E. 15 f
 E. 1240
 E.1400 f
 . 1450 f
 acres
 "
 "
 "
 "

An undivided $\frac{1}{9}$ interest in this improvement is accredited to each the Black Cat lode and Black Cat No. 1 lode both of this survey, it being situated on both said lodes. Value $\frac{1}{9}$ interest credited to this lode, \$ 25.00
 An undivided $\frac{1}{9}$ th interest in improvement No. 2 Black Cat No. 1 lode of this survey, hereinafter described is accredited to this lode. Value \$2685.20

Black Cat No. 1 Lode

No. 1 Dics. point an outcropping ledge in place bears N.52°30'W. 100 ft. from SE. End Center.

No. 2 Main Shaft 5.5x14.5x60 ft. deep, timbered, the SE. corner of which bears N.15°24'W. 47.19 ft. from SE. End

Center, Value \$3600.00; this main shaft sets about in the center of an open sidehill cut having a length of 130 ft. anwaverage width of 15 ft. with an average height of face of 10 ft. Value \$5000.00; From the SE. corner of the main shaft an open cut 6x28.05x8 ft. deep bears S.33°02'E.

17.66 ft. the cut bearing S.73°21'E. In this cut at the 19.73 ft. point the W. edge of a shaft 4x6x40 ft. deep, now filled; cut and shaft have a Value of \$1301.20; From cut head point a tunnel bears S.69°27'E. 4x6x488.77 ft. to face, at the 394.37 ft. point in tunnel, a cross-cut bears S.20°33'W. 4x6x56 ft. to face. Value \$ 8171.55

From above mentioned cut head point a tunnel bears N.86°16'E. 4x5x66.56 ft. thence N.88°27'E. 4x5x57.92 ft. thence N.78°47'E. 4x5x26.70 ft. thence S.72°47'E. 4x5x74.77 ft. thence S.51°15'E. 4x5x22.40 ft. thence S.63°26'E. 4x5x30.82 ft. thence S.49°06'E. 4x5x70 ft. to face; from last mentioned point thence N.37°26'E. 4x5x20.10 ft. thence N.14°54'E. 4x5x37 ft. to face. Value \$ 6094.05

This improvement being centrally located in this claim is situated to mining advantage, in that it is being advanced on the main ore outcropping, and while the main shaft bottom is not yet below the surface level of all of the ground of this claim, the said main shaft is contracted to the 300 ft. level which bottom will be well below the surface of the entire claim, and therefore the contention is that all of the present connected workings of this improvement

Covered May 26/08
E.V.

(4-683.)

Mineral Survey No. 1220.

Lot No. _____

Tucson Land District.

FIELD NOTES

OF THE SURVEY OF THE MINING CLAIM OF the

Golden Mound Mining and
Milling Company,

KNOWN AS THE

Golden Mound, Gold Eagle, Ocean Wave,
Cades and Safe Deposit Placer, Mining District,
Ellsworth Mining District, Yuma County.

Section _____, Township 5 N, Range 12 W

Surveyed under instructions dated May 4th, 1896,

by A. G. Howe,
U. S. Deputy Mineral Surveyor.

Golden Mound, Jan 1st/89 Gold Eagle, Jan 1st/89, Ocean Wave Jan 1st/89
Claim located and Safe Deposit Feb 12th, 1895.

Survey commenced May 9th, 1896.

Survey completed May 12th, 1896.

Address of Claimants.

Wm H. Stilwell Atty for.
Golden Mound Mining & Milling Co.
Phoenix.
Arizona

Feet

Survey No 1220.

Safe Deposit Placer Claim.

Beginning at Cor. No. 1.

Identical with N.E. cor of location and on line 2 to 3 of Golden Mound lode of this survey.

A pine post $4\frac{1}{2}$ ft. long 4 ins. sq. set 18 inches in ground to hard cement surrounded by mound of stone 4 ft. at base and $2\frac{1}{2}$ ft. high scribed 1/1220 S.D.From which a well. bears $S66^{\circ}30'W$. 395 ft.U.S.L.M. - 1220. bears $N85^{\circ}17'E$ 2073 ft.

No bearings available.

Thence $N82^{\circ}36'W$ Var $14^{\circ}0'E$

100. Small wash 5 ft. wide drains NW westerly.
 375. Leave mesa and enter Granite wash.
 600. To Cor. No. 2.

A pine post $4\frac{1}{2}$ ft. long 4 ins. sq. set 18 inches in ground surrounded by mound of stone 4 ft. at base, $2\frac{1}{2}$ ft. high. scribed 2/1220 S.D.The old location cor. small mon. of stone, bears $N82^{\circ}36'W$. 157 ft.

No bearings available.

Thence $S14^{\circ}02'W$ Var $14^{\circ}0'E$.

Down Granite wash.

911. To Cor. No. 3.

Identical with old location cor.

A pine post $4\frac{1}{2}$ ft. long 4 ins. sq. set 18 ins in ground surrounded by mound of stone 4 ft. at base and $2\frac{1}{2}$ ft. high

F feet.

Scribed 3/1220. S.D.
No bearings available.

Thence $S82^{\circ}36' E$

$N01^{\circ}14'0'' E$

200. Leave wash drains southerly to mesa.

600. To Cor. No. 4.

Identical with S.E. cor. of location, which is also the S.W. cor. of the Golden Mound Lode claim No. 2.

Apine post $4\frac{1}{2}$ ft. long 4 ins. sq. set 12 ins to hard ground by the side of post No. 2. 1220 G.M. in monument of stone 4 ft. at base and 3 ft. high. Scribed 4/1220. S.D.

No bearings available.

Thence $N14^{\circ}02' E$

$N01^{\circ}14'0'' E$

Over Rolling mesa.

886 Small wash 5 ft. wide drains NW westerly.

911. To Cor. No. 1. The place of beginning.

Area.

Total area Safe Deposit Placer Claims.

12,465 Acres

Golden Mound Lode Claim.

Beginning at Cor. No. 1.

Identical with Cor. No. 1. of the location Apine post 4 ft. long 4 ins. sq. $1\frac{1}{2}$ ft. in ground surrounded by monument of stone 4 ft. at base $2\frac{1}{2}$ ft. high Scribed 1/1220 G.M.

From which U.S.L.M. 1220 bears $N61^{\circ}32' E$

2263 ft. The Smoke Stack upon Mill.

bears $N66^{\circ}7' E$ 323 ft.

No bearings available.

Feet

The location monument of stone of the "Judiana O Flanigan" bears South, 10ft. distant.

Thence $N 86^{\circ} 7' W$
Var $14^{\circ} 0' E$

300, To cor No. 2.

Identical with location cor. and also cor. No. 4. Safe Deposit Placer claim of this survey.

A pine post $4\frac{1}{2}$ ft. long 4 ins. sq. set 12 ins. to hard ground by side of post 4/1220, S.D. in monument of stone 4 ft. at base and 3 ft. high, scribed 2/1220 G.M. No bearings available.

Thence $N 14^{\circ} 02' E$
Var $14^{\circ} 0' E$

Over Rolling mesa.

886. Small wash 5 ft. wide drains N, Westerly.

911 Cor. No. 1. Safe Deposit Placer claim of this survey and ascend.

1501.4 Cor No. 3.

A pine post $4\frac{1}{2}$ ft. long 4 ins. sq. 18 ins. in ground surrounded by monument of stone $4\frac{1}{2}$ ft. at base 3 ft. high, scribed 3/1220 G.M.

The old location, a small mon. of stone, bears $N 14^{\circ} 02' E$ 35.5 ft. distant. No bearings available.

Thence $S 86^{\circ} 7' E$
Var $14^{\circ} 0' E$

587. Cor. No. 4. Along southerly slope of hill near top

Identical with cor No 3 Gold Eagle lode claim of this survey.

A pine post 4 ft. long 4 ins. sq. 6 ins

Feet.

in ground to rock. Surrounded by
 monument of stone 4 1/2 ft. at base
 2 1/2 ft. high scribed 4/1220 G.M.
 From which old original location
 cor. a small mon. of stone, bears
 N 13° 44' E 145. ft.
 No bearings available.

Thence S 13° 44' W.
 Var 14° 0' E

Over undulating or rolling ground
 1500, Cor. No 5.

Identical with location and cor. No. 2. of the
 Gold Eagle Lode Claim of this survey
 A pine post 4 1/2 ft. long 4 ins. sq. 12 ins.
 to hard ground in monument
 of stone 4 1/2 ft. at base 2 1/2 ft. high.
 Scribed 5/1220. G.M. From which
 Smoke stack of Mill bears due North
 150 ft. distant.
 No bearings available.

Thence N 86° 7' W
 Var 14° 0' E

295 To Cor. No 1. The place of beginning.

Gold Eagle Lode Claim.
 Beginning at Cor. No. 1.
 Identical with cor No 1. of location.
 A pine post 4 ft. long 4 ins sq 18 ins
 in ground in monument of
 stone 4 ft. at base 2 1/2 ft. high scribed
 1/1220 G.E.
 From which U.S.L.M - 1220 bears
 N 52° 55' E 1747 ft.
 No bearings available.

Feet.

Thence $S 81^{\circ} 28' W$
Var $14^{\circ} 0' E$

300. Cor. No. 2.

Identical with cor. No. 2 of location which is also cor. No. 5. of Golden Mound Lode of this Survey.

A pine post 4 ft. long, 4 ins. sq. ^{set} 12 ins. to hard ground by the side of post 5/1220 G.M. in monument of stone 4 1/2 ft. at base 2 1/2 ft. high, scribed 2/1220 G.E.

From which the smoke stack of mill bears due North 150 ft. distant.

No bearings available.

Thence $N 13^{\circ} 44' E$

Var $14^{\circ} 0' E$

Over undulating or Rolling Ground

1500. Cor. No. 3.

Identical with cor. No. 4. Golden Mound Lode of this Survey. A pine post 4 ft. long 4 ins. sq. 6 ins. in ground to ^{by side of post 4} rock, surrounded by monument of stone 4 1/2 ft. at base 2 1/2 ft. high, scribed 3/1220 G.E on east side of post No 4/1220 G.M.

From which the old location cor. a small mon, of stone bears $N 13^{\circ} 44' E$ 145 ft

No bearings available.

Thence $N 81^{\circ} 28' E$

Var $14^{\circ} 0' E$

Along southerly crest of hill.

550. Intersect line 4.5 Ocean Wave lode of this Survey $S 13^{\circ} 30' W$ 510 ft. from cor. No. 5.

595 Cor. No. 4.

Identical with location cor. A pine post 4 ft. long 4 ins. sq. Set 6 ins. in

Fruit

ground to rock in monument of
stone $4\frac{1}{2}$ ft. at base $2\frac{1}{2}$ ft. high. scribed
4/1220 G.E.

No bearings available.

Thence $S 13^{\circ} 33' W$

Var $14^{\circ} 0' E$

Over rolling ground gradually as-
cending

590. Saddle between hills, N.E. & S.W. and descend

978. Intersect line 3, 4 Ocean Wave lode
of this survey $N 82^{\circ} 44' E$ 43 ft. from cor
No. 4.

1498, 08 Cor. No. 5.

A pine post $4\frac{1}{2}$ ft. long 4 ins. sq. set 18 ins
in ground in monument of stone
 $4\frac{1}{2}$ ft. at base $2\frac{1}{2}$ ft. high. scribed 5/1220
G.E.

From which original location cor.
a small mon. of stone bears
 $N 81^{\circ} 28' E$ 57 ft.

No bearings available.

Thence $S 81^{\circ} 28' W$

Var $14^{\circ} 0' E$

300. To Cor. No. 1. The place of beginning.

Ocean Wave lode.

Beginning at cor. No. 1.

Identical with cor. No. 1. of location
A pine post $4\frac{1}{2}$ ft. long 4 ins. sq. 18 ins
in ground, in monument of stone
4 ft. at base, $2\frac{1}{2}$ ft high scribed 1/1220.

O.W. located on northerly slope of hill.
From which U.S.L.M. -1220 bears
 $S 21^{\circ} 33' E$ 1050 ft.

No bearings available.

Feet

Thence $N 82^{\circ} 44' E$ Var $14^{\circ} 0' E$

Along northerly slope of hill

300. To Cor. No. 2.

Identical with Cor. No. 2 of location
 Apine post $4\frac{1}{2}$ ft. long 4 ins. sq. 18 ins.
 in ground in monument of stone
 $4\frac{1}{2}$ ft. at base $2\frac{1}{2}$ ft. high scribed $2/1220$
 O.W.

No bearings available.

Thence $S 13^{\circ} 20' W$ Var $14^{\circ} 0' E$

Over Rolling ground

1498.6 To Cor. No. 3.

Apine post $4\frac{1}{2}$ ft. long 4 ins. sq. Set 12
 ins to hard ground, in monument
 of stone $4\frac{1}{2}$ ft. at base $2\frac{1}{2}$ ft. high. Scribed
 $3/1220$. O.W.

From which original cor. a small
 monument of stone bears $S 13^{\circ} 20' W$
 169 ft.

No bearings available.

Thence $S 82^{\circ} 44' W$ Var $14^{\circ} 0' E$

Along southerly slope of Rolling hill.

557. Intersect line 4.5 Gold Eagle Lode
 $N 13^{\circ} 33' E$ 520 ft. from cor. No. 5.

600. To Cor. No. 4

Apine post $4\frac{1}{2}$ ft. long 4 ins. sq. 18 ins.
 in ground in monument of stone
 $4\frac{1}{2}$ ft. at base $2\frac{1}{2}$ ft. high. Scribed $4/1220$
 O.W.

From which old location cor. a
 small monument of stone bears
 $S 13^{\circ} 30' W$ 171 ft.

No bearings available.

Feet.

Thence $N 13^{\circ} 30' E$ Var. $14^{\circ} 0' E$

Ascending southerly slope between hills

400. To divide in saddle bet. hills N.E. & S.W. and gradually descend rolling ground.

9~~0~~⁹0. Intersect line 3.4. Gold Eagle Lode of this survey $S 81^{\circ} 28' W$ 45. ft. from Cor. No. 4.

1500. To Cor. No. 5.

Identical with cor. No. 5. of location
A pine post 4 ft. long 4 ins. sq. 6 ins.
in ground to rock. in monument
ent of stone 4 ft. at base 2 ft. high
scribed 5/1220. O.W.

No bearings available.

Thence $N 82^{\circ} 44' E$ Var. $14^{\circ} 0' E$

296.7 To Cor. No. 1. the place of beginning

Area.

Total Area of Golden Mound Lode
Claim 20.051 Acres

Total Area Gold Eagle Lode Claims.
19.02 Acres.

Total Area Ocean Wave Lode Claims.
19.182 Acres

Less Area in conflict with the
Gold Eagle lode of this Survey.
863 Acres

Net Area Ocean Wave Lode 18.319 Acres.

Net Area Ocean Wave Lode 18.319 Acres

" " Golden Mound Lode 20.051 ..

" " Gold Eagle Lode 19.020

Net Area of Lode Claims. 57.390 Acres.

Location.

This claim is located about twelve miles westerly from Harrisburg on the southerly slope of what is known as the Granite Wash Range of mountains in the northerly center of Yuma County, Ellsworth Mining District. And easterly from a wash that rises north of Sitting Bull Peak, drains south westerly and empties upon Ranegras Plain, upon unsurveyed ground.

SURVEY No 1220,
TUCSON LAND DISTRICT
SURVEYED MAY 9-12-1896.

by H. G. Howe.

U. S. Deputy Min Surveyor.

Scale 400 ft. = 1 inch.



11-6-1919 Copied ARC

4-683

MINERAL SURVEY No. 3587.

Arizona Land District.

FIELD NOTES

OF THE SURVEY OF THE MINING CLAIM OF

The Glenoro Mining Company

KNOWN AS THE

Rose, Lily, Desert Glen and Desert Glen Extension lodes

Ellsworth Mining District,

Yuma, County, Arizona.

Sections 23 & 26, Unsur, & 24 & 25, Township 5 North, Range 14 West

Surveyed under instructions dated May 19th, 1919

by J. P. Goodman U. S. Mineral Surveyor.

Claim located See Location Notices, 19

Survey commenced June 8th, 1919

Survey completed June 12th, 1919

Address of claimant's Atty. A. S. Frost, 613 Kittredge Bldg., Denver, Colo.

DATES OF AMENDED LOCATIONS.

MINERAL SURVEY No. 3587.

Lily Lode.

Beginning at Cor. No. 1. Identical with location
a granite stone 6 X 7 X 24 ins. set 12 ins. in the
ground with mound of stones. Chiseled x 1-L 3587.
Thence Cor. to secs. 23, 24, 25 and 26, Tp. 5 N. R. 14 W.
bears S29°03'W 264.10 ft.

x BR 1-L 3587, chiseled on granite rock in place
brs S.29°40'W 10.65 ft.

No other bearings available.

Location cor. mound of stone 2 X 2ft.

-----o-----

Feet. Thence N.89°56' W. Va. 14°15'E.
128.31 Intersect line between secs. 23 and 24, Tp. 5N R14W,
at N.0°01'W 231.02ft from the sec. cor. and S.0°01'E
2408.98ft from $\frac{1}{2}$ cor.
300.00 To S. Center end, identical with the location
mound of stone 2 X 2ft.
555.00 to Cor. No. 2 identical with location, and with Cor.
No. 1 Desert Glen Lode and Cor. No. 3 Desert Glen
Extension Lode of this Survey.
A granite stone 6 x 6 x 24ins. set 12ins. in the
ground with mound of stone, chiseled $\frac{1}{2}$ -L. 1-D.G. 3 D
G. 3587. No bearings available.
Location Cor. mound of stone 2 X 2ft.

-----o-----

Thence N.0°04'E. Va. 14°15'E
75.0 Cross wash 6ft wide , course N.80°E.
1021.0 Cross road, course E & W.
1221.0 Cross wash, 12ft wide, course N.45°E.
1500.0 To cor. No. 3 Identical with location, and with Cor. No
4 Desert Glen Lode of this survey.
A granite stone 5 x 8 x 24ins. set 12ins in the ground
with mound of stone, chiseled x 3-L 4-D.G. 3587.
No bearings available. Location Cor. mound of stone
2 X 2ft.

Survey No.3587.

Lily Lode Continued.

-----o-----

Thence S.89°56'E. Va.14°15'E.

- 255.0 To N.Center End, identical with Location, mound of stone
2 x 2ft.
- 424.52 Intersect line between secs.23 & 24, Tp.5N R14W, at
N.0°01'W 1731.02ft from Sec cor. and S.0°01'E 908.98ft
from $\frac{1}{2}$ cor.
- 555.00 To cor.No.4 identical with Location, a porphyry 6x10x24ins
set 12ins in the ground, with mound of stone, chiseled
x 4-L 3587. No bearing available.
Location cor.mound of stone 2x 2ft.

-----o-----

Thence S0°04'W. Va.14°15'E.

- 560.0 Cross wash, 15ft wide, course East.
- 650.0 Cross road, course east and west.
- 1029.0 Cross wash, 8ft wide, course east.
- 1500.00 To cor.No.1, place of beginning.

-----o-----

Desert Glen Lode.

Beginning at Cor.No.1. identical with the Location
and cor.No.2 Lily and cor.No.3 Desert Glen Extension
Lodes of this survey, hereinbefore described.

Thence cor.to secs.23,24,25 and 26, Tp.5N R14W brs.
S.61°31'E 485.53ft. No other bearings available.

Thence N.89°56'W. Va.14°15'E.

- 57.0 Cross wash, 5ft wide, course N65°E.
- 300.0 To S.Center end, identical with location, and with the
N.Center end of Desert Glen Extension Lode of this
survey. Mound of stone 2x2ft.
- 600.0 To cor.No.2 identical with Location and with Cor.No.1
Rose and No.4 of Desert Glen Extension Lodes of this
Survey.
x 2-D.G. 1-R, 4D.G.E.3587, chiseled on granite rock in
place 3 x 3 x 1ft above ground. No bearings available.

Survey No. 3587.

Desert Glen Lode Continued.

Location cor. mound of stone 2x2ft.

-----O-----

Thence N.0°04'E. Va.14°15'E.

- 150.0 Cross wash 7ft wide, course N.15°E.
 1290.0 Cross road, course N.70°W & S 70°E.
 1500.0 To cor. No. 3 identical with location and with Cor. No. 4 of Rose Lode of this survey.
 x 3-D.G. 4-R. 3587 chiseled on granite rock in place
 7x3x4ft high, whence x B.R. 3-D.G. 4-R 3587 chiseled on granite rock in place brs N.15°24'W 16.60ft.

-----O-----

Thence S.89°56'E. Va.14°15'E.

- 275.0 Cross wash, 10ft wide, course N.70°E.
 300.0 To E. Center end identical with location, mound of stone 2x2ft,
 600.00 To cor. No. 4 identical with location, and cor. No. 3 of Lily Lode of this survey, hereinbefore described.

-----O-----

Thence S.0°04'7. Va.14°15'E.

- 279.0 Cross wash, 12ft wide, course N.45°E.
 479.0 Cross road, course E. & W.
 1425.0 Cross wash, 6ft wide, course N.80°E
 1500.00 To Cor. No. 1, place of beginning.

-----O-----

Rose Lode.

Beginning at Cor. No. 1, identical with location, and Cor. No. 2 Desert Glen, and Cor. No. 4 Desert Glen Extension Lodes of this survey, hereinbefore described.

Thence Cor. to secs 23, 24, 25 and 26, Tp. 5N R14W.
 brs. S.77°15'E 1052.72ft.

No other bearings available.

Survey, No. 3587.

Rose Lode Continued.

Thence N. 89° 56' W. Va. 14° 15' E.

- 50.0 Cross wash, 6ft wide, course North.
- 200.0 To S. center end, identical with location, mound of stone 2x2ft.
- 500.00 To cor. No. 2, identical with location,
A granite stone 6x8x24ins set 12ins in the ground, with mound of stone, chiseled x 2-R 3587,
No bearings available.
Location cor. mound of stone 2x2ft.

-----o-----

Thence N. 0° 04' E. Va. 14° 15' E.

- 1410.0 Cross wash, 5ft wide, course N. 15° E.
- 1475.0 Cross wash, 10ft wide, course East.
- 1500.0 To cor. No. 3, identical with location, a porphyry 6x7x24ins. set 12ins in the ground, with mound of stone chiseled x 3-R 3587.
No bearings available.
Location cor. 2x2ft.

-----o-----

Thence S. 89° 56' E. Va. 14° 15' E.

- 120.0 Cross wash, 12ft wide, course N. 80° E.
- 220.0 Cross road, course N. 50° W & S. 50° E
270. " gulch, course northerly.
- 300.0 To N. center end, identical with location, mound of stone 2x2ft.
- 500.0 To cor. No. 4. Identical with location and with cor. No. 3 of Desert Glen Lode of this survey. Hereinbefore described.

-----o-----

Thence S. 0° 04' W. Va. 14° 15' E.

- 210.0 Cross road, course N. 70° W & S 70° E.
- 1350.0 Cross wash, 7ft wide, course N. 15° E.
- 1500.0 To cor. No. 1, place of beginning.

-----o-----

Desert Glen Extension Lode.

Beginning at Cor. No. 1, identical with location,

5.

Survey No. 3587.

Desert Glen Extension Lode Continued.

A granite stone 6x8x24ins set 12ins in the ground
with mound of stone, chiseled x 1-D.G.E 3587

Thence cor. to secs 23, 24, 25, and 26, Tp. 5N R14W
brs. N. 33° 49' E 419.93ft.

No ^{other} bearings available.

Thence S. 89° 56' E. Va. 14° 15' E.

50.0 Cross wash, 7ft wide, course N. 45° E.

253.81 Intersect line between secs 25 & 26, Tp. 5N. R14W at
S. 0° 01' E 349.16ft from sec. Cor. and N. 0° 01' W 2290.84ft
from $\frac{1}{4}$ cor.

300.0 To S. center end, identical with location, a mound of
stone 2x2ft.

600.0 To cor. No. 2, identical with location.

A granite stone in place 1.5x6x3ft above ground,
chiseled x 2-D.G.E. 3587.

No bearings available.

Location cor. mound of stone 2x2ft.

-----o-----

Thence N. 53° 46' W. Va 14° 15' E.

350.0 Cross wash, 10ft wide, course N. 70° E

454.1 Intersect line between secs 25 & 26 Tp. 5N., R14W.,
S. 0° 01' E 81.22ft from sec. cor. and N. 0° 01' W 2558.78ft
from $\frac{1}{4}$ cor.

983.2 To cor. No. 3., identical with location, and cor. No. 1
Desert Glen, and Cor. No. 2 Lily Lodes of this survey,
hereinbefore described.

-----o-----

Thence N. 89° 56' W. Va. 14° 15' E.

57.0 Cross wash, 5ft wide, course N. 65° E

500.0 To N. center end, identical with location, and with S.
center end of Desert Glen Lode of this survey herein-
before described.

500.0 To cor. No. 4, identical with location and with cor. No.
1 Rose, and Cor No. 2 Desert Glen Lodes of this survey,
Hereinbefore described.

Survey No. 3587.

Desert Glen Extension Lode Continued.

985.2 Thence S. 53° 46' E. Va. 14° 15' E
To cor. No. 1, place of beginning.

-----o-----

Lode Lines.

As near as can be determined from present develop-
ments the veins of the several locations embraced
in this claim extend as follows from their respect-
ive discovery points:

Lily Lode, 628.0ft S. 0° 04' W, and 872ft N. 0° 04' E.

Desert Glen Lode, 640ft S. 0° 04' W, and 860ft N. 0° 04' E

Rose Lode, 1085ft S. 0° 04' W, and 415ft N. 0° 04' E.

Desert Glen Extension Lode, 54ft N. 53° 46' W, and 929.2 ft.
S. 53° 46' E.

-----o-----

AREA.

	Acres
Total area, Lily Lode	19.112 ✓
Total area Desert Glen Lode	20.861 ✓
Total area Rose Lode,	17.218 ✓
Total area Desert Glen Extension Lode,	7.992 ✓

-----o-----

LOCATION.

This survey is located in sections 24 and 25 surveyed
and in sections 23 and 26, unsurveyed, Tp. 5N., R14. Gila
and Salt River Base and Meridian. In the Ellsworth
Mining District, Yuma County, Arizona.

-----o-----

ADJOINING CLAIMS.

This Claim is bounded on the north by unknown
claims, and U.S. land. On all other sides by U.S. land.

-----o-----

EXPENDITURE OF FIVE HUNDRED DOLLARS.

I certify that the value of the labor and improve-
ments made upon, or for the benefit of, each of the lo-
cations in this claim, by the claimant or its grantors
is not less than five hundred dollars, and that said

AUG 30 1904

*Examined
G. C. J.*

*Copied by
a. Patch*

(4-683.)

Mineral Survey No. 1888

Lot No.

~~Tussock~~ Parrott Land District.

FIELD NOTES

OF THE SURVEY OF THE MINING CLAIM OF

Yellowbird Gold Mining Co.

KNOWN AS THE

Mendota, Ventura, Coronad & Security Places
Ellsworth Mining District,

Yuma County, Arizona
Section Unsurveyed, Township 5-N, Range 14 W. 49-AB Bdu.

Surveyed under instructions dated March 8, 1904
by William H. Elliott,
U. S. Deputy Mineral Surveyor.

Claim located ~~Jan 10th 1904~~ See Notation ~~Feb 10th 1904~~, 1904
Survey commenced June 24th, 1904
Survey completed June 28, 1904

o 6-100

Post office address of Atty-in-fact.

*Paul Youngling
Harrisburg, Yuma Co., Ariz.*

*200 Acres OK
Lusack*

YELLOW BIRD GROUP.

Mendota Lode.

Beginning at Cor. No.1, A Quartzsite stone, 26x8x6 inches set 14 inches in ground, with mound of stone chiseled *N. 69° 30' E* 1888 M.1, from which U.S.L.M. No. 1888 bears ~~N. 81° 32' E.~~ *1238.* 1700.5 ft. distant. No other bearings obtainable.

Thence ~~N~~ 80° 30' W.

300 To south end center of lode, Amount of stone, 3ft. base and 3ft. high,

600 To Cor. No.2, A Quartzsite stone, 30x8x6 inches, set 18 inches in ground, with mound of stone, chiseled 1888 M.2 No bearings obtainable.

Thence N. 9° 40' E.

180.2 *Cor. No.1, Security Place of this same survey*
1485.4 To Cor. No.3, A Syenite Stone, 28x12x8 inches, set 16 in. in ground, with mound of stone chiseled 1888 M.3. No bearings obtainable.

Thence S. 80° 30' E.

300 To north end center of lode, Amount of stone, 3ft. base and 3ft. high,

600 To Cor. No.4, A Syenite Stone, 30x8x4 inches, set 18 inches in ground, with mound of stone chiseled 1888 M.4. No bearings obtainable.

Thence S. 9° 40' W.

51.4 to Cor. 3 *Corner of this survey*
1485.4 To Cor. No.1, The place of beginning.

All corners identical with corners of location.

Variations at all Cors. 13° 35' E.

V.M.H/

CORONET LODE.

Feet	Beginning at Cor. No.1, A Schist Stone, 24x6x6 inches, set 14 inches in ground, with mound of stone chiseled 1888 C.1, from which U. S. L. M. No. 1888 bears N. 45° 19'E. 931.7 ft. distant. No other bearings available.
300	Thence N. 80° 30' W. To south end center of lode, A mound of stone, 3ft. base and 3 ft. high.
473	To Cor. No.2, A Schist Stone, 28x14x6 inches, set 20 ¹⁶ inches in ground, with mound of stone chiseled 1888 C.2
51	Thence N. 9° 40'E. To Cor. No.1 of Mendota lode of this survey.
1485.4	To Cor. No.3, A Sphynite Stone, 36x8x4 inches, set 20 inches in ground, with mound of stone, chiseled 1888 C.3. No bearings obtainable.
173	Thence S. 80° 30'E. To north end center of lode, A mound of stone, 3ft/ base and 3ft. high.
473	To Cor. No.4, A Quartz Stone, 24x12x8 inches, set 14 inches in ground, with mound of stone chiseled 1888 C.4. No bearings obtainable.
1485.4	Thence S. 9° 40'W. To Cor. No.1, the place of beginning. All corners identical with corners of location. Variation at all corners 13° 35'E.

003

002

003
002

002

002
001

Venture Lode.

Feet	
	<p>Beginning at Cor. No.1, identical with Cor.No.1 of Coronet Lode this survey, A Schist Stone, 24x6x6 inches, set 14 inches in ground with mound of stone chiseled 1888 V.1, from which U.S.L.M. ^{No 1888} bears N.45° 19'E., 931.7ft. distant. No other bearings available.</p> <p style="text-align: center;">Thence S. 9° 30' W.</p>
1500	<p>To Cor. No.2, A Quartzsite Stone, 20x12x5 inches, set 12 inches in the ground, with mound of stone chiseled 1888 V.2. No bearings obtainable.</p> <p style="text-align: center;">Thence N. 80° 30' W.</p>
300	<p>To south end center of lode, A mound of stone 3ft/ base and 3ft. high</p>
473	<p>To Cor. No.3, A Schist Stone, 20x6x6 inches, set 12 in. in ground, with mound of stone chiseled 1888 V.3, from which an Iron Wood tree, 10 inches in diameter scribed 1888 V. No.3 B.T., bears S.25° 25'E. ,6ft. distant.</p> <p style="text-align: center;">Thence N. 9° 30'E.</p>
1500	<p>To Cor. No.4, identical with Cor. No.2, Coronet Lode, this survey, A Schist Stone, 28x14x6 inches, set 16 inches in ground with mound of stone chiseled 1888 V. 4. No bearings obtainable.</p> <p style="text-align: center;">Thence S. 80° 30'E.</p>
175	<p>To north end center of lode, a mound of stone, 3ft/base and 3ft/ high</p>
473	<p>To Cor. No.1, the place of beginning. All corners identical with Cors. of location. Variation at ^{all} Cors. 13° 35' [±].</p>

June 1885

LODE LINES.

The presumed course of lode lines is as follows:

Mendota Lode

From Discovery shaft No.1 N.9° 40'E. 750 ft. and ~~79°~~^{S. 9°}
40'W., 735.4ft.

Coronet lode

From discovery shaft No.1 N.9°, 40'E., 750 ft. and S.
9° 40'W., 735.4 ft.

Venture Lode.

From discovery shaft No. 1 N. 9° 30' E. 10 ft. and S.
9° 30' W. ,1490 ft.

SECURITY PLACER

Beginning at Cor. No.1, on line 2-3 Mendota lode this survey, A Quartzsite Stone, 20x6x6 inches set 12 inches in ground, with mound of stone chiseled 1888 S.1, from which U.S.L.M. No.1888 bears N. 81° 32' E. 1700.5 ft. distant. Cor.No.2 Mendota Lode this survey, bears S. 9° 40' W. 180.0 ft. distant. No other bearings obtainable.

Thence N. 80° 30' W.

660 To Cor. No.2, A Schist Stone, 32x12 x6 inches set 18 in. in ground, with mound of stone chiseled 1888S.2, from which an Iron Wood tree, 8 inches in diameter scribed 1888S.2 B.T/ bears S. 9° 25'E., 23ft. distant.

Thence N. 9° 40'E

700 Wash 20ft. wide, course S.W.

1305.4 To Cor. No.3, A Schist Stone, 24x12x6 inches, set 16 in. in ground with mound of stone chiseled 1888 S.3. No bearings obtainable.

Thence S. 80° 30' E.


420 Wash 20 ft. wide, Course S.W.


660 To Cor. No. 4, identical with Cor. No.3, Mendota Lode, this survey, A Syenite Stone 28x12x8 inches, set 16 in. in ground, with mound of stone chiseled 1888 S.4. No bearings obtainable.

Thence S. 9° 40' W.

1305.4 To Cor. No.1, the place of beginning.
All Cors. identical with corners of location.
Var. at all Cors. 13° 35' E.


SURVEY 1888

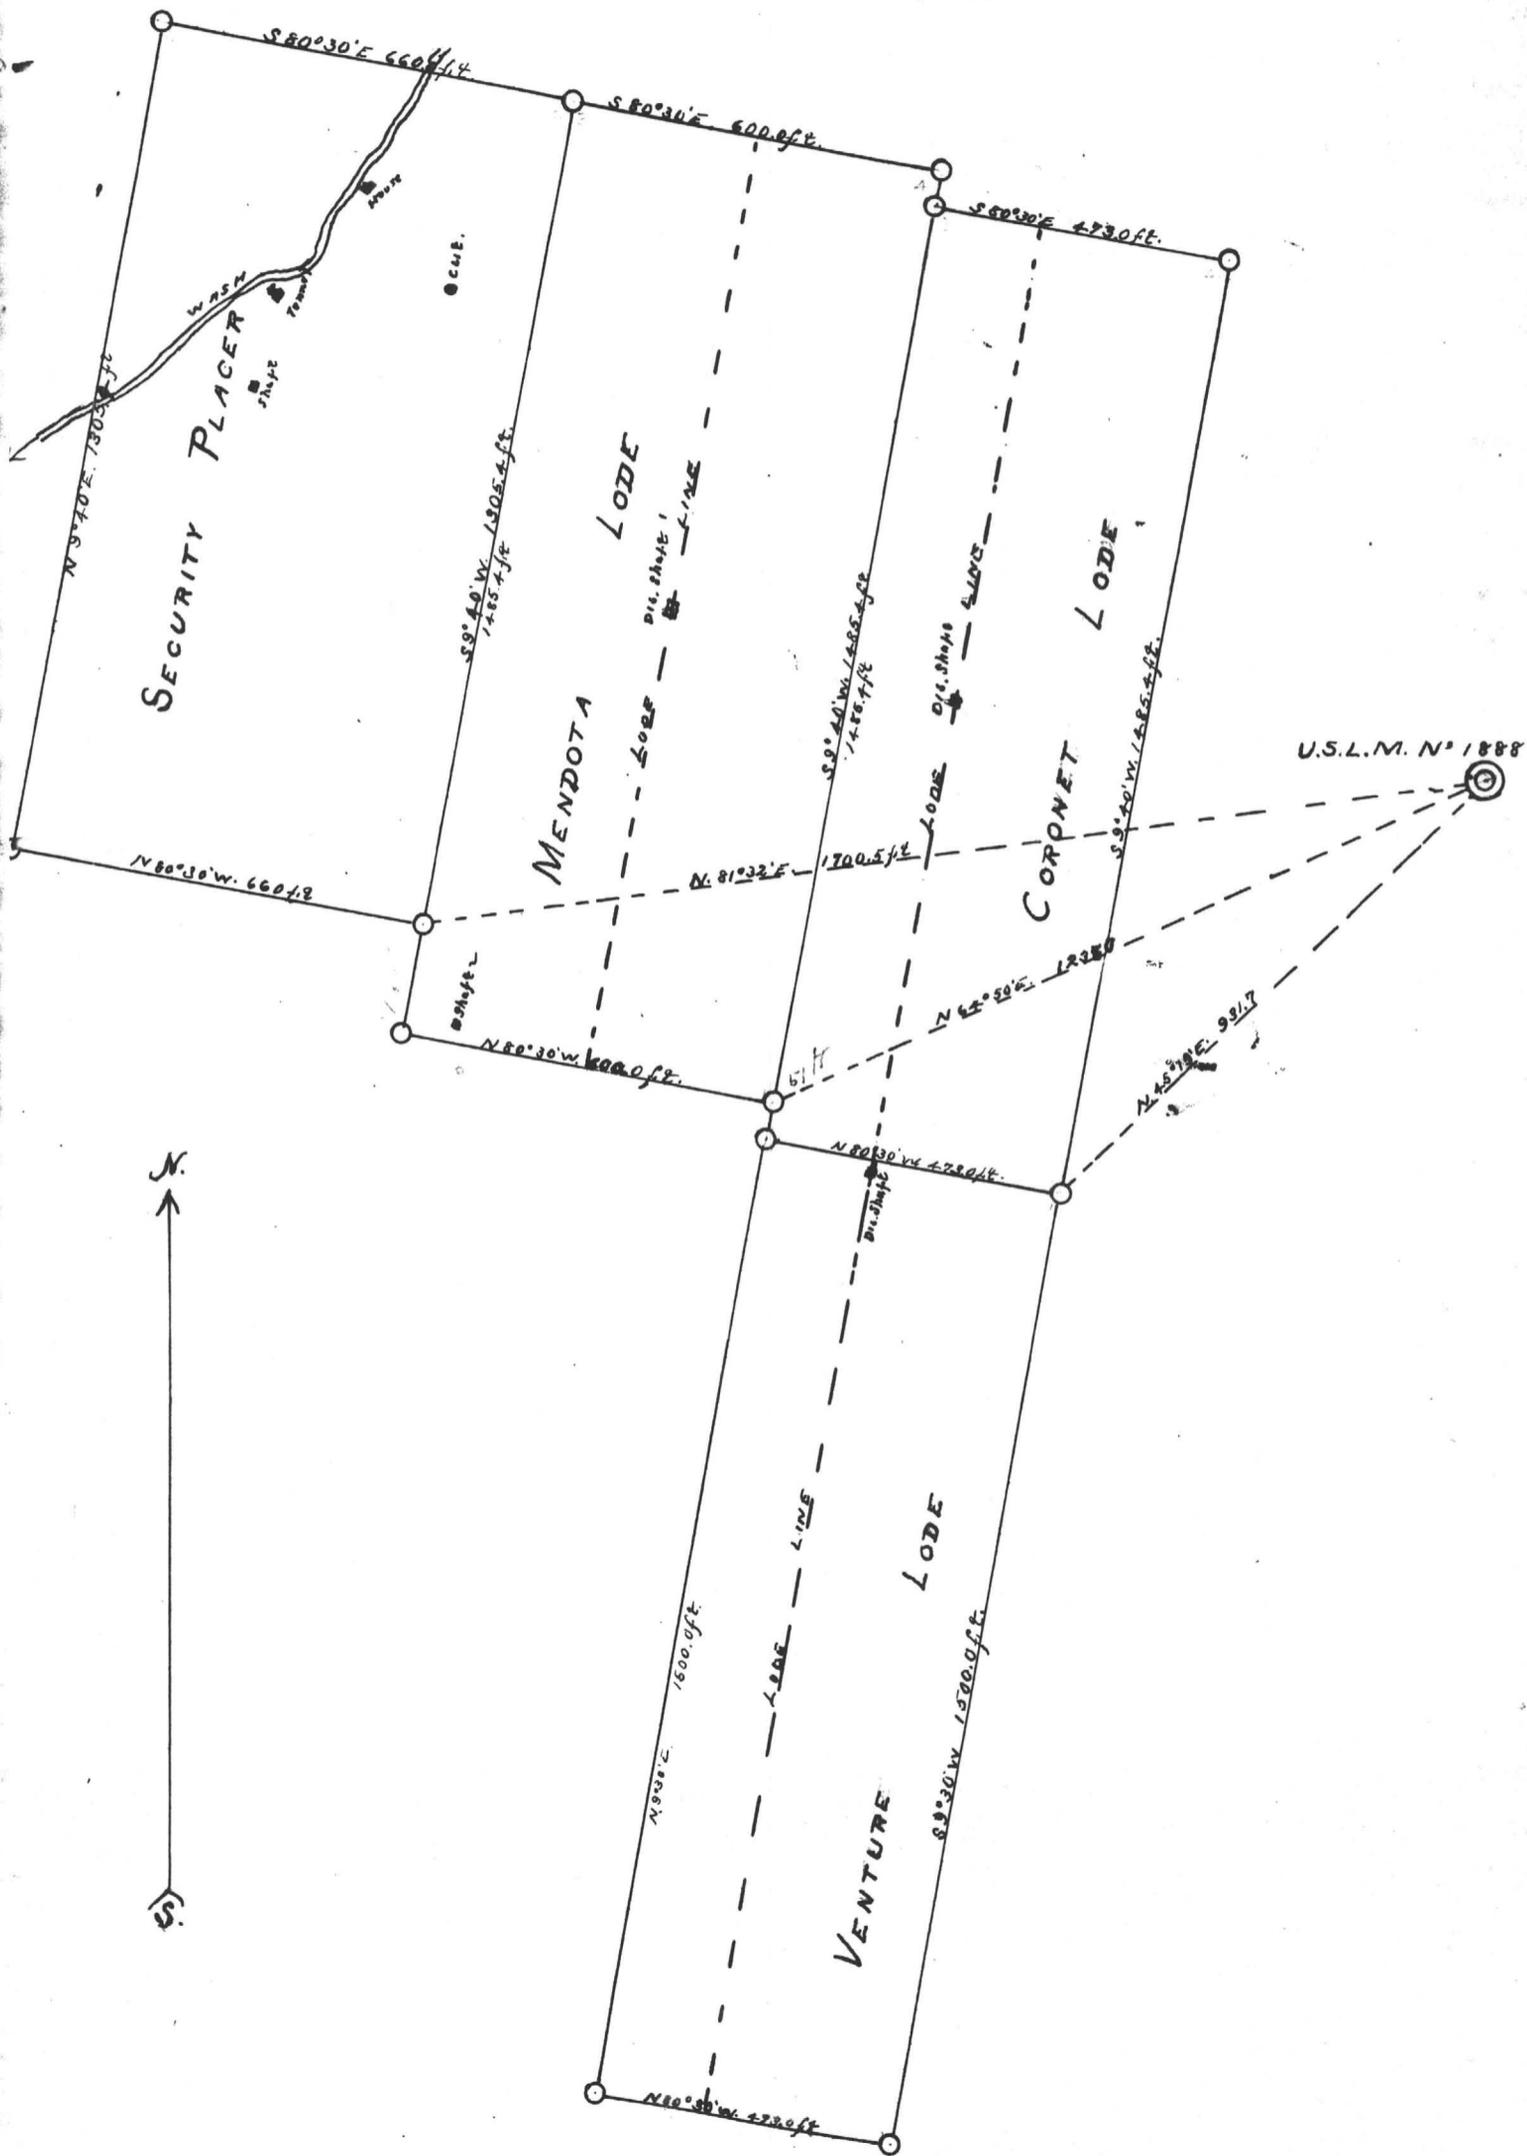



Scale 1:50,000
Projection UTM
Datum WGS 84

WT 1004 NE 957

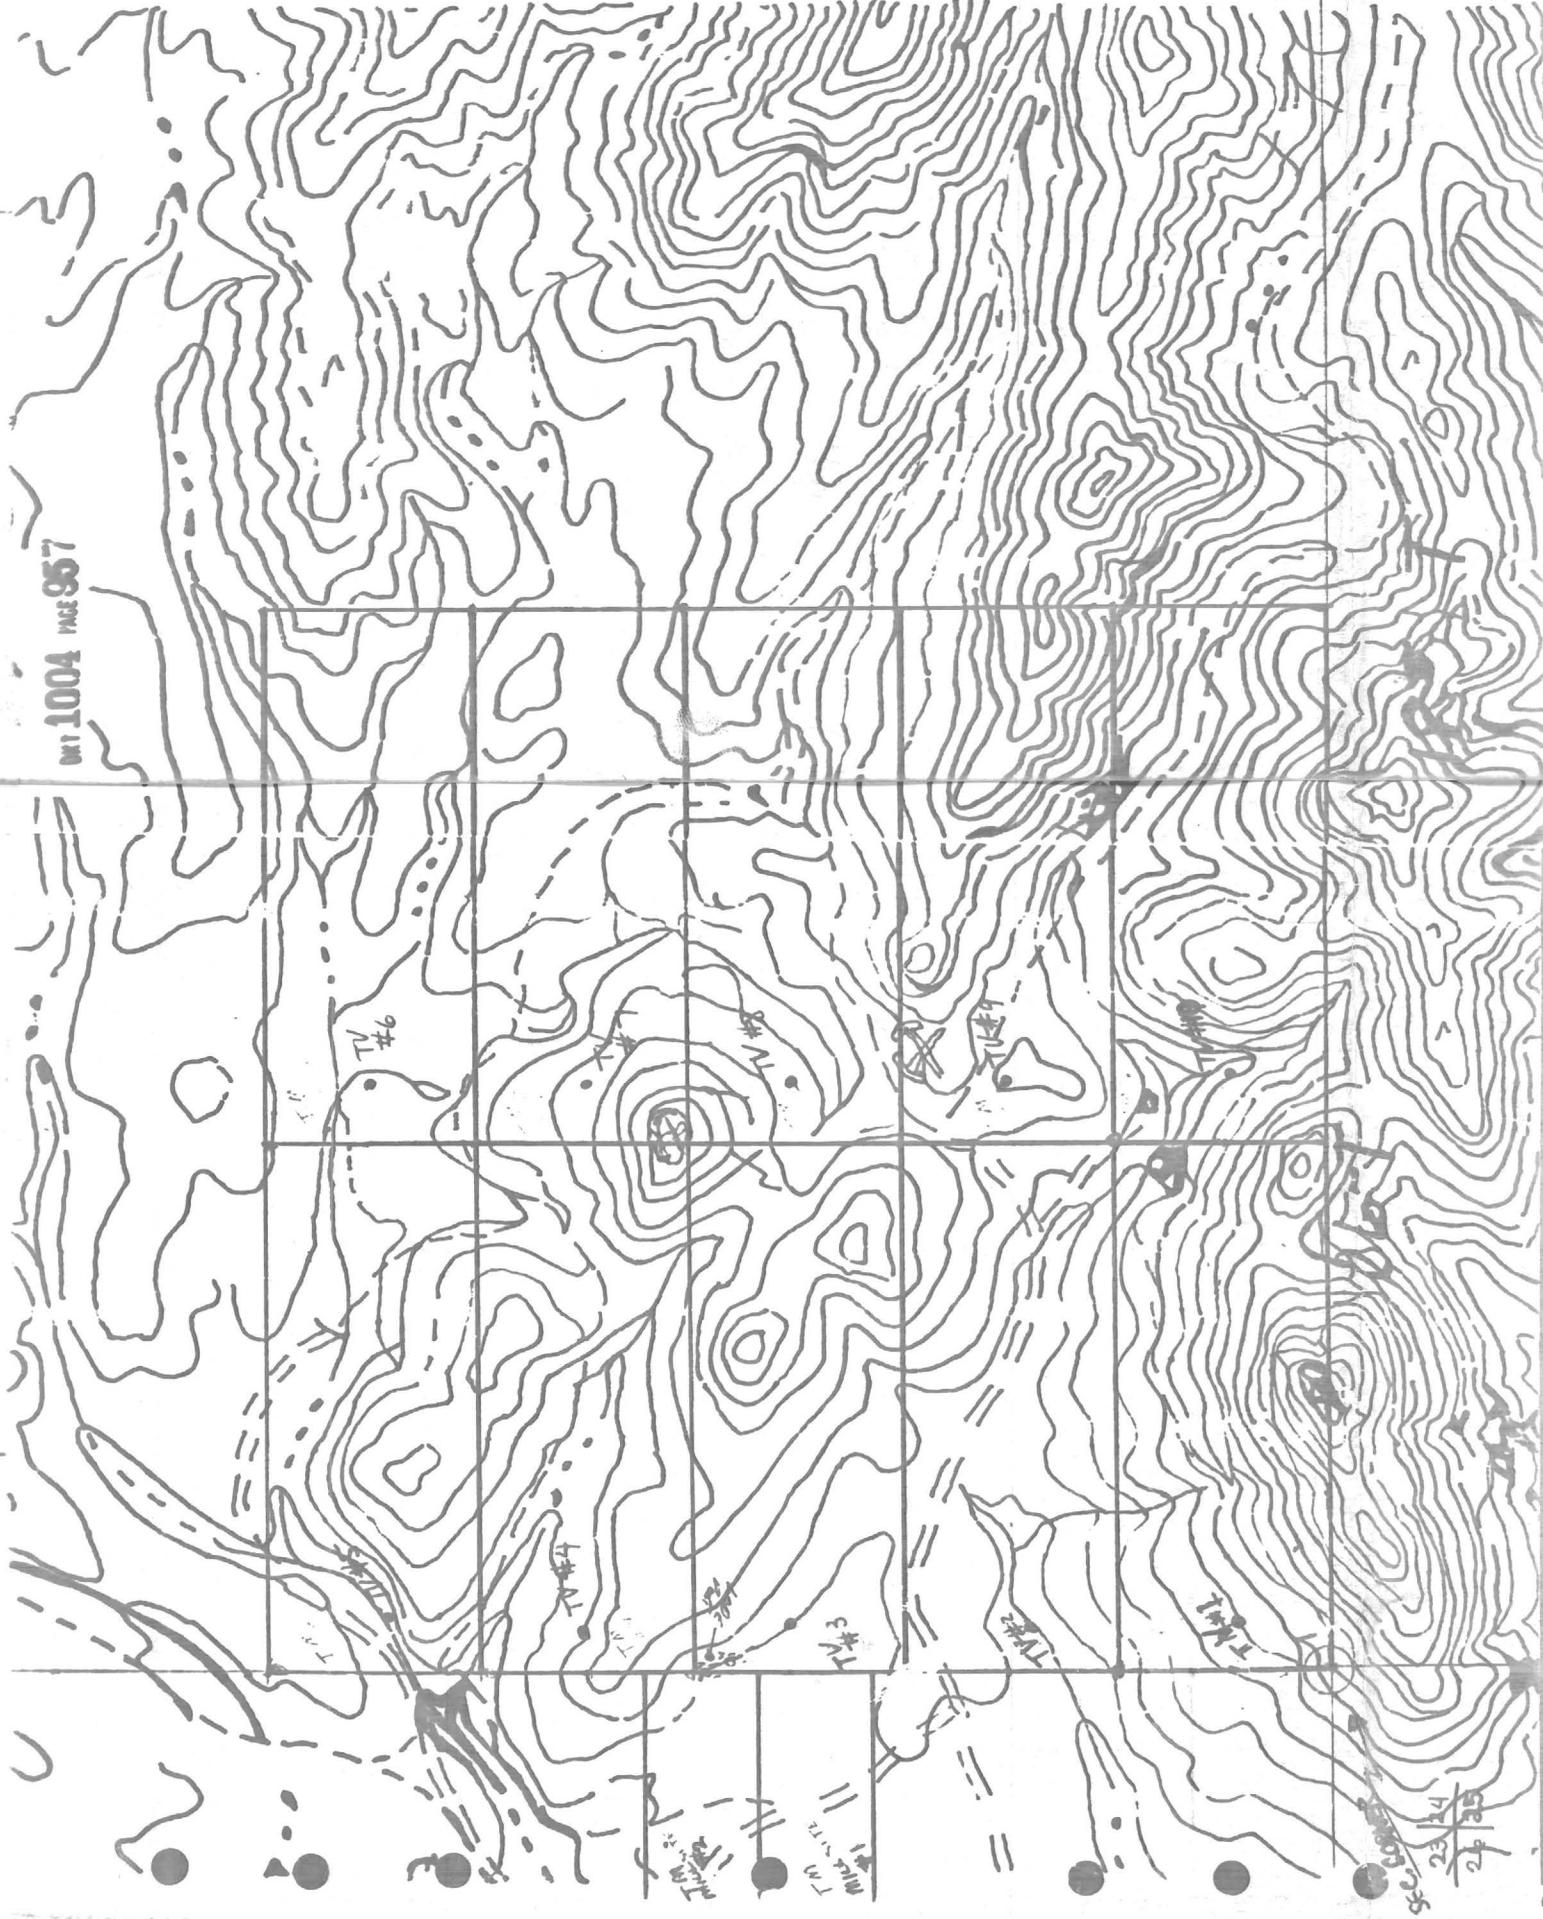

Doc. 1105 REC 593

STATE OF ARIZONA, I hereby certify that the within instrument was filed and recorded Fee No.:
 County of Yuma 1979 Jun 18 at _____ M. **14793**
 In Doc. No. 1105 Page 593-594 at the request of
Michael C Sansone

When recorded mail to:
 MICHAEL C SANSONE
 Box 111
 Aguila, Arizona 85320

Witness my hand and official seal
 By Michael C Sansone County Recorder
 _____ Recorder Fee: \$

YUMA COUNTY RECORDER
 ARIZONA

Notice of Mining Location

LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

The name and address of the Locator is

Michael C Sansone
 P.O. Box 111
 Aguila, Arizona 85320

The Locator is a citizen of the United States of America.

The name of the claim is ACM-15

The date of the location is 24 May, 1979.

The claim is 586 feet wide and 1320 feet long, excepting those claims which abut existing right-of-way of the Santa Fe Railroad and situated in Sections 26 & 27, T5N, R14W, as shown on the plat of survey attached hereto on the reverse side of this notice.

The general course of the claim is from West to East.

The claim is situated in SECTION 26, T5N, R14W, G&SRB&M, ELLSWORTH MINING DISTRICT, Yuma County, Arizona.

The location of this claim is more particularly depicted on the plat of survey which is attached hereto on the reverse side hereof.

The location of the claim with reference to a permanent object is approximately 2 miles in a direction of Northwardly from the townsite of Hope, Arizona.

Dated 12 June, 1979, at Aguila, Arizona. Locator Michael C Sansone
 Michael C Sansone,

JUN 27 1979

1105-715

STATE OF ARIZONA } I hereby certify that the within instrument was filed and recorded
 County of Yuma } ss. _____, 19____, at _____ M.
 In Docket No. 1105 Page 18 AM 8:09 at the request of Michael C. Sansone
 Fee No.: **14853**

When recorded mail to:
 MICHAEL C SANSONE
 Box 111
 Aguila, Arizona 85320

Witness my hand and official seal.

 CARE N. BETTS
 County Recorder
 By [Signature]
 Deputy Recorder
 Fee: \$ 3.00

Notice of Mining Location

LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

The name and address of the Locator is

Michael C Sansone
 P.O. Box 111
 Aguila, Arizona 85320

The Locator is a citizen of the United States of America.

The name of the claim is ACM-02

The date of the location is 24 May, 1979.

The claim is 586 feet wide and 1320 feet long, excepting those claims which abut existing right-of-way of the Santa Fe Railroad and situated in Sections 26 & 27, T 5 N, R 14 W, as shown on the plat of survey attached hereto on the reverse side of this notice.

The general course of the claim is from West to East.

The claim is situated in SECTION 22, T 5 N, R 14 W, G&SRB&M, ELLSWORTH MINING DISTRICT, Yuma County, Arizona.

The location of this claim is more particularly depicted on the plat of survey which is attached hereto on the reverse side hereof.

The location of the claim with reference to a permanent object is approximately 2 1/2 miles in a direction of Northwardly from the townsite of Hope, Arizona.

Dated 12 June, 1979, at Aguila, Arizona. Locator Michael C Sansone
 Michael C Sansone,

NOTICE OF MINING LOCATION LODE CLAIM

NOTICE IS HEREBY given that the VENTURE

lode mining claim was located by _____

CHARLES E. WILLMORE

whose address(s) is (are) 315 STANFORD SE, ALBUQUERQUE NM, 87106

on NOV 11, 1979.

This notice amends claim _____, which has
been ~~fully~~ recorded in the office of the clerk of _____
County in book _____ page _____.

This claim is 1,500 feet in length along the vein or
deposit of mineral bearing rock in place and 600 feet in width
(300 feet on either side of the center line of the claim),
forming a claim in the shape of a parallelogram. The general
course of the claim is NORTH-SOUTH.

This notice is posted at the ^{NORTH WEST} corner of the claim, which location
monument is in section 6, township 5 NORTH,
range 14 WEST, G & SRM.

The claim is situated in the ELLSWORTH

Mining District approximately 3900 feet NORTH 53° EAST FROM
U.S. L.O. CORNER MONUMENT
SEC 1 & 12, T5N, R15W and falls within the SE 1/4
SEC 6 & 7, T5N, R14W

of section(s) 6

township 5 NORTH

range 14 WEST, G & SRM XUMA

County, Arizona.

Charles E. Willmore
LOCATOR

LOCATOR

Notice of Mining Location
LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the FRIENDSHIP #1 Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by JAMES D. & HAZEL F. SEDFIELD - WHO ARE BOTH CITIZENS OF THE UNITED STATES

(Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.") the undersigned, on the 10th day of OCTOBER, 1974

The length of this claim is 1500 feet and W.E. claim 1500 feet in a NORTHERLY direction and 300 S.W. feet in a SOUTHERLY direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the SOUTHERLY to the NORTHERLY

The claim is situated and located in the LUSWORTH Mining District, in YUMA county, in the State of Arizona, about 4 MI in a NORTH WESTERLY direction from VICKSBURG, ARIZONA ABOUT 1 MILE WESTERLY OF TRUE BLUE MINE

The surface boundaries of the claim are marked upon the ground as follows: Beginning at CENTER SOUTHERLY END MONUMENT at a point in a SOUTHERLY direction 50 feet from the discovery shaft (at which this notice is posted), being in the center of the SOUTH end line of said claim; thence 300 feet to a POST MONUMENT, being the SOUTH WESTERLY corner of said claim; thence 1500 feet to a POST MONUMENT being at the NORTH WESTERLY corner of said claim; thence 300 feet to a POST MONUMENT the center of the NORTHERLY end of this claim; thence 300 feet to a POST MONUMENT being at the NORTH EASTERLY corner of said claim; thence 1500 feet to a POST MONUMENT at the SOUTHEASTERLY corner of said claim; thence 300 feet to the place of beginning.

Dated and posted on the ground this 10th day of OCTOBER, 1974. Louis E. Dean, Hazel F. Sedfield (Witness and Locator(s))

STATE OF ARIZONA COUNTY OF YUMA ss.

21083

Witness my hand and official seal the day and year aforesaid.

I hereby certify that the within instrument was filed and recorded at request of James D. Sedfield

Caro J. Bette County Recorder.

1974 OCT 15 AM 10 15

By Deputy Recorder.

on at M, Docket 629

Fee 2.00

Table with 3 columns: Indexed, Photostat Compared, Blotted

Page 678

Notice of Mining Location

LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the FRIENDSHIP #2 Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by JAMES D. & HAZEL F. SCOFIELD - BOTH CITIZENS OF UNITED STATES

(Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.") the undersigned, on the 10th day of OCTOBER, 1974

The length of this claim is 1500 feet and WE claim 1450 feet in a NORTHERLY direction and 50 feet in a SOUTHERLY direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the SOUTHERLY to the NORTHERLY.

The claim is situated and located in the FELSWORTH Mining District, in YUMA county, in the State of Arizona, about 4 MILES in a NORTH WESTERLY direction from VICKS BURG, ARIZONA ABOUT 1 MILE WESTERLY OF TRUE BLUE MINE - ADJACENT TO WESTERLY SIDE OF FRIENDSHIP #1

The surface boundaries of the claim are marked upon the ground as follows: Beginning at CENTER SOUTHERLY END MONUMENT

at a point in a SOUTHERLY direction 50 feet from the discovery shaft (at which this notice is posted), being in the center of the SOUTH

end line of said claim; thence 300 feet to a POST MONUMENT, being the SOUTHWESTERLY corner of said claim; thence 1500 feet to a POST MONUMENT being at the NORTHWESTERLY corner of said claim; thence 300 feet to a POST MONUMENT at the center of the NORTHERLY end of this claim; thence 300 feet to a POST MONUMENT, being at the NORTHEASTERLY corner of said claim; thence 1500 feet to a POST MONUMENT at the SOUTHEASTERLY corner of said claim; thence 300 feet to the place of beginning.

Dated and posted on the ground this 10th day of OCTOBER, 1974
Louis E Dean James D Scofield
Faye Dean Hazel F Scofield
Witness XXXXXXXXXX Locator(s)

STATE OF ARIZONA } ss.
COUNTY OF Yuma

I hereby certify that the within instrument was filed and recorded at request of James D Scofield

21084

on 1974 OCT 15 AM 10 16 at

M, Docket 829
Page 679

Witness my hand and official seal the day and year aforesaid.

Carroll Setts
County Recorder.

By _____ Deputy Recorder.

Indexed	Photostat Compared	Blotted
---------	--------------------	---------

Notice of Mining Location LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the FRIENDSHIP #3
Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by JAMES D. & HAZEL F. SCOFFIELD - BOTH CITIZENS OF UNITED STATES

(Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.")
the undersigned, on the 10th day of OCTOBER, 1974

The length of this claim is 1500 feet and WE claim 14.50 feet in a NORTHERLY direction and 50 feet in a SOUTHERLY direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the SOUTHERLY to the NORTHERLY.

The claim is situated and located in the ELLSWORTH Mining District, in YUMA county, in the State of Arizona, about 4 MILES in a NORTH WESTERLY direction from VICKS BURG, ARIZONA ABOUT 1 MILE WESTERLY OF TRUE BLUE MINE - ADJACENT TO WESTERLY SIDE OF FRIENDSHIP #2

The surface boundaries of the claim are marked upon the ground as follows:
Beginning at CENTER SOUTHERLY END MONUMENT

at a point in a SOUTHERLY direction 50 feet from the discovery shaft (at which this notice is posted), being in the center of the SOUTH

end line of said claim; thence 300 feet to a POST MONUMENT, being the SOUTH WESTERLY corner of said claim; thence 1500 feet to a POST MONUMENT being at the NORTH WESTERLY corner of said claim; thence 300 feet to a POST MONUMENT at the center of the NORTHERLY end of this claim; thence 300 feet to a POST MONUMENT being at the NORTHEASTERLY corner of said claim; thence 1500 feet to a POST MONUMENT at the SOUTHEASTERLY corner of said claim; thence 300 feet to the place of beginning.

Dated and posted on the ground this 10th day of OCTOBER, 1974

James D. Scofield
Jay Dean
Witness

James D. Scofield
Hazel F. Scofield
Locators
XXXXXXXXXXXX

STATE OF ARIZONA }
COUNTY OF Yuma } ss.

21085

Witness my hand and official seal the day and year aforesaid.

I hereby certify that the within instrument was filed and recorded at

request of James D. Scofield

1974 OCT 15 AM 10 16

Cara R. Betts
County Recorder.

on _____ at _____

By _____ Deputy Recorder.

_____ M, Docket Ex 9

Fee 2.00

Page 680

Indexed	Photostat Compared	Blotted
---------	--------------------	---------

Victory no. 2 Doc 270 Page 115

4
Refile

Notice of Mining Location
LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Victory No. 1
Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by Sam Saxon ~~and~~ Charles Hallman citizens of the U.S.
(Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States")
the undersigned, on the 20 day of December 1974

The length of this claim is 1500 feet and we claim 1500 feet in a Southerly direction and 300 on each side feet in a of 1500 direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the NW and SE to the discovery 20 ft from stone monument

The claim is situated and located in the Chewath Mining District, in Yuma county, in the State of Arizona, about 2 1/2 miles from Vicksburg in a NE direction from Vicksburg joins No. 2 Victory claim south end of center which joins the patented yellow bird group southerly end from shaft NE from discovery

The surface boundaries of the claim are marked upon the ground as follows:
Beginning at stone monument discovery point 1500 southerly to center of claim by stone monument
at a point in a SE 1500 direction 1500 feet from the discovery shaft (at which this notice is posted), being in the center of the claim
1500 ft stone monument
end line of said claim; thence NE 300 feet to a stone monument, being the SE corner of said claim; thence SW 300 feet to a stone monument being at the SW 300 corner of said claim; thence 300 to monument feet to a stone monument at the center of the claim end of this claim; thence noutherly 1500 feet to a stone monument, being at the NW corner of said claim; thence 300 feet to a NE of discovery at the NW corner of said claim; thence 300 NE corner 1500 southerly end of monument 300 ft to center of claim feet to the place of beginning.

Dated and posted on the ground this 20 day of December, 1974
Doris Saxon Charles B. Hallman
Richard R. Rounds Witness Charles B. Hallman Locator(s)

STATE OF ARIZONA }
COUNTY OF Yuma } ss.
I hereby certify that the within instrument was filed and recorded at request of Ethel Saxon

21534

Witness my hand and official seal the day and year aforesaid.

Carol Beth
County Recorder.

By _____ Deputy Recorder.

on 1974 OCT 23 PM 3 57 at _____
M, Docket 830
Page 624

200
Fee \$100

Indexed	Photostat Compared	Blotted
---------	--------------------	---------

Charles Hallman
Box 1122 Vicksburg, Az.

Excerpts from the Mining Laws of the State of Arizona

Title XXXIV of the Revised Statutes of 1923, Chap. 1, and Amendments thereto.

Section 4033. Such location shall be made by erecting at or contiguous to the point of discovery a conspicuous monument of stone not less than three feet in height, or an upright post, securely fixed, projecting at least four feet above the ground, in which monument of stones or on which post there shall be posted a location notice which shall be signed by the name or names of the locator or locators.


Sec. 4030. From the time of the location of a mining claim, as above specified, the locator shall be allowed ninety days within which to do or cause to be done the following things:

2. To sink a discovery shaft in the claim to a depth of at least eight feet from the lowest part of the rim of the shaft at the surface, and deeper, if necessary, until there is disclosed in said shaft mineral in place.

Sec. 4032. Such surface boundaries shall be marked by six substantial posts projecting at least four feet above the surface of the ground, or by substantial stone monuments at least three feet high, to-wit: One at each corner of said claim and one at the center of each end-line thereof.

Provided, however, that when the point of a monument of a mining claim is at the same point, and coincides with a monument of the survey of the United States, the monument of such government survey shall be and is hereby declared to be a mining claim monument of claims heretofore or hereafter located.

Sec. 4034. Location notices may be amended at any time and the monuments changed to correspond with the amended location; Provided, That no change shall be made that will interfere with the rights of others.

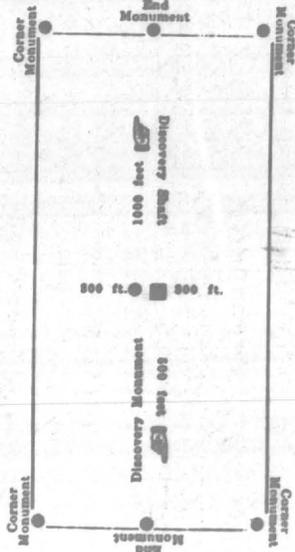

This diagram is to give locator a general idea of plan of location under the new law. The Discovery Shaft can be in the center of claim or any distance from either end desired. In the diagram it is placed 500 feet from one end, and 1000 feet from the other. Commence description of claim at a center end monument, giving its distance and direction from center of Discovery Shaft; thence bound the claim in either direction. In description be careful to state locality of claim with reference to some natural object or permanent monument, as will identify the claim.

Notice of Location

LODE CLAIM

Dated _____, 19____

STATE OF ARIZONA

County of _____ ss.

I hereby certify that the within instrument was filed and recorded at request of _____

Book _____

In Docket _____

on page _____

Witness my hand and official seal the day and year aforesaid.

County Recorder.

By _____

Deputy Recorder.

Charles Hollmann & Son Factory
1823



Work by David Foster

624-A

State of Arizona

County Yuma } ss

I hereby certify that the within instrument was filed and recorded
on 1974 AUG 26 AM 11 13

in Docket 822

at Page 748

at the request of Paul B. Gardlock

In witness whereof I have hereunto set my hand and seal.

When recorded mail to:
PAUL B. GARDLOCK
733 W - 18th ST.
SAN PEDRO, CALIF. 90731

Cara R. Roth
County Recorder

Deputy County Recorder

Fee No. **17447**

Compared
Photostated
Fee 2.00

LOCATION NOTICE

Lode Mining Claim

This mining claim, the name of which is the INDIAN SPRING #2
mining claim, was located by the undersigned PAUL B. GARDLOCK + THELMA GARDLOCK
on the 20TH day of AUGUST 1974

This claim is 1500 feet long and 600 feet wide, and the point of discovery
is 750 feet from the SOUTHERLY end and 750 feet from
the NORTHERLY end of this claim.

The general course of this claim is from SOUTHERLY to NORTHERLY

This claim is situated and located in the ELLSWORTH

Mining District, in YUMA County, State of Arizona, about 4 1/2 MILES
in a NORTHERLY direction from VICKSBURG ARIZ

THIS CLAIM RUNS FROM THE DISCOVERY MONUMENT, OR STAKE, ON WHICH THE NOTICE IS POSTED, 750' IN A NORTHERLY DIRECTION TO THE NORTHERLY CENTER END MONUMENT OR STAKE WHICH BORDERS THE SOUTHERLY END OF INDIAN SPRING CLAIM #1 AND 750' IN A SOUTHERLY DIRECTION FROM THE FORESAID LOCATION MONUMENT OR STAKE TO THE SOUTHERLY CENTER END MONUMENT OR STAKE AND IS ALSO MARKED BY TWO CORNER MONUMENTS OR STAKES AT EACH END OF SAID CLAIM, ONE ON EACH SIDE OF AND 300 FEET FROM THE CENTER END MONUMENTS OR STAKES MAKING THE CLAIM IN THE FORM OF A PARALLELOGRAM.

Dated and posted on the ground the day and year first above written.

WITNESSED BY

Eddie Toledo 332 W. 11TH ST. S.P.

Anthony ... 665 W 39ST SAN PEDRO, CA

Paul B. Gardlock

Thelma M. Gardlock

Notice of Mining Location

LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the ABGH MINE Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by ALMA Y HENRY WARD BERT Y GRACE IN FAVOR

(Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.") the undersigned, on the 9th day of MARCH, 1974

The length of this claim is 1500 feet and WE claim 300 feet in WESTERNLY direction and 300 feet in a EASTERNLY direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 1500 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the SOUTHERNLY to the NORTHERNLY.

The claim is situated and located in the ELLSWORTH Mining District, in YUMA county, in the State of Arizona, about 1 1/2 MILES WEST of VICKSBURG in a NORTH-WESTERNLY direction from VICKSBURG 1 1/2 MI. OF WATER MINE ABOUT 1 1/2 MI. WEST OF DESERT QUEEN MINE - 1 1/2 MI. EAST OF YUMA COPPER, 1/2 MI. SOUTH OF GLORY HOLE MINE, LAST KNOWN AS BINGHAM.

The surface boundaries of the claim are marked upon the ground as follows:

Beginning at WEST SIDE OF ABGH MINE #3 ROCK MONUMENT at a point in a SOUTHERNLY direction 300 feet from the discovery shaft (at which this notice is posted), being in the center of the SOUTHERNLY END end line of said claim; thence 300 feet to a SOUTHWESTERNLY CORNER, being the SOUTH-WESTERNLY corner of said claim; thence 1500 feet to a ROCK MONUMENT being at the NORTH-WESTERNLY corner of said claim; thence 300 feet to a ROCK MONUMENT at the center of the NORTHERNLY end of this claim; thence 300 feet to a ROCK MONUMENT, being at the NORTH-EASTERNLY corner of said claim; thence 1500 feet to a ROCK MONUMENT at the SOUTHEASTERNLY corner of said claim; thence 300 feet to the place of beginning.

Dated and posted on the ground this 7th day of MAR, 1974

Laini Dean Bert L. Griffith
Laini Dean Alma H. Ward
Witness Locator(s)
XXXXXX XXXXXX XXXXXX

STATE OF ARIZONA
COUNTY OF Yuma ss.

I hereby certify that the within instrument was filed and recorded at request of Mary Ward on 1974 MAR 15 AM 10 07

5438

Witness my hand and official seal the day and year aforesaid.

Carly Bette
County Recorder.

By _____ Deputy Recorder.

on _____ at _____ M, Docket 799

Page 9

Indexed	Photostat Compared	Blotted

Notice of Mining Location LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the A. B. G. H. MINE #3
Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by ALMA HENRY WARD
BERT A. GRACE LAFAVOR
(Locater must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.")
the undersigned, on the 9th day of MARCH, 1924

The length of this claim is 1500 feet and WE claim 300 feet in WESTERNLY direction and 300 feet in EASTERNLY direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 1500 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the SOUTHERNLY to the NORTHERNLY.

The claim is situated and located in the Ellsworth Mining District, in Yuma county, in the State of Arizona, about 1/2 mi. S.W. of Vicksburg and 3 mi. NORTH OF VICKSBURG VICKSBURG in NORTH-WESTERNLY direction from 1 1/2 miles from Water mine, about 1/2 mi. west of it, east of Green mine 1/2 east of general copper mine, 1/2 mi. south of Silver mine, last known as Bingham mine

The surface boundaries of the claim are marked upon the ground as follows:

Beginning at WEST SIDE OF A. B. G. H. MINE #1
ROCK LOCATED MONUMENT
at a point in a SOUTHERNLY direction 300 feet from the discovery shaft (at which this notice is posted), being in the center of the SOUTHERNLY END end line of said claim; thence 300 feet to a SOUTH-WESTERNLY CORNER corner of said claim; thence 1500 feet to a ROCK MONUMENT being at the NORTH-WESTERNLY corner of said claim; thence 300 feet to a ROCK MONUMENT at the center of the NORTHERNLY end of this claim; thence 300 feet to a ROCK MONUMENT, being at the NORTH-EASTERNLY corner of said claim; thence 1500 feet to a ROCK MONUMENT at the SOUTH-EASTERNLY corner of said claim; thence 300 feet to the place of beginning.

Dated, and posted on the ground this 9th day of MARCH, 1924

Alma Henry Ward Bert A. Grace LaFavor
Witness Locater(s)

STATE OF ARIZONA
COUNTY OF Yuma

5437

Witness my hand and official seal
the day and year aforesaid.

I hereby certify that the within instrument was filed and recorded at

Carroll R. Bost
County Recorder.

request of Henry Ward
1924 MARCH 15 AM 10 07

By _____
Deputy Recorder.

on _____ at _____

Indexed	Photostat Compared	Blotted
---------	--------------------	---------

_____ M, Docket 799

Page 8

Notice of Mining Location LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the FRIENDSHIP #4
Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by JAMES D. & HAZEL F. SCOFIELD - BOTH CITIZENS
OF UNITED STATES

(Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.")
the undersigned, on the 10th day of OCTOBER, 1974

The length of this claim is 1500 feet and WE claim 1450 feet in a NORTHERLY direction and 50 feet in a SOUTHERLY direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the SOUTHERLY to the NORTHERLY.

The claim is situated and located in the ELLSWORTH Mining District, in YUMA county, in the State of Arizona, about 4 MILES in a NORTH WESTERLY direction from VICKSBURG, ARIZONA - ABOUT 1 MILE WESTERLY OF TRUE BLUE MINE - ADJACENT TO WESTERLY SIDE OF FRIENDSHIP #3

The surface boundaries of the claim are marked upon the ground as follows:
Beginning at CENTER SOUTHERLY END MONUMENT

at a point in a SOUTHERLY direction 50 feet from the discovery shaft (at which this notice is posted), being in the center of the SOUTH

end line of said claim; thence 300 feet to a POST MONUMENT, being the SOUTH WESTERLY corner of said claim; thence 1500 feet to a POST MONUMENT being at the NORTH WESTERLY corner of said claim; thence 300 feet to a POST MONUMENT at the center of the NORTHERLY end of this claim; thence 300 feet to a POST MONUMENT, being at the NORTHEASTERLY corner of said claim; thence 1500 feet to a POST MONUMENT at the SOUTHEASTERLY corner of said claim; thence 300 feet to the place of beginning.

Dated and posted on the ground this 10th day of OCTOBER, 1974
Louis E. Dean Witness
James D. Scofield Locator(s)
Hazel F. Scofield
XXXXXXXXXX

STATE OF ARIZONA }
COUNTY OF Yuma } ss.

I hereby certify that the within instrument was filed and recorded at request of James D. Scofield
1974 OCT 15 AM 10 17

21086

Witness my hand and official seal the day and year aforesaid.

Cara N. Betts
County Recorder.

By _____ Deputy Recorder.

on _____ at _____
M, Docket 829

200
Fee ~~400~~

Indexed	Photostat Compared	Blotted
---------	--------------------	---------

Notice of Mining Location LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the... TRANSVERSE LODE #1 ... Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by TRANSVERSE MINES, INC., a citizen of the United States,

(Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.")
the undersigned, on the... day of... 19...

The length of this claim is 1500 feet and... we claim... 50 feet in a... west... direction and... 1450 feet in a... east... direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with... 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the... east... to the... west...

The claim is situated and located in the... Ellsworth Mining District, in Yuma county, in the State of Arizona, about... five miles in a... northeasterly... direction from McVay, Arizona, and located in Section 24, Township 6 North, Range 15 West, Gila and Salt River Base and Meridian.

The surface boundaries of the claim are marked upon the ground as follows:
Beginning at... 4' x 4' post

at a point in a... westerly... direction... 50 feet from the discovery shaft (at which this notice is posted), being in the center of the... west... end line of said claim; thence... 300 feet to a... post... , being the... northwest... corner of said claim; thence... 1500 feet to a... post... being at the... northeast... corner of said claim; thence... 300 feet to a... post... at the center of the... east... end of this claim; thence... 300 feet to a... post... , being at the... southeast... corner of said claim; thence... 1500 feet to a... post... at the... southwest... corner of said claim; thence... 300 feet to the place of beginning.

Dated and posted on the ground this... 8th day of... November, 19... 77

Wency Sellers Witness By [Signature] Locator(s)
TRANSVERSE MINES, INC.

STATE OF ARIZONA
COUNTY OF Yuma ss.

I hereby certify that the within instrument was filed and recorded at request of Jay Lewis



Witness my hand and official seal the day and year aforesaid.

[Signature]
County Recorder.

By... Deputy Recorder.

on... 971 NOV 9 AM 11 45 at

...M, Docket 1007

Page... 956-7

Indexed	Photostat Compared	Blotted
---------	--------------------	---------

Notice of Mining Location

LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the MIDAS # 1 Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by CHARLES E. WILLMORE AND DAVID L. LAXTON

(Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.") the undersigned, on the 12th day of APRIL, 1978

The length of this claim is 1500 feet and WE claim 25 feet in a NORTH direction and 1495 feet in a SOUTH direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the SOUTH to the NORTH

The claim is situated and located in the ELLSWORTH Mining District, in YUMA county, in the State of Arizona, about 1500 FEET in a S.15° W direction from THE COMMON CORNER MONUMENT of SECTIONS 31 AND 32 T6N, R14W, SECTIONS 5 AND 6 T5N, R14W U.S. GENERAL LAND OFFICE MONUMENT (1911)



The surface boundaries of the claim are marked upon the ground as follows: Beginning at MONUMENT

at a point in a NORTH direction 25 feet from the discovery shaft (at which this notice is posted), being in the center of the NORTH end line of said claim; thence EAST 300 feet to a MONUMENT, being the NORTHEAST corner of said claim; thence SOUTH 1500 feet to a MONUMENT being at the SOUTH EAST corner of said claim; thence WEST 300 feet to a MONUMENT at the center of the SOUTH end of this claim; thence WEST 300 feet to a MONUMENT being at the SOUTH WEST corner of said claim; thence NORTH 1500 feet to a MONUMENT at the NORTHWEST corner of said claim; thence EAST 300 feet to the place of beginning.

Dated and posted on the ground this 12th day of April, 1978. Witness: Geoffrey D. Mallison, Charles E. Willmore, David Laxton. Witness Locator(s)

STATE OF ARIZONA } ss. COUNTY OF YUMA

I hereby certify that the within instrument was filed and recorded at request of C. E. Willmore on 1978 APR 25 AM 9:39

Witness my hand and official seal the day and year aforesaid.

County Recorder. [Signature]

By [Signature] County Recorder.



on at Fee 300

Docket 1033 429 315 Stanford S.E. 87106

State of Arizona

County Yuma } as

DOCKET 796 PAGE 647

I hereby certify that the within instrument was filed and recorded

on

in Docket 796

1974 FEB 28 AM 9 58

at Page 647

at the request of Henry Ward

In witness whereof I have hereunto set my hand and seal.

Fee No.

4034

Compared

Photostated

Fee

2.00

When recorded mail to:

Mr. Henry Ward
P.O. Box 312

WENDEN, ARIZONA, 85357

CARA N. BETTS
County Recorder

Cara N. Betts

Deputy County Recorder

LOCATION NOTICE

Lode Mining Claim

WE RESERVE ALL WATERY MINING RIGHTS FILED WITH GOOD INTENDED

This mining claim, the name of which is the A. B. G. H. MINE #1

mining claim, was located by the undersigned ALMA HENRY WARD - BERT & GRACE

LAFAVOR on the 25th day of FEB 1974

This claim is 1500 feet long and 600 feet wide, and the point of discovery is 300 feet from the SOUTHERNLY end and 1200 FT. feet from the NORTHERNLY end of this claim.

The general course of this claim is from SOUTHERNLY to NORTHERNLY

This claim is situated and located in the ELLSWORTH

Mining District, in YUMA County, State of Arizona, about 1 1/2 MILES FROM in a _____ direction from DEWATER MINE.

ABOUT 1 1/2 MILES WEST OF DESERT QUEEN MINE

AND 1 1/2 MILES EAST OF YUMA COPPER MINE

1/2 MILE SOUTH OF GLORY HOLE MINE

LAST KNOWN AS BINGHAM MINE

Dated and posted on the ground the day and year first above written.

WITNESS } Louis E Dean Bert L. La Favor

WITNESS } Paul Dean Grace M. La Favor

P.O. Box 183 Alma H. Ward

Salome, Ariz. Henry H. Ward

Notice of Mining Location
LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the A.B.G.H. MINE ¹²
Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by
ALMA WARD & HENRY WARD
BERT & G. PAGE LAFAYETTE
(Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.")

the undersigned, on the 9th day of MARCH, 1924

The length of this claim is 1500 feet and 300 feet in a WESTERNLY direction and 300 feet in a EASTERNLY direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 1500 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the SOUTHERNLY to the NORTHERNLY.

The claim is situated and located in the ELLSWORTH Mining District, in YUMA county, in the State of Arizona, about 1/4 MILES WEST 13 MI NORTH in a NORTH WESTERNLY direction from VICKS BURG EAST SIDE OF A.B.G.H. MINE #1 - 1/2 MI. FROM WATER MINE ABOUT 1/2 MI. WEST

The surface boundaries of the claim are marked upon the ground as follows:

Beginning at ROCK-LOCATED MONUMENT
at a point in a SOUTHERNLY direction 300 feet from the discovery shaft (at which this notice is posted), being in the center of the SOUTHERNLY END
end line of said claim; thence 300 feet to a SOUTHERNLY CORNER, being the SOUTH WESTERNLY corner of said claim; thence 1500 feet to a ROCK MONUMENT being at the NORTH WESTERNLY corner of said claim; thence 300 feet to a ROCK MONUMENT at the center of the NORTHERNLY end of this claim; thence 300 feet to a ROCK MONUMENT, being at the NORTHEASTERNLY corner of said claim; thence 1500 feet to a ROCK MONUMENT at the SOUTHEASTERNLY corner of said claim; thence 300 feet to the place of beginning.

Dated and posted on the ground this 9th day of MAR, 1924

Gaye Dean
Louis Dean

Witness

Bert & G. Page Lafayette
Alma N. Ward
Locator(s)
XXXXXXX XXXXXX

STATE OF ARIZONA ss. COUNTY OF YUMA

5436

Witness my hand and official seal the day and year aforesaid.

I hereby certify that the within instrument was filed and recorded at request of Henry Ward

Carly Beth
County Recorder.

1974 MAR 15 AM 10 07

By _____ Deputy Recorder.

on _____ at _____

M, Docket 798

Indexed	Photostat Compared	Blotted
---------	--------------------	---------

Page 7 PO Box 312 Healds Ar. 85347

Notice of Mining Location
LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the GREENHILL #4
Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by J. LEWELLYN a citizen of the United States of America

(Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.")
the undersigned, on the 1st day of June, 1973

The length of this claim is 1500 feet and 2 claim 1100 feet in a EASTERN direction and 400 feet in a WESTERN direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the NORTH to the SOUTH

The claim is situated and located in the Ellsworth Mining District, in Yuma county, in the State of Arizona, about 3 miles in a Western direction from SM. LOME, Arizona on 21 hundred feet North of Survey post ~~marked~~ marked like this TOW R13W R13W

The surface boundaries of the claim are marked upon the ground as follows:
Beginning at DISCOVERY POST 1318
at a point in a EASTERN direction 1100 feet from the discovery shaft (at which this notice is posted), being in the center of the EASTERN

end line of said claim; thence SOUTH 300 feet to a POST, being the SOUTH EAST corner of said claim; thence West 1500 feet to a POST being at the SOUTH WEST corner of said claim; thence NORTH 300 feet to a POST at the center of the WEST end of this claim; thence NORTH 300 feet to a POST, being at the NORTH WEST corner of said claim; thence CAST 1500 feet to a POST at the NORTH EAST corner of said claim; thence SOUTH 300 feet to the place of beginning.

Dated and posted on the ground this 1st day of June, 1973

Supervisor
Bill Logan
Witness

J. Lewellyn
Locator(s)

STATE OF ARIZONA
COUNTY OF Yuma ss. **18146**
I hereby certify that the within instrument was filed and recorded at request of J. Lewellyn

Witness my hand and official seal the day and year aforesaid.
Carroll Bette
County Recorder.

1973 AUG 15 AM 11 53
on _____ at _____
M, Docket 769
Page 320

By _____
Deputy Recorder.

Indexed	Photostat Compared	Blotted
---------	--------------------	---------


1105-731

STATE OF ARIZONA, } I hereby certify that the within instrument was filed and recorded. Fee No.:
 County of Yuma } 1979 Jun 18 19 at _____ M. **14961**
 In Docket No. 1105 Page 951-9309 at the request of
Michael C. Sansone

When recorded mail to:
 MICHAEL C SANSONE
 Box 111
 Aguila, Arizona 85320

Witness my hand and official seal.
CARA N. BETTS
 County Recorder
Schmitt
 Deputy Recorder

Fee: \$ 300



Notice of Mining Location

LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

The name and address of the Locator is

Michael C Sansone
 P.O. Box 111
 Aguila, Arizona 85320

The Locator is a citizen of the United States of America.

The name of the claim is ACM-RQ

The date of the location is 24 May, 1979.

The claim is 586 feet wide and 1320 feet long, excepting those claims which abut existing right-of-way of the Santa Fe Railroad and situated in Sections 26 & 27, T 5 N, R 14 W, as shown on the plat of survey attached hereto on the reverse side of this notice.

The general course of the claim is from West to East.

The claim is situated in SECTION 22, T 5 N, R 14 W, G&SRB&M, ELLSWORTH MINING DISTRICT, Yuma County, Arizona.

The location of this claim is more particularly depicted on the plat of survey which is attached hereto on the reverse side hereof.

The location of the claim with reference to a permanent object is approximately 2 3/4 miles in a direction of Northwardly from the townsite of Hope, Arizona.

Dated 12 June, 1979, at Aguila, Arizona. Locator Michael C Sansone
 Michael C Sansone,

State of Arizona

CKET 801 PAGE 835

County Yuma }^{as}

I hereby certify that the within instrument was filed and recorded

on 1974 APR 2 AM 9 54

in Docket 801

at Page 835

at the request of Louis Dean

In witness whereof I have hereunto set my hand and seal.

Fee No.

6945

Compared

Photostated

Fee 2 00

When recorded mail to:

Mr. Louis Dean
P.O. Box 153
Salome, Ariz. 85348

CARA N. BETTS
County Recorder

Elizabeth Arrish
Deputy County Recorder

LOCATION NOTICE

Lode Mining Claim

This mining claim, the name of which is the CHARLENE #1
mining claim, was located by the undersigned LOUIS DEAN-ED JACKSON
CECIL SNIDER on the 30th day of MARCH 1974

This claim is 1500 feet long and 600 feet wide, and the point of discovery
is 150 feet from the south end and 1350 feet from
the NORTH end of this claim.

The general course of this claim is from SOUTHERNLY to NORTHERNLY

This claim is situated and located in the ELLSWORTH

Mining District, in YUMA County, State of Arizona, about 3 1/2 MILES
in a NORTHERNLY direction from VICKSBURG
AND ABOUT 1 MILE NORTH WESTERNLY OF DESERT
QUEEN MINE.

Dated and posted on the ground the day and year first above written.

Louis Dean
Edward Jackson
Cecil Snider
X X X X

Notice of Mining Location
LODE CLAIM

2

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the DEAN'S SNIDER SILVER BONANZO #2 Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by LOUIS E. DEAN - A CITIZEN OF THE UNITED STATES Cecil T. Snider - A CITIZEN OF THE UNITED STATES (Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.") the undersigned, on the 11th day of JUNE, 1974.

The length of this claim is 1500 feet and WE claim 1400 feet in a WESTERNLY direction and 500 feet in a EASTERNLY direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the EASTERNLY to the WESTERNLY.

The claim is situated and located in the ELLSWORTH Mining District, in YUMA county, in the State of Arizona, about 1 MILE in a WESTERNLY direction from DESERT QUEEN MINE 3 MILES NORTHERNLY FROM A POINT ABOUT 1 mile west of Vicksburg beginning at the west end of Dean's Snider Silver Bonanza mine #1.

The surface boundaries of the claim are marked upon the ground as follows:
Beginning at ROCK MONUMENT

at a point in a WESTERNLY direction 50 feet from the discovery shaft (at which this notice is posted), being in the center of the WESTERNLY end line of said claim; thence 300 feet to a ROCK MONUMENT, being the NORTH WESTERNLY corner of said claim; thence 1500 feet to a ROCK MONUMENT being at the NORTH EASTERNLY corner of said claim; thence 300 feet to a ROCK MONUMENT at the center of the EASTERNLY end of this claim; thence 300 feet to a ROCK MONUMENT, being at the SOUTH EASTERNLY corner of said claim; thence 1500 feet to a ROCK MONUMENT at the SOUTH WESTERNLY corner of said claim; thence 300 feet to the place of beginning.

Dated and posted on the ground this 11th day of JUNE, 1974

Pauline M. Hayes
Barbara B. Hayes

Witness

Louis E. Dean
Cecil T. Snider

Locator(s)

STATE OF ARIZONA
COUNTY OF Yuma ss.

11916

Witness my hand and official seal the day and year aforesaid.

I hereby certify that the within instrument was filed and recorded at request of Louis E. Dean

Lara N. Beth
County Recorder.

ON 1974 JUN 13 PM 1:17

By _____ Deputy Recorder.

at _____ M, Docket 811

Fee 209
9200

Indexed	Photostat Compared	Blotted

Page 853

Notice of Mining Location
LODE CLAIM

1

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the DEAN & SNIDER SILVER BONANZA Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by LOUIS E. DEAN - A CITIZEN OF THE UNITED STATES CECIL T. SNIDER - A CITIZEN OF THE UNITED STATES (Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.") the undersigned, on the 11th day of JUNE, 1974

The length of this claim is 1500 feet and WE claim 1400 feet in a WESTERNLY direction and 50 feet in a EASTERNLY direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the EASTERNLY to the WESTERNLY.

The claim is situated and located in the ELLSWORTH Mining District, in YUMA county, in the State of Arizona, about 1 MILE in a WESTERNLY direction from DESERT QUEEN MINE 3 MILES NORTHERNLY FROM A POINT ABOUT 1 MILE WEST OF VICKS BUA

The surface boundaries of the claim are marked upon the ground as follows:

Beginning at ROCK MONUMENT at a point in a WESTERNLY direction 50 feet from the discovery shaft (at which this notice is posted), being in the center of the WESTERNLY end line of said claim; thence 300 feet to a PACK MONUMENT, being the NORTH WESTERNLY corner of said claim; thence 1500 feet to a ROCK MONUMENT being at the NORTH EASTERNLY corner of said claim; thence 300 feet to a ROCK MONUMENT at the center of the EASTERNLY end of this claim; thence 300 feet to a ROCK MONUMENT, being at the SOUTH EASTERNLY corner of said claim; thence 1500 feet to a ROCK MONUMENT at the SOUTH WESTERNLY corner of said claim; thence 300 feet to the place of beginning.

Dated and posted on the ground this 11th day of JUNE, 1974.
Pauline M. Hanger Louis E. Dean
Harold B. Davis Cecil T. Snider
Witness Locator(s)

STATE OF ARIZONA } ss. 11915

COUNTY OF Yuma
I hereby certify that the within instrument was filed and recorded at request of Louis Dean

Witness my hand and official seal the day and year aforesaid.

Carroll Betts
County Recorder.

on 1974 JUN 13 PM 1 17

By _____ Deputy Recorder.

at _____ M, Docket 811

Fee \$200

Indexed	Photostat Compared	Blotted
---------	--------------------	---------

Page 852 P.O. Box 183 - Salome Az. 85348

Notice of Mining Location LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the R. J. # 1
Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by John Brusco Salame Ar, Phone 859.3304

(Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.")
the undersigned, on the 28 day of Aug, 1978.

The length of this claim is 1500 feet and 1 claim 50 feet in a NORTH direction and 1450 feet in a SOUTH direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the NORTH to the SOUTH.

The claim is situated and located in the ELLSWORTH Mining District, in YUMA county, in the State of Arizona, about 4 MILES in a EASTERNLY direction from MC VAY CROSSING on Highway 72

The surface boundaries of the claim are marked upon the ground as follows:
Beginning at a POST
at a point in a NORTH direction 50 feet from the discovery shaft (at which this notice is posted), being in the center of the NORTH end line of said claim; thence 300 feet to a POST, being the NORTH WEST corner of said claim; thence 1500 feet to a POST being at the SOUTH WEST corner of said claim; thence 300 feet to a POST at the center of the SOUTH end of this claim; thence 300 feet to a POST, being at the SOUTH EAST corner of said claim; thence 1500 feet to a POST at the NORTH EAST corner of said claim; thence 300 feet to the place of beginning.

Dated and posted on the ground this 28 day of Aug, 1978.
[Signature] Witness John P. Brusco Locator(s)

STATE OF ARIZONA }
COUNTY OF Yuma } ss.

21172

Witness my hand and official seal the day and year aforesaid.

I hereby certify that the within instrument was filed and recorded at

[Signature]
County Recorder.

request of Nancy S. Lutz
1978 AUG 29 AM 10 24

By [Signature]
Deputy Recorder.

on M, Docket 1056



Indexed	Photostat Compared	Blotted
---------	--------------------	---------

Notice of Mining Location

LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the KOPPER KETTEL Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by ARTHUR R MORIN + MARY L MORIN

(Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.")
the undersigned, on the 9TH day of Jan, 1978

The length of this claim is 1500 feet and 600 claim 1000 feet in a NORTHERLY direction and 500 feet in a SOUTHERLY direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the NORTHERLY to the SOUTHERLY.

The claim is situated and located in the ELLWORTH Mining District, in YUMA county, in the State of Arizona, about 2 1/4 MILES in a EASTERLY direction from VICKSBURG

The surface boundaries of the claim are marked upon the ground as follows:
Beginning at DISCOVERY MONUMENT

at a point in a SOUTHERLY direction 500 feet from the discovery shaft (at which this notice is posted), being in the center of the SOUTHERLY

end line of said claim; thence 300 feet to a S.E MON, being the SOUTHEAST corner of said claim; thence 1500 feet to a MIN. being at the N.E corner of said claim; thence 300 feet to a MON. at the center of the NORTHERLY end of this claim; thence 300 feet to a MON., being at the N.W corner of said claim; thence 1500 feet to a MON at the SW corner of said claim; thence 300 feet to the place of beginning.

Dated and posted on the ground this 9TH day of Jan, 1978
Arthur R Morin Mary L Morin
Witness Arthur R Morin Locator(s)

STATE OF ARIZONA }
COUNTY OF Yuma } ss.

719

Witness my hand and official seal the day and year aforesaid.

I hereby certify that the within instrument was filed and recorded at request of Arthur R Morin



Charles G. Betts
County Recorder.

Book 1119 Quartzgate Az
on Jan 11 - 1978 at 11:30 A.M., Docket 1011

Deputy Recorder.

Indexed	Photostat Compared	Blotted
---------	--------------------	---------

Notice of Mining Location

LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the PANDORA'S BOX #1 Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by CHARLES E. WILLMORE AND BARRY LYNN SCHWINDT BOTH U.S. CITIZENS

(Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States.") the undersigned, on the 22nd day of APRIL, 1974

The length of this claim is 1500 feet and 1 1/2 claim 1300 feet in a NORTH direction and 200 feet in a SOUTH direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 300 feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the SOUTH to the NORTH

The claim is situated and located in the ELLSWORTH Mining District, in YUMA county, in the State of Arizona, about 1 3/4 MILES BY ROAD in a IN A NORTH direction from UNITED STATES GEOLOGICAL SURVEY BENCHMARK 102 D (ELEVATION 1472)

The surface boundaries of the claim are marked upon the ground as follows:

Beginning at SOUTH END LINE CENTER at a point in a SOUTH direction 200 feet from the discovery shaft (at which this notice is posted), being in the center of the SOUTH END LINE end line of said claim; thence EAST 300 feet to a MONUMENT being the SOUTHEAST corner of said claim; thence NORTH 1500 feet to a MONUMENT being at the NORTHEAST corner of said claim; thence WEST 300 feet to a MONUMENT at the center of the NORTH end of this claim; thence WEST 300 feet to a MONUMENT being at the NORTHWEST corner of said claim; thence SOUTH 1500 feet to a MONUMENT at the SOUTH WEST corner of said claim; thence EAST 300 feet to the place of beginning.

Dated and posted on the ground this 22th day of April, 1974
Charles E. Willmore
Barry Schwindt
Witness Locator(s)

STATE OF ARIZONA }
COUNTY OF Yuma } ss.
I hereby certify that the within instrument was filed and recorded at 7856 request of Charles E. Willmore 1974 APR 17 AM 9 30

Witness my hand and official seal the day and year aforesaid.
CARA N. BETTS
County Recorder.
By Elizabeth Arriola
Deputy Recorder.

on _____ at _____
M, Docket 803 Fee 2.00
Page 663


Indexed	Photostat Compared	Blotted
---------	--------------------	---------

315 Stanford St Albuquerque N.M. 87106

88741

PLAT OF ACM LODE CLAIMS


ELLSWORTH MINING DISTRICT, YUMA COUNTY, ARIZONA
ALL OF SECTIONS 14, 15, 22, & 23, AND PORTIONS OF SECTIONS 26 & 27
TOWNSHIP 5 NORTH - RANGE 14 WEST G&SRB&M

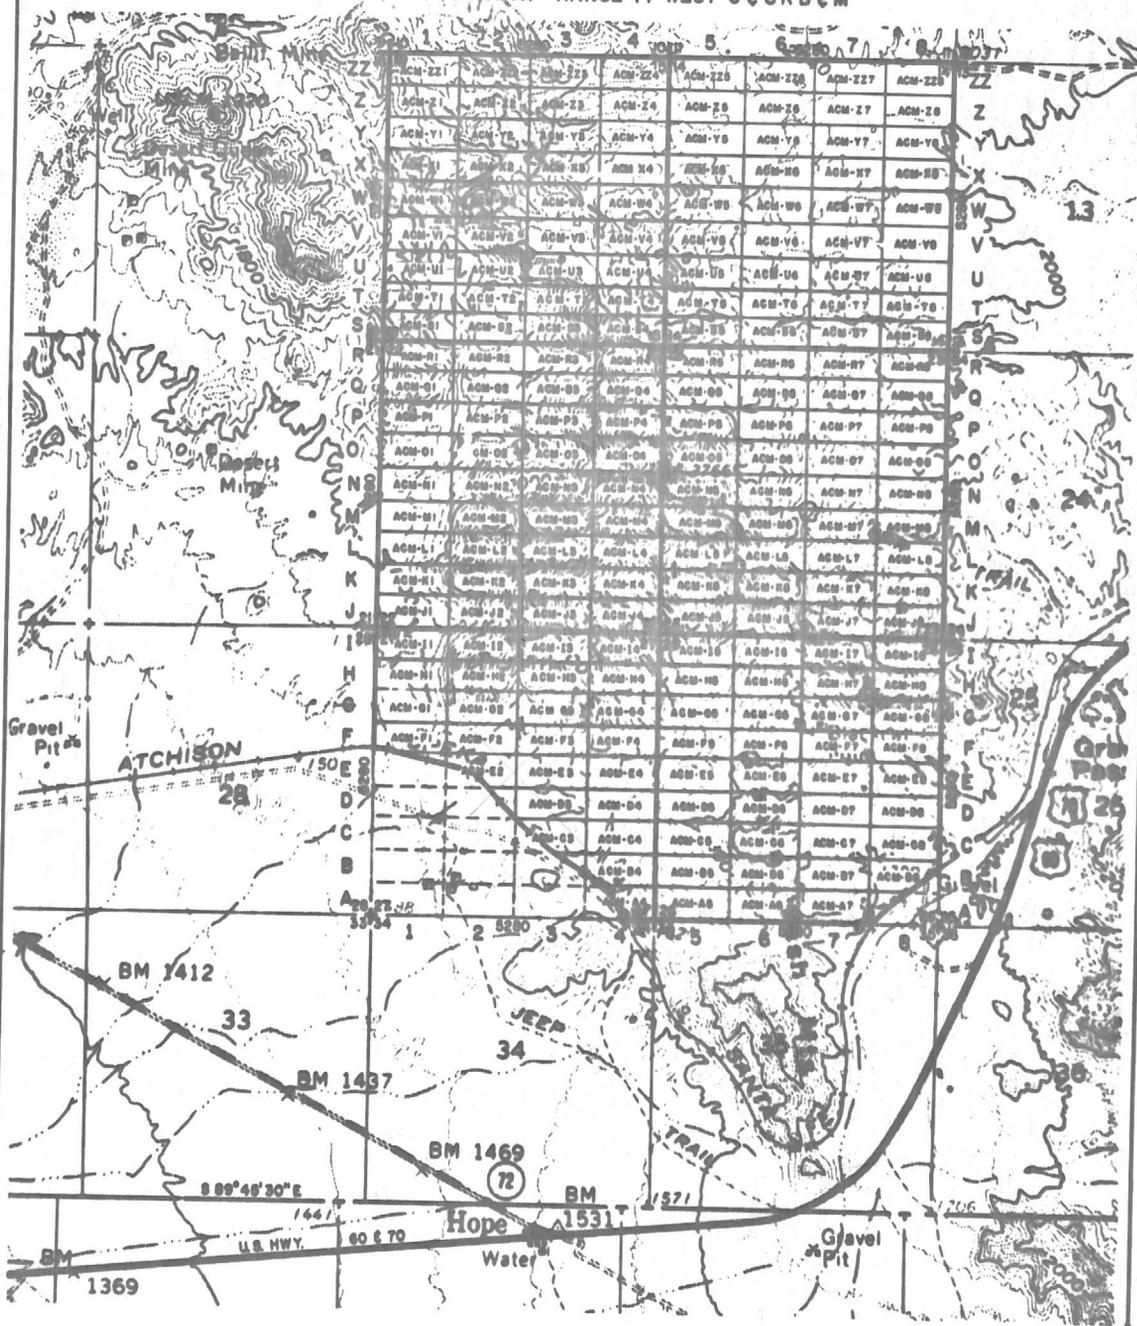

- CLAIMS ARE RECTANGLES 586' BY 1320' EXCEPTING THOSE CLAIMS SITUATED IN SECTIONS 26 & 27 WHICH ABUT EXISTING SANTA FE RAILROAD RIGHT OF WAY OF RECORD
- BASIS OF BEARINGS IS THE LINE COMMON TO SECTIONS 26 & 27 WHICH IS NORTH 00° 01' 15" EAST
- TYPE OF CORNER MONUMENT IS A STEEL FENCE POST

● SURVEY ORDERED BY AND MAP PREPARED FOR
MICHAEL C. SANSONE
P. O. BOX 11
AGUILA, ARIZONA. 86320

PREPARED BY
DESERT SURVEYORS, INC.
PARADISE VALLEY, ARIZONA.



For reservations at any Sheraton
anywhere, call free anytime:

800-325-3535

in Missouri: **800-392-3500**
Or have your travel agent call.

*If something
with value*

1. unknown lodes of places

Govt excluded common variety said & Govt
Gov't has right to control surface resources

gets gone

don't want to rely on tech, weather

1. Assessment work - for other than mining

2. Examine - Twp. status map
filed under

Bookell Mining Indian Spring 27

Arc 75777 82

Suzie Q.

75783 [84]

comply with



Sheraton

HOTELS & INNS, WORLDWIDE

Notice of Mining Location

LODE CLAIM

OCT 15 1979

Jan 15, 1978

10:00 A.M.

PHOENIX, ARIZONA

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the INDIAN SPRING #3

Mining Claim, situate on land belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purpose of exploration and purchase by

PAUL B. + THELMA M. GARDLOCK

BOTH U.S. CITIZENS

Locator must insert either "A Citizen of the United States," or "Who has declared his intention to become a Citizen of the United States."

the undersigned, on the 20TH day of MAY, 1976.

The length of this claim is 1500' feet and THIS claim is 750' feet in a NORTHERLY direction and 750' feet in a SOUTHERLY direction from the center of the discovery shaft, at which this notice is posted, lengthwise of the claim together with 300' feet in width of the surface grounds, on each side of the center of said claim. The general course of the lode deposit and premises is from the NORTH to the SOUTH.

The claim is situated and located in the ELLS WORTH Mining District, in YUMA county, in the State of Arizona, about 4 1/2 MILES

in a NORTHERLY direction from VICKSBURG, ARIZ. AND BORDERS ON THE WEST WITH GARDLOCKS INDIAN SPRING #2.

The surface boundaries of the claim are marked upon the ground as follows:

Beginning at A POST - NORTH END CENTER

at a point in a NORTHERLY direction 750 feet from the discovery shaft (at which this notice is posted), being in the center of the NORTH

end line of said claim; thence 300 feet to a POST NORTH EASTERLY corner of said claim;

thence 1500 feet to a POST SOUTH EASTERLY corner of said claim; thence 300 feet

to a POST at the center of the SOUTHERLY end of this claim; thence 300 feet to a POST

SOUTH WESTERLY corner of said claim; thence 1500 feet to a POST at the NORTH WESTERLY corner of said claim;

thence 300 feet to the place of beginning.

Dated and posted on the ground this 20TH day of MAY, 1976.

Paul B. Gardlock

Paul B. Gardlock




Witness BERNICE M. CONSIDINE

Locator(s) BERNICE M. CONSIDINE

STATE OF ARIZONA COUNTY OF YUMA ss.

My Commission Expires Dec 25, 1977. I hereby certify that the within instrument was filed and recorded at request of T. D. Gardlock 1976 JUN 14 AM 10 26

MICROFILMED 14322



County Recorder.

Deputy Recorder.

on M, Docket 916

Page 817

Indexed	Photostat Compared	Blotted
---------	--------------------	---------

RECEIVED
B.L.M. AZ STATE OFFICE

A 10 75733

TO: BUREAU OF LAND MANAGEMENT
ARIZONA STATE OFFICE
2400 VALLEY BANK CENTER
PHOENIX, ARIZONA 85073

OCT 15 1979

10:00 A.M.
PHOENIX, ARIZONA

ATTENTION: MINING CLAIM RECORDATION SECTION

THE FOLLOWING MINING CLAIM IS HEREBY FILED

BLM =

NAME OF CLAIM: INDIAN SPRINGS #3

RECORD DATA: *010-111 GILBERT COUNTY ARIZONA STATE*

LOCATION NOTICE: BOOK 916 PAGE 817
AMENDED NOTICE: BOOK PAGE

NAME OF OWNER:

GARDLOCK MINING CO.
530 W 37th STREET
SAN PEDRO, CALIFORNIA 90731

TYPE OF CLAIM: LODE LOCATION DATE: 5-20-1976

DESCRIPTION: *N60W4 1/2 SW1/4, Sec 9, T30N, R14W*

SEE MAP ATTACHED TO INDIAN SPRINGS #2

SUBMITTED BY: MINERAL RECORDS, INC.
45 EAST 400 SOUTH
SALT LAKE CITY, UTAH

84111

DATE: 10-1-1979

OCT 15 1979

10:00 A.M. **Affidavit of Labor Performed and
PHOENIX, ARIZONA Improvements Made**

STATE OF ARIZONA, }
County of YUMA } ss.

PAUL B. GARDLOCK being duly sworn, deposes and says that he is a citizen of the United States and more than twenty-one years of age, and resides at SALOME in YUMA County, State of Arizona, and is personally acquainted with the mining claims known as INDIAN SPRINGS 3 THRU 7

mining claims situate in ELLSWORTH Mining District, County of YUMA, State of Arizona, the location notice of which is recorded in the office of the County Recorder of said County, in Book 916 of Records of Mines, at page 817; that between the 15th day of MARCH, A. D. 1979, and the 15th day of MARCH, A. D. 1979, at least NINE HUNDRED

dollars worth of work and improvements were done and performed upon said claims, not including the location work of said claims. Such work and improvements were made by and at the expense of PAUL & THELMA GARDLOCK, P.O. Box # 435 SALOME ARIZ. 85348

owners of said claims for the purpose of complying with the laws of the United States pertaining to assessment of annual work, and PAUL B. GARDLOCK — PETE POTVIN P.O. Box # 313 WENDEN, ARIZ. 85357 V.C. CHADDOCK 2413 LOMITA BLVD, LOMITA CALIF.

were the men employed by said owners and who labored upon said claims, did said work and improvements, the same being as follows, to-wit: EXCAVATION & ROAD WORK FOR THE YEAR OF 1979 UP TO SEPT 15 1980.

Paul B. Gardlock
Thelma M. Gardlock

Subscribed and sworn to before me this 16th day of August A. D. 1979

(My commission expires 3/11/83)

[Signature]
Notary Public
OFFICIAL SEAL
DJ COMPARI

PAUL B. GARDLOCK
530 W 31st St

SAN PEDRO, CA 90731

R 14 W

RECEIVED
B.L.M. AZ STATE OFFICE

OCT 15 1979


10:00 A.M.
PHOENIX, ARIZONA

N ↑

T 5 N

A NC 75779

SCALE 1 INCH = 1000 FT

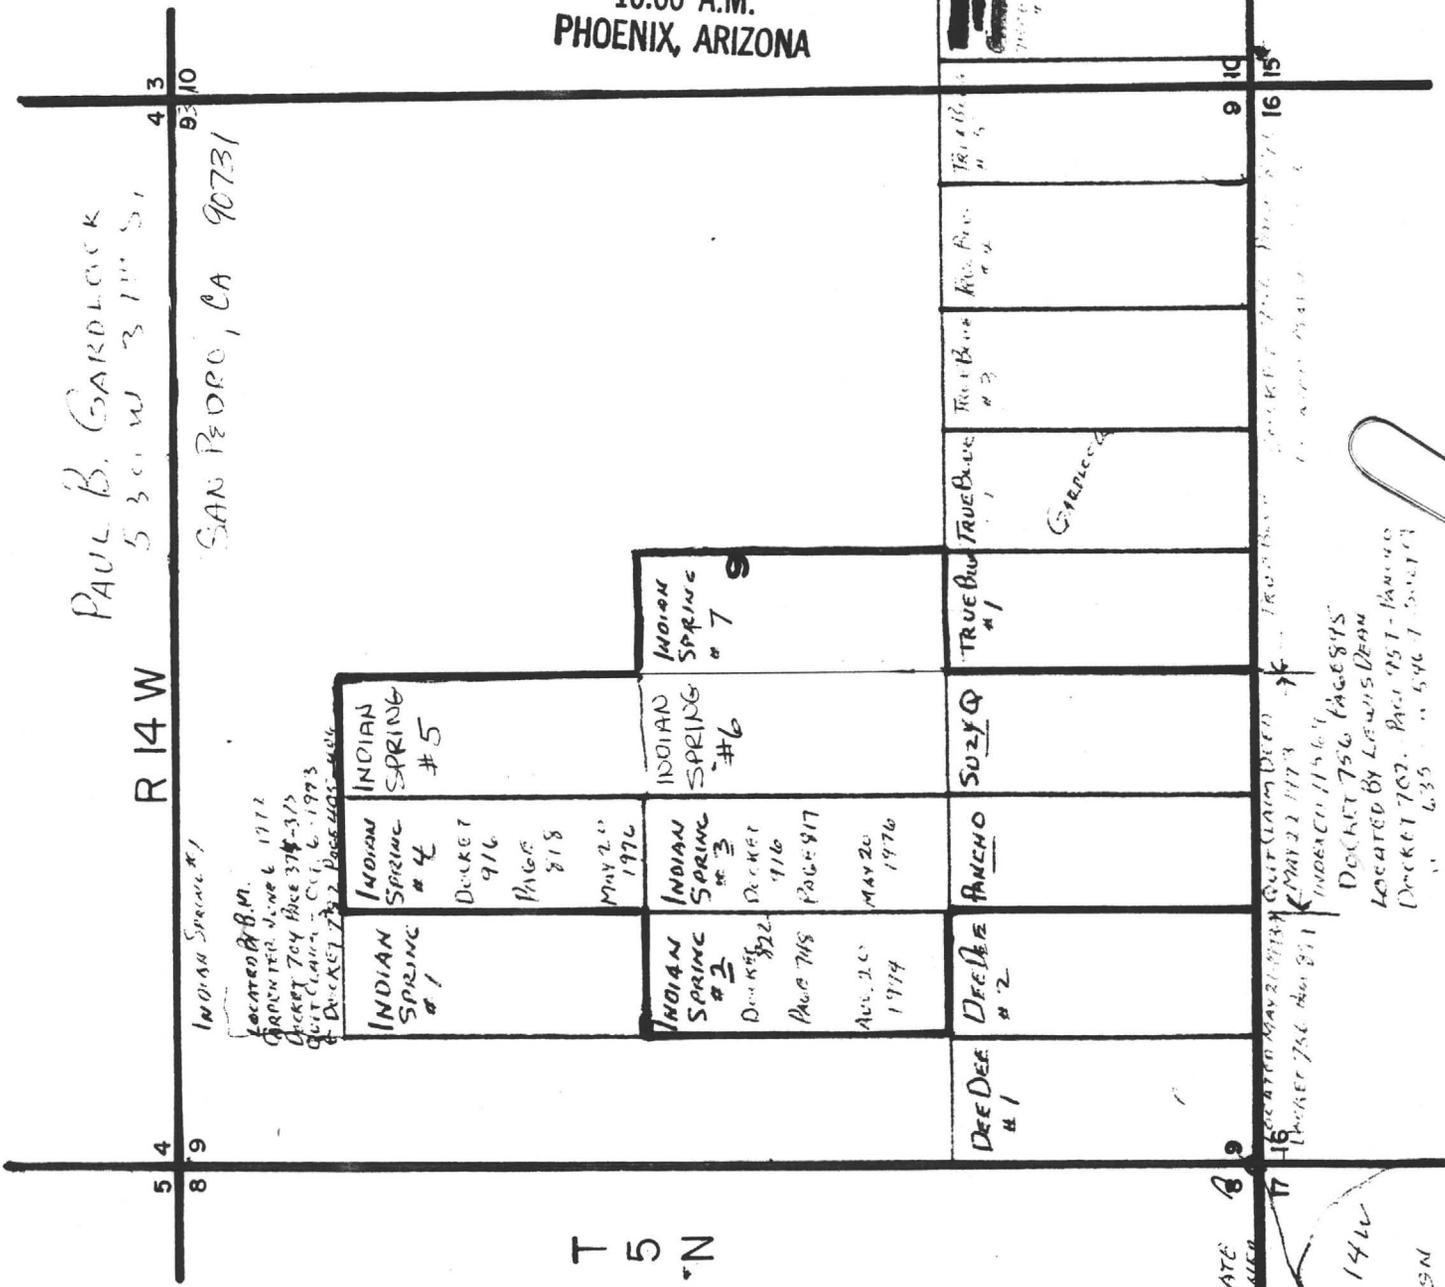

INDIAN SPRING #1
LOCATED B.M.
CORNERED June 6 1972
Docket 704 Page 374-375
QUIT CLAIM - Cal. 6-1973
Docket 707 Page 402-404

INDIAN SPRING #2
Docket 822
Page 745
AUG 20 1974

INDIAN SPRING #3
Docket 916
Page 818
MAY 20 1976

INDIAN SPRING #4
Docket 916
Page 818
MAY 20 1976

INDIAN SPRING #5
Docket 916
Page 818
MAY 20 1976

INDIAN SPRING #6
Docket 916
Page 818
MAY 20 1976

INDIAN SPRING #7
Docket 916
Page 818
MAY 20 1976


DREE DEE #1
LOCATED MAY 20 1974
Docket 704 Page 374-375
QUIT CLAIM - Cal. 6-1973
Docket 707 Page 402-404

DREE DEE #2
LOCATED MAY 20 1974
Docket 704 Page 374-375
QUIT CLAIM - Cal. 6-1973
Docket 707 Page 402-404


RANCHO
LOCATED BY LEWIS DEAN
Docket 707 Page 402-404
QUIT CLAIM - Cal. 6-1973
Docket 707 Page 402-404

TRUEBOW #1
TRUEBOW #2
TRUEBOW #3
TRUEBOW #4
TRUEBOW #5
TRUEBOW #6
TRUEBOW #7
TRUEBOW #8
TRUEBOW #9
TRUEBOW #10
TRUEBOW #11
TRUEBOW #12
TRUEBOW #13
TRUEBOW #14
TRUEBOW #15
TRUEBOW #16
TRUEBOW #17
TRUEBOW #18
TRUEBOW #19
TRUEBOW #20

THE GARDLOCK & GARDLOCK FIRM
1000 GARDLOCK BLVD
SAN PEDRO, CALIFORNIA 90731
A NOTARY PUBLIC
STATE OF CALIFORNIA
COMMISSION EXPIRES 12/31/79



RECEIVED AND FILED IN OFFICE

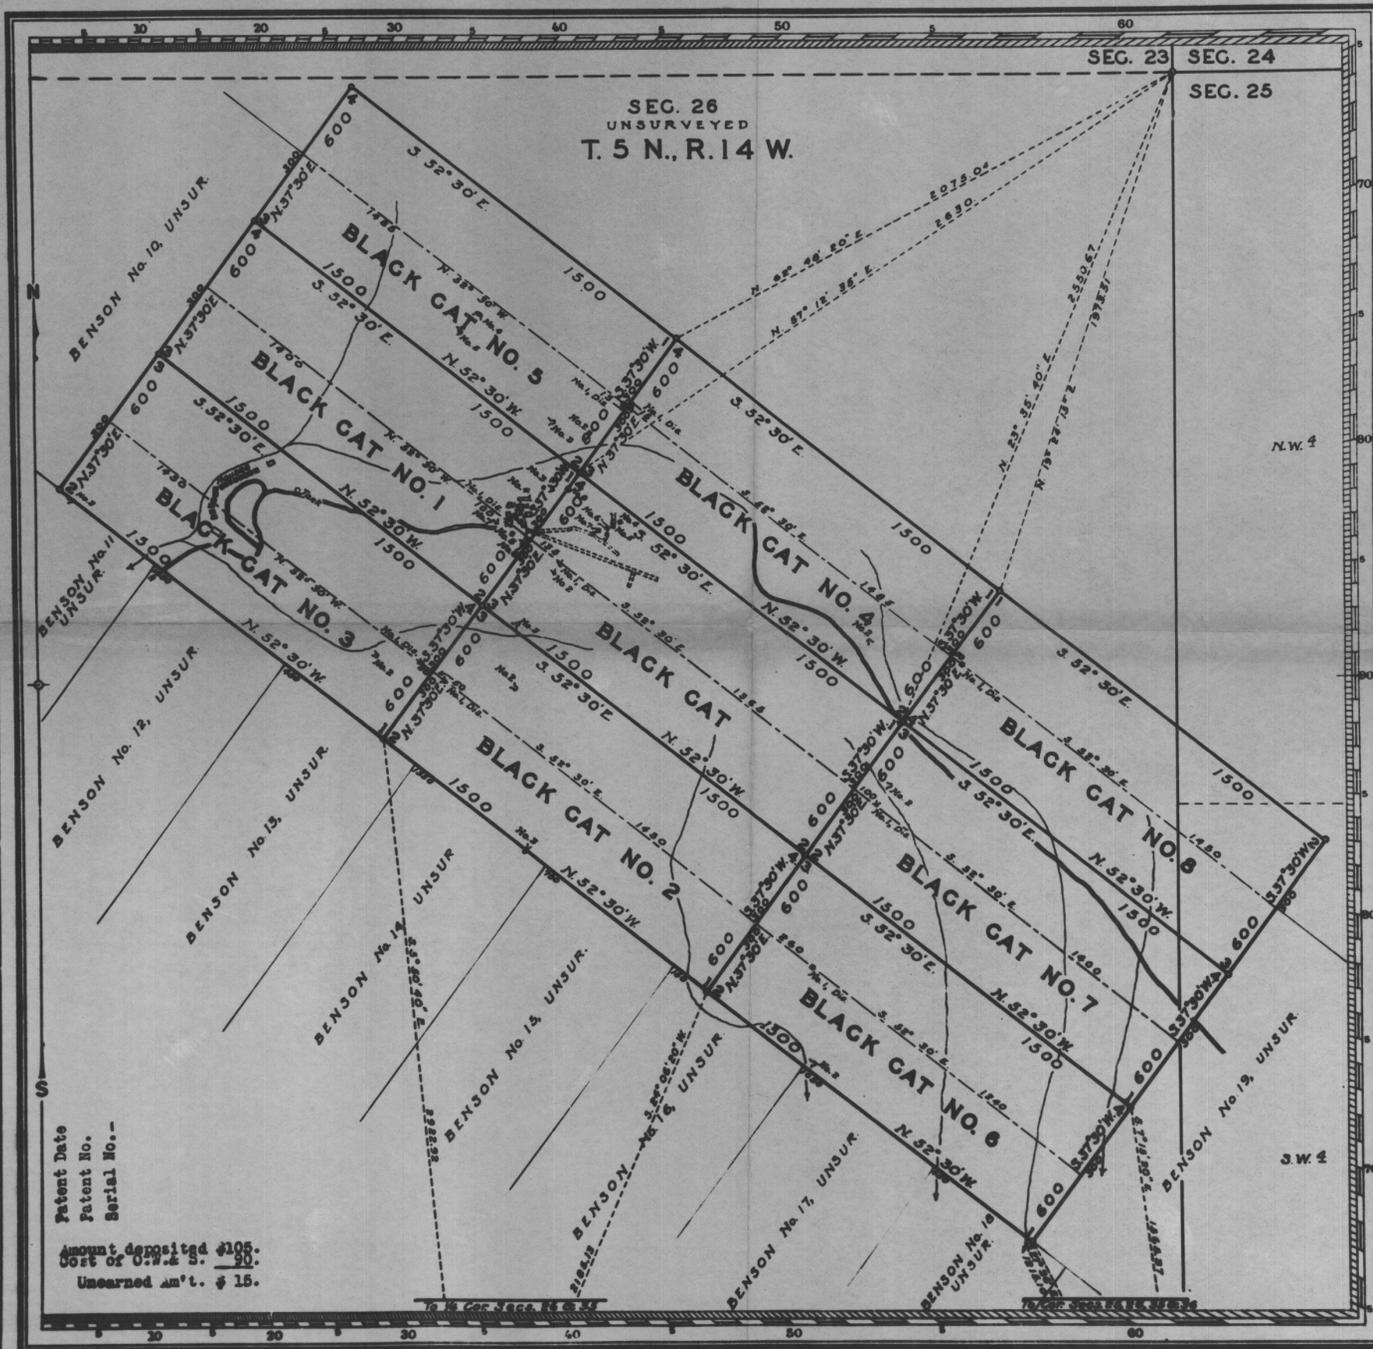

Patent Date
 Patent No.
 Serial No. -
 Amount deposited \$105.
 Offt of U.S. & S. - 20.
 Unearned amt. \$ 15.

Mineral Survey No. 4134

ARIZONA Land District.
PLAT
 OF THE CLAIM OF
 Britannia Gold Mines, Inc.

KNOWN AS THE
 BLACK CAT, BLACK CAT NO. 1, BLACK CAT NO. 2,
 BLACK CAT NO. 3, BLACK CAT NO. 4, BLACK CAT NO. 5,
 BLACK CAT NO. 6, BLACK CAT NO. 7, BLACK CAT NO. 8
 Lodes
 IN Ellsworth MINING DISTRICT,
 Yuma COUNTY, Arizona
 Containing an Area of 185.949 Acres.
 Scale of 400 Feet to the inch.
 Variation 15° 10' E.
 SURVEYED June 20 - 30 1930 BY
 Harry E. Jones
 U.S. Mineral Surveyor.

The Original Field Notes of the Survey of the Mining Claim from which this plat has been made under my direction, have been examined and approved, and are on file in this Office, and I hereby certify that they furnish such an accurate description of said Mining Claim as will, if incorporated into a patent, serve fully to identify the premises, and that such reference is made therein to natural objects or permanent monuments as will perpetuate and fix the locus thereof.
 I further certify that Five Hundred Dollars worth of labor has been expended or improvements made upon, or for the benefit of, each location embraced in said mining claim by claimant or its grantors and that said improvements consist of 15 shafts, 50 cuts, 4 tunnels and 1 crosscut, total value \$30,751.60, \$400 of which is reserved for claims not in this survey.

that the location of said improvements is correctly shown upon this plat, and that no portion of said labor or improvements has been included in the estimate of expenditures upon any other claim.
 And I further certify that this is a correct plat of said Mining Claim made in conformity with said original field notes of the survey thereof, and the same is hereby approved.

Public Survey Office
 Phoenix, Arizona
 September 22, 1930
 Phoenix, Arizona.
John Adams
 Office Cadastral Engineer