



ELECTRODES  
STATIONS  
Π INTERVAL BETWEEN  
SENDER & RECEIVER DIPOLES

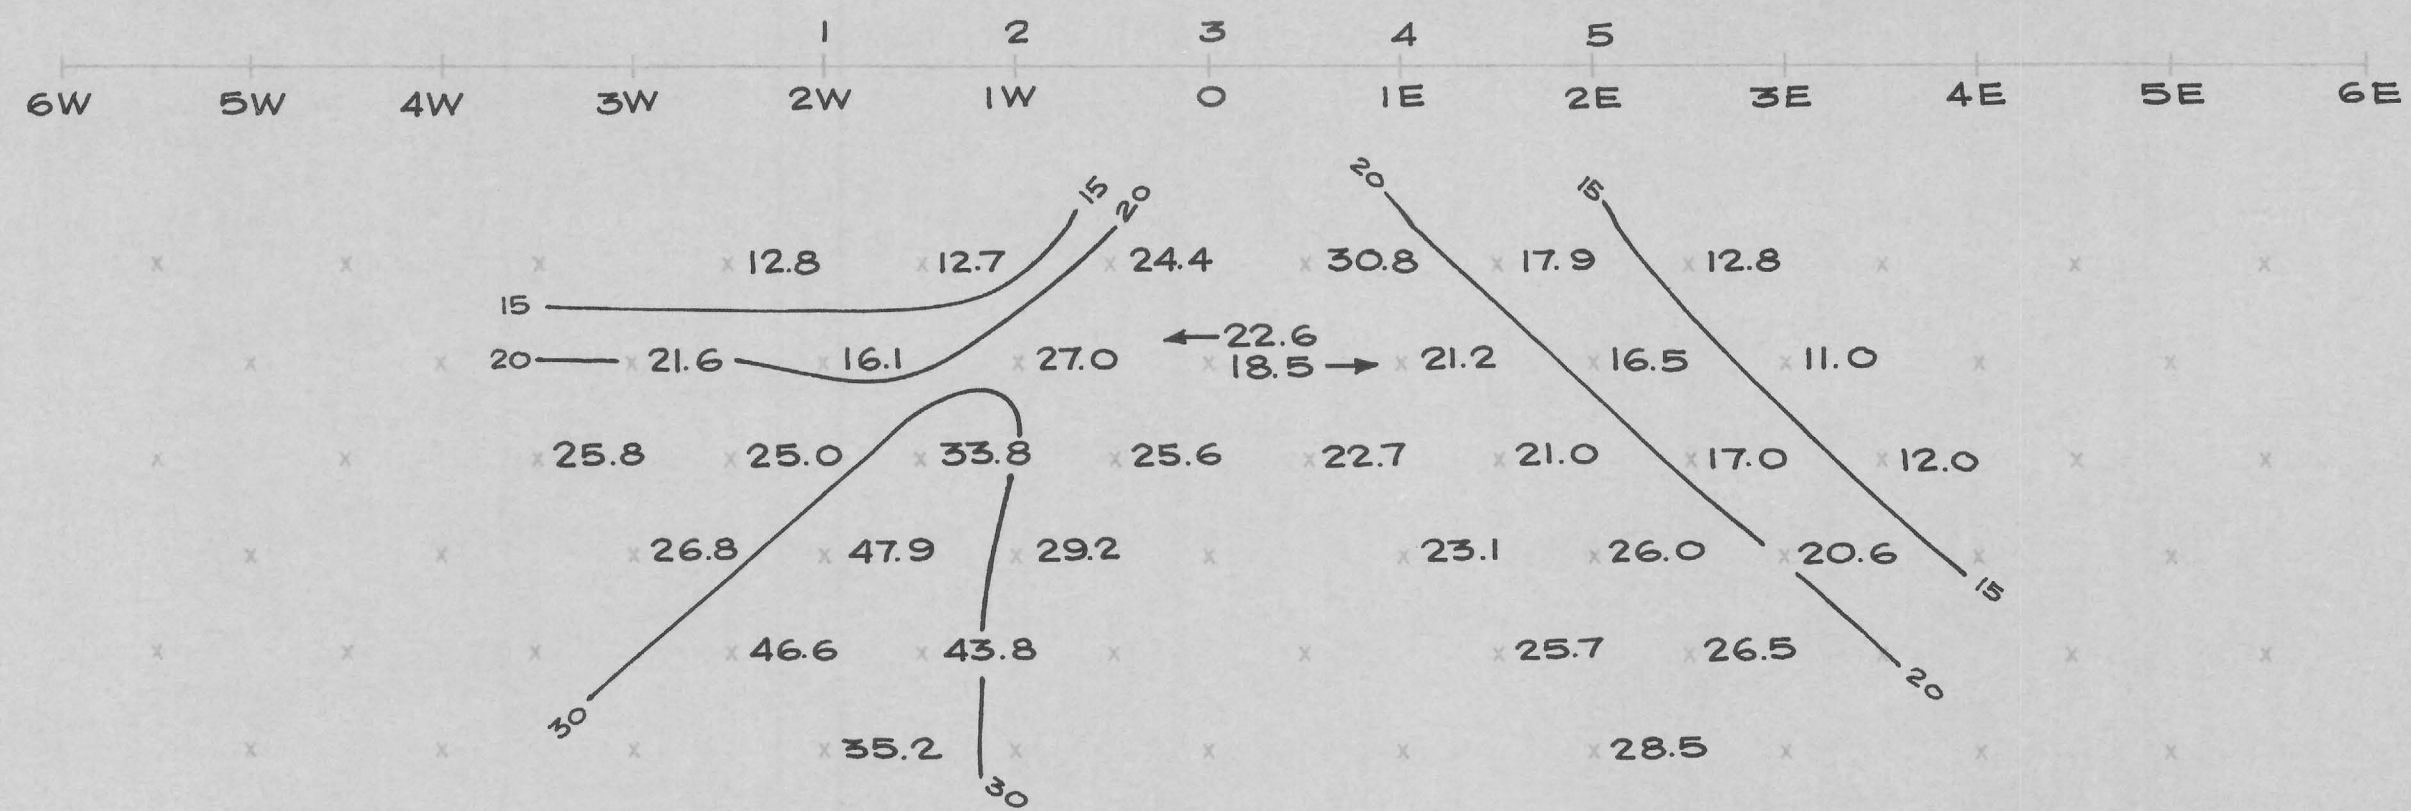

APPARENT RESISTIVITY (ρ<sub>a</sub>)  
IN UNITS OF OHM FEET  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY 305 cps


EXPLANATION

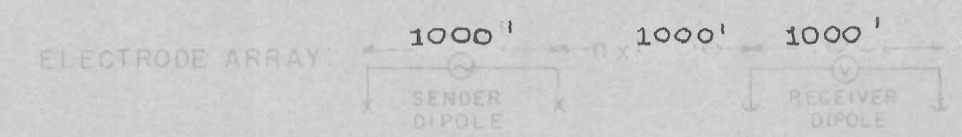

RELATIVE ANOMALY STRENGTH



LOOKING NORTH

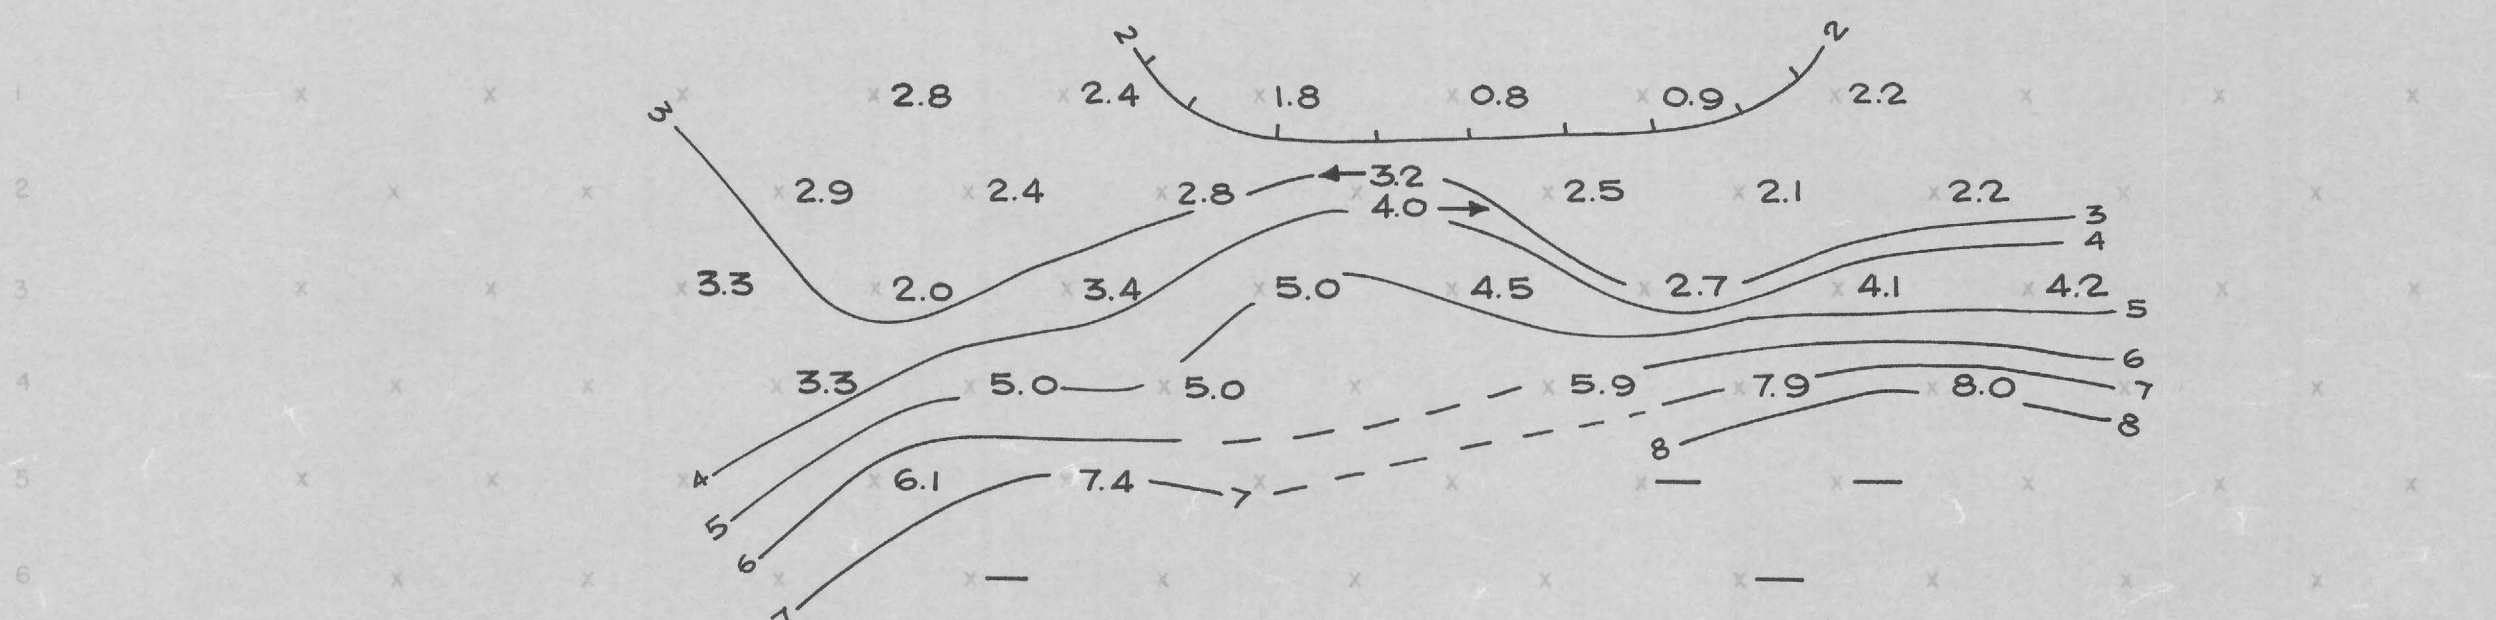

PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 IS 1.0 cps

DON-MATILDA CLAIM AREA  
MOHAVE COUNTY, ARIZ.

SECTIONAL DATA SHEET

LINE NO. 18

INDUCED POLARIZATION TRAVERSE


HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000'

DATE: MAY 1965

FOR

ARKLA EXPLORATION CO.

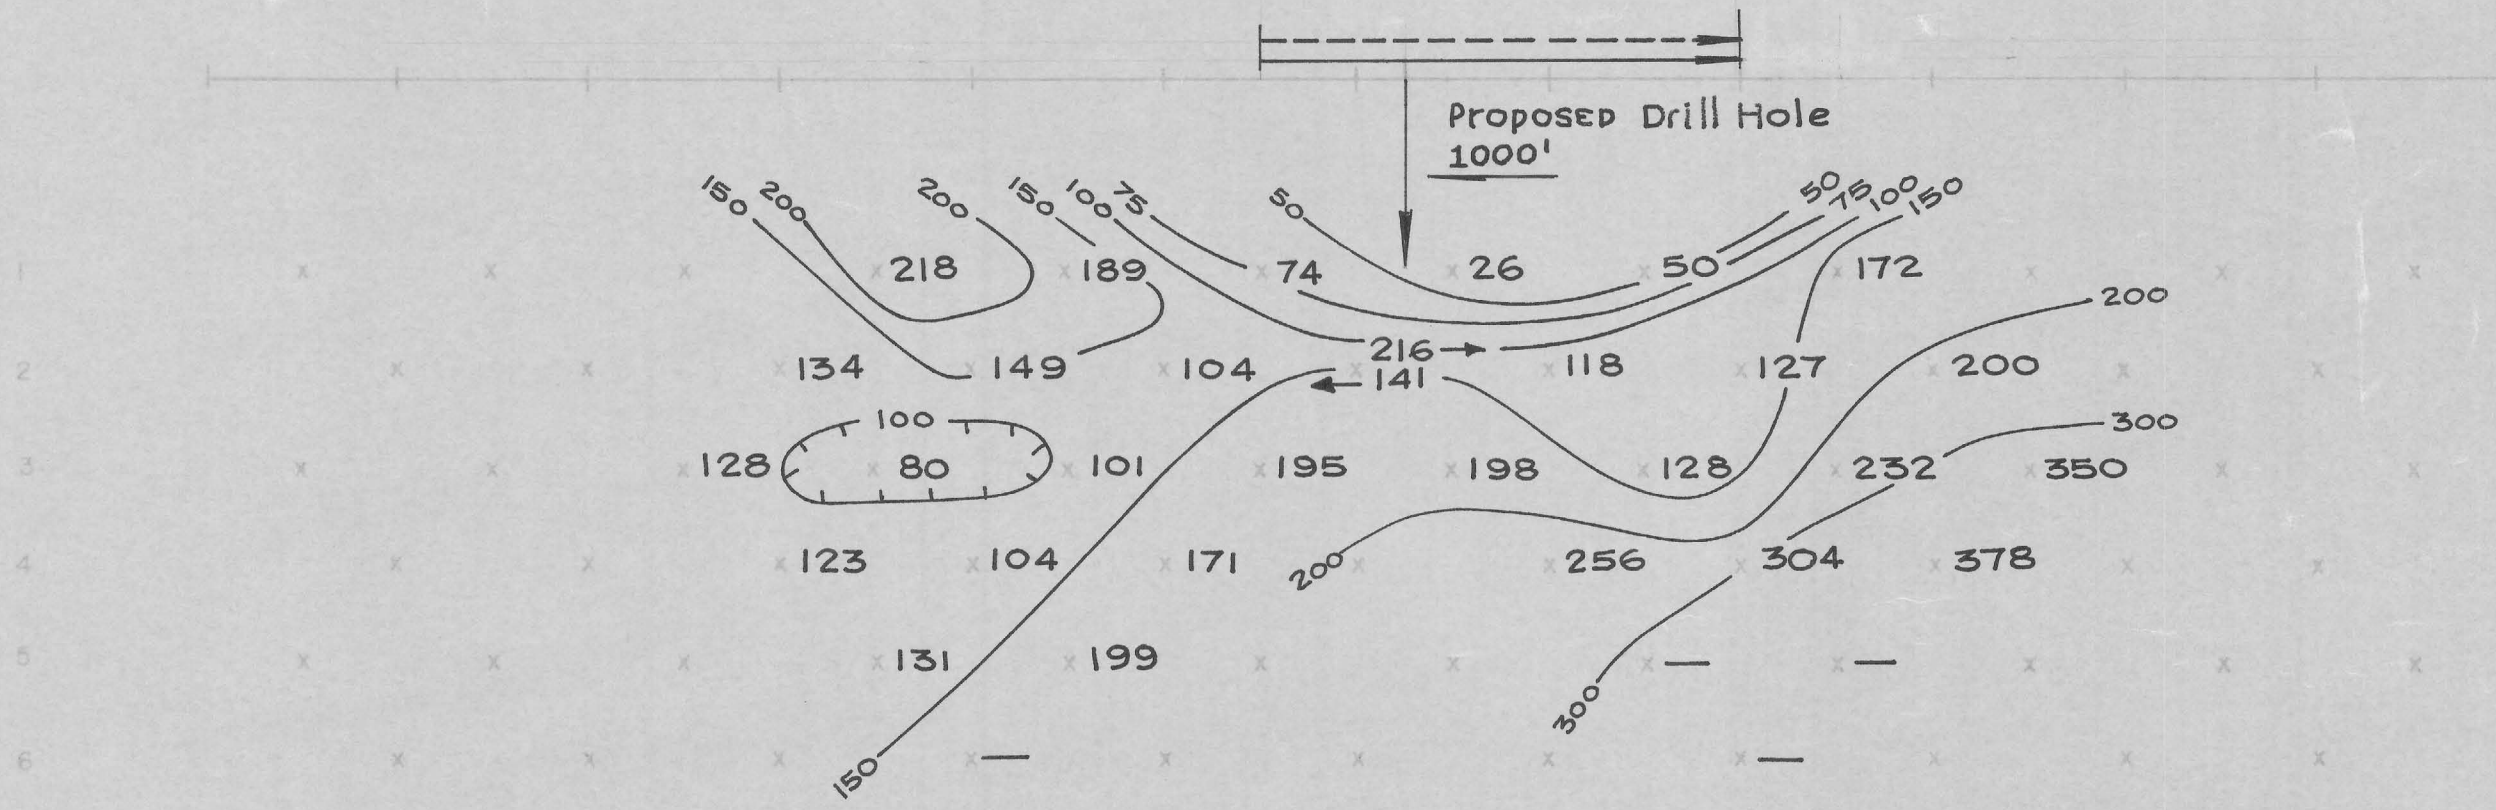

APPARENT METALLIC CONDUCTION FACTOR (MCF)  
(MCF = ρ<sub>a</sub> / (ρ<sub>a</sub> + 1000))  
CONTOUR INTERVAL LOGARITHMIC

Note: No. 5 electrode, Line 18 is 1500'  
south of No. 1 electrode sp. 1  
Line 17.