

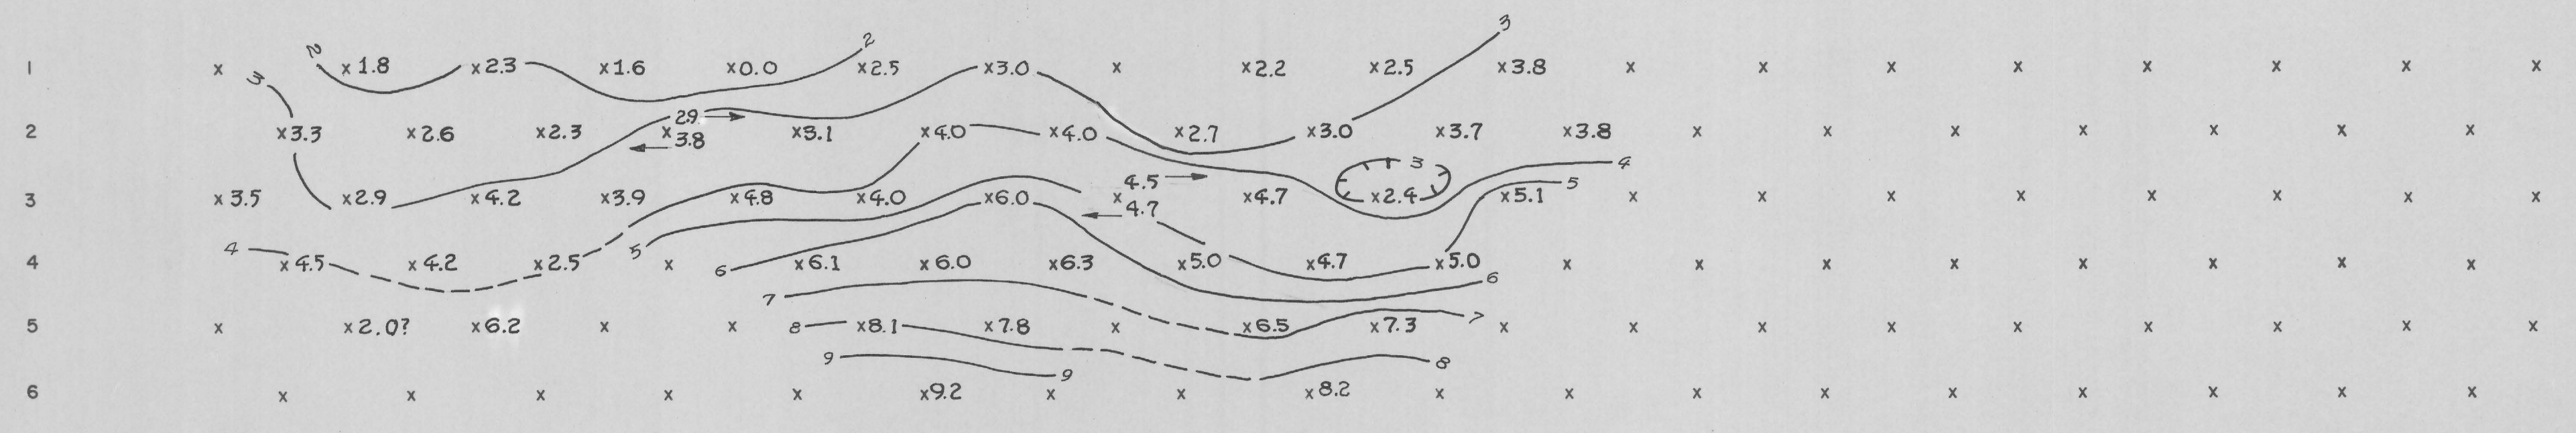
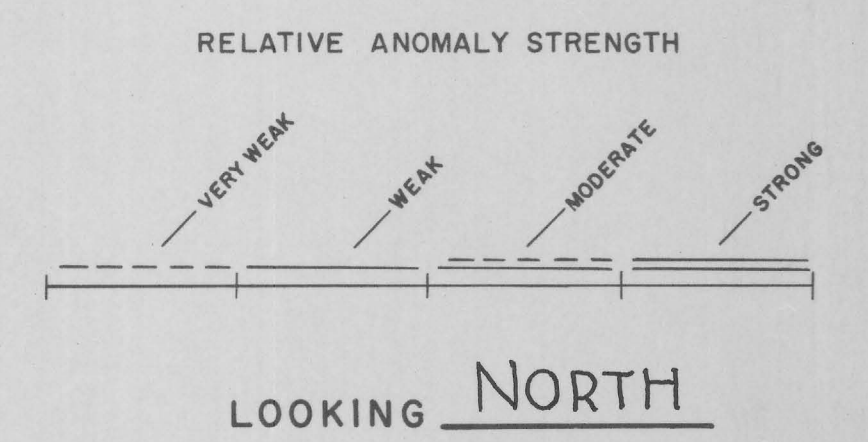


APPARENT RESISTIVITY (ρ_{DC})
 IN UNITS OF OHM FEET $\frac{1}{2\pi}$
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 c.p.s.

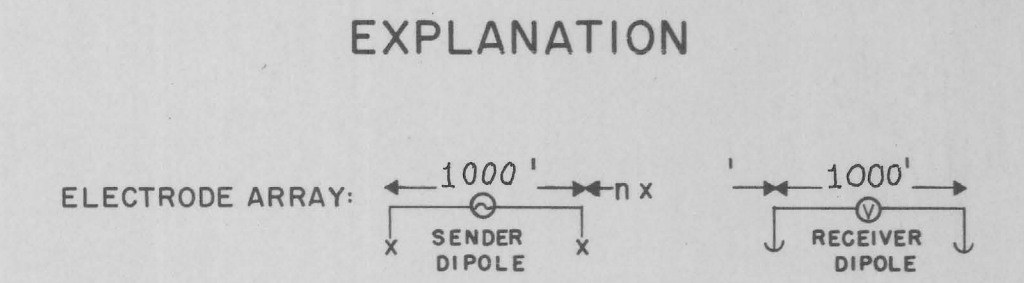

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 1.0 c.p.s.

DON MATILDA CLAIM AREA

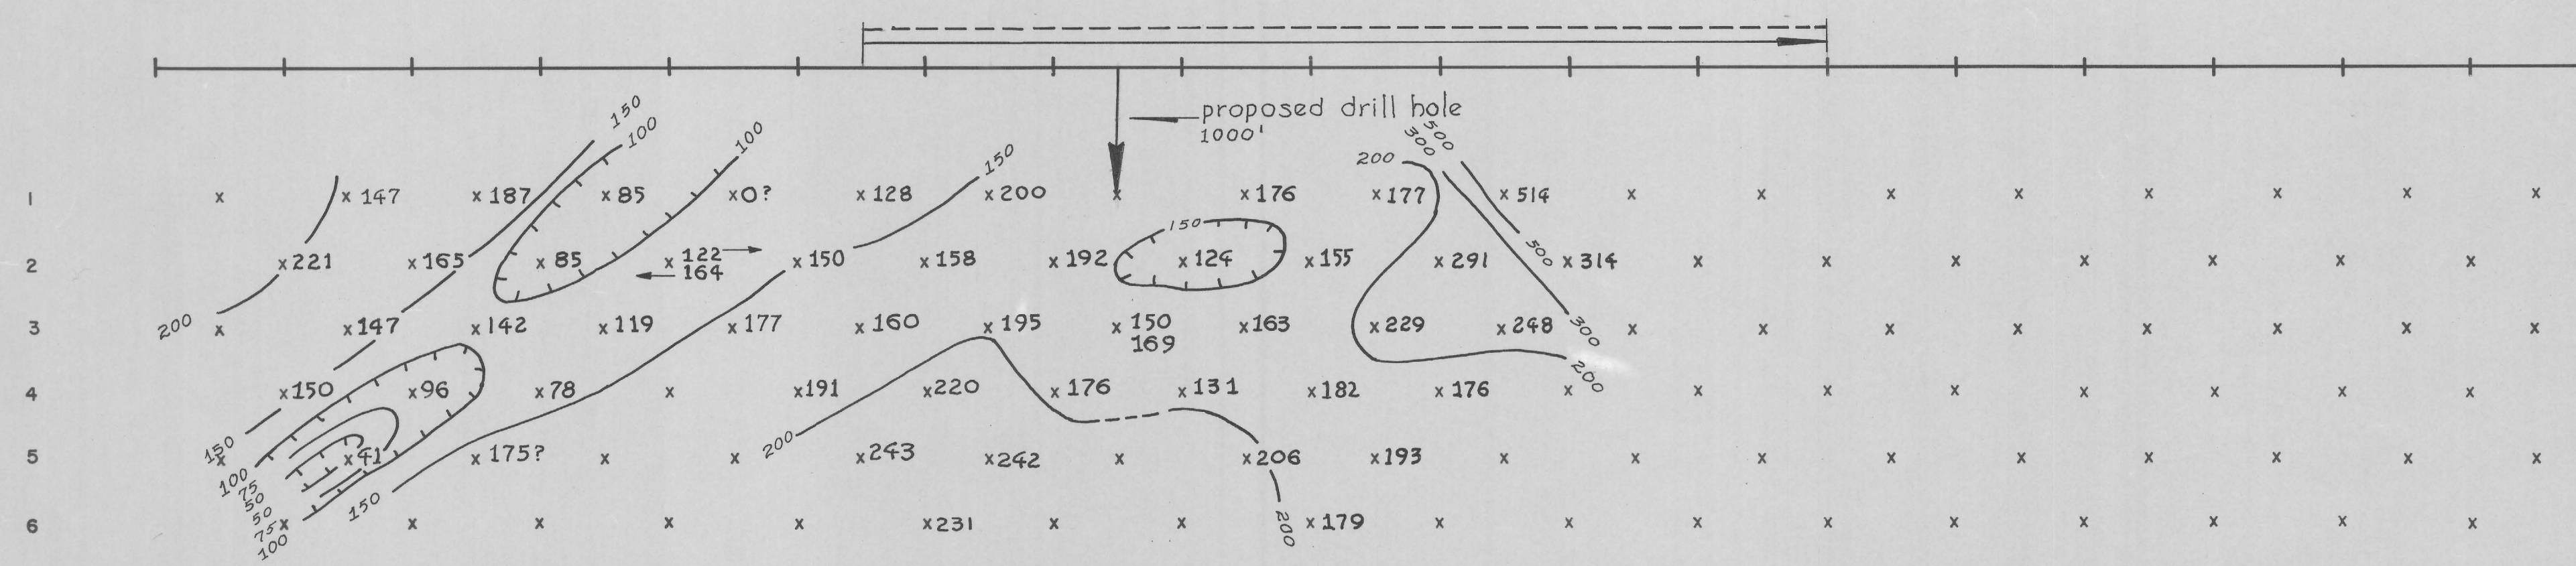

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 $(MCF = \frac{\rho_{DC}}{PFE \times 1000})$
 CONTOUR INTERVAL LOGARITHMIC

SECTIONAL DATA SHEET
 LINE NO. 17
 INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 1000' DATE: 5-4-65

FOR
 ARKLA EXPLORATION Co.

SELF POTENTIAL

NOTE: E 1/2 Line 17 repeated at 0.05 c.p.s. & 1 c.p.s. #1 and extended to 13 WEST at 0.05 c.p.s. & 1 c.p.s.
 NOTE: #2 No.5 electrode, line 18 is 1500' south of No.1 electrode spd. 1, Line 17.