
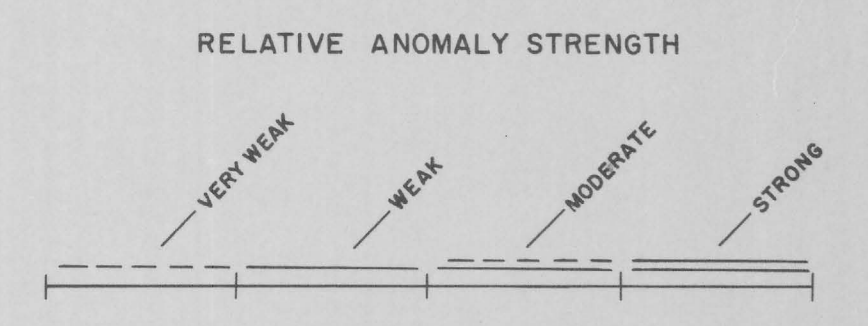


APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET 211'
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

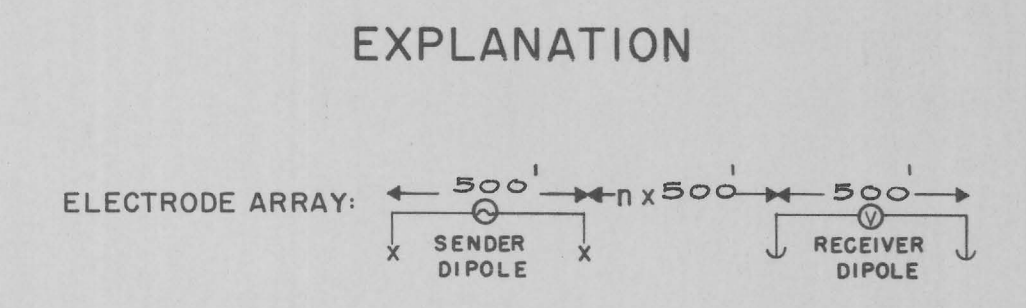

DON-MATILDA CLAIM AREA
MOHAVE COUNTY, ARIZ.

SECTIONAL DATA SHEET
LINE NO. 7
INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 500' DATE: NOV. 1964

FOR
ARKLA EXPLORATION CO.

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
($MCF = \frac{PFE \times 1000}{\rho_{DC}}$)
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

