
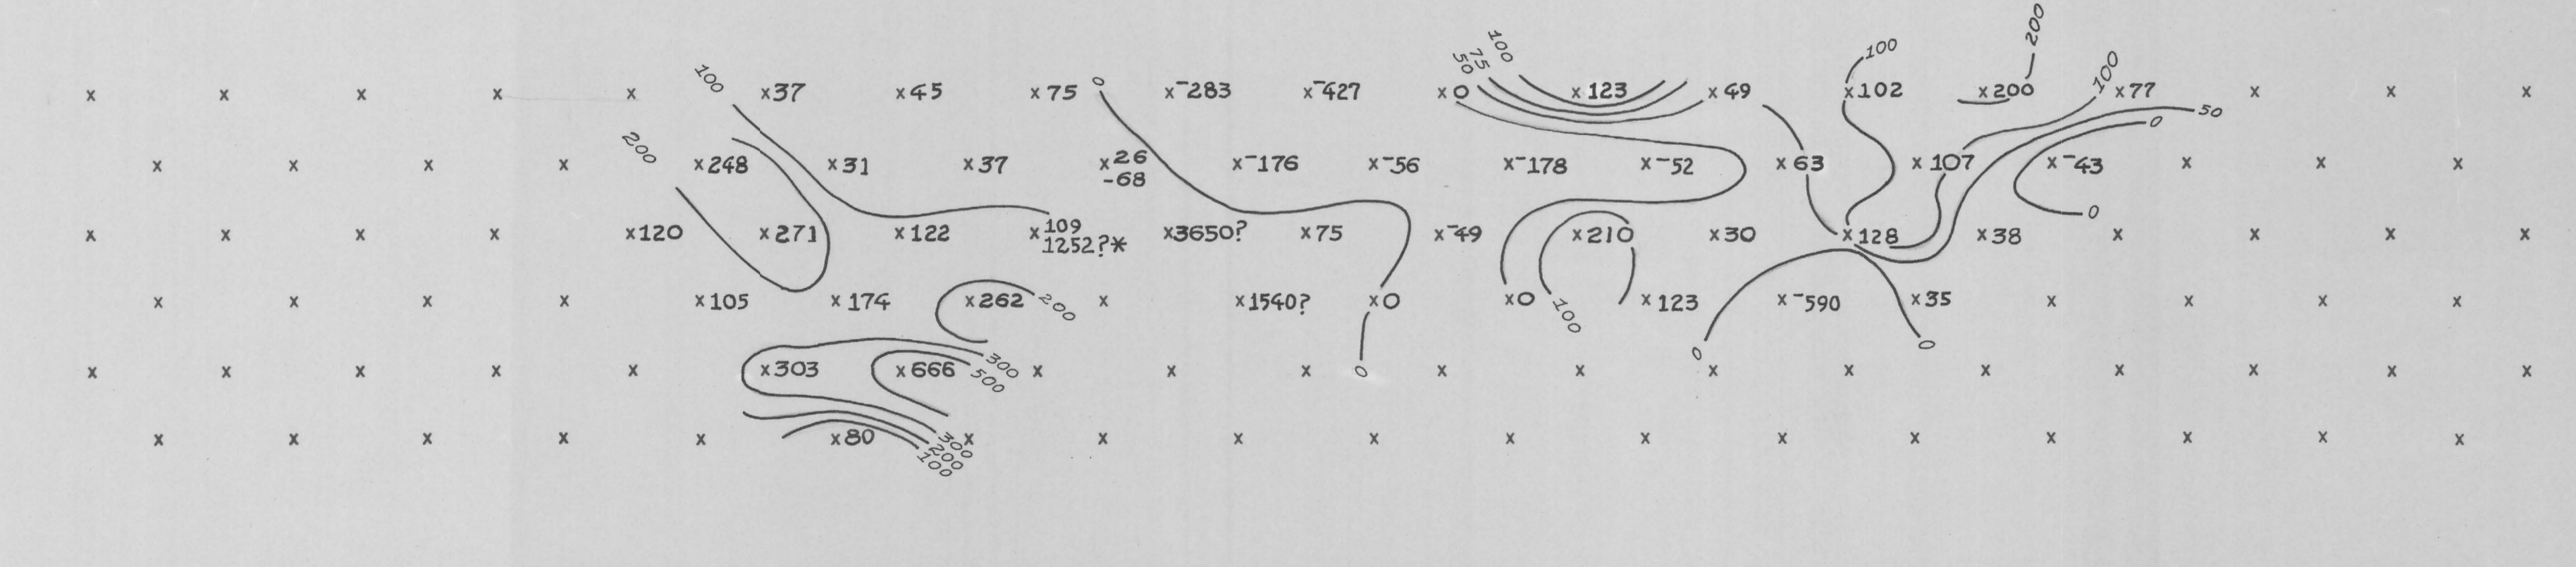
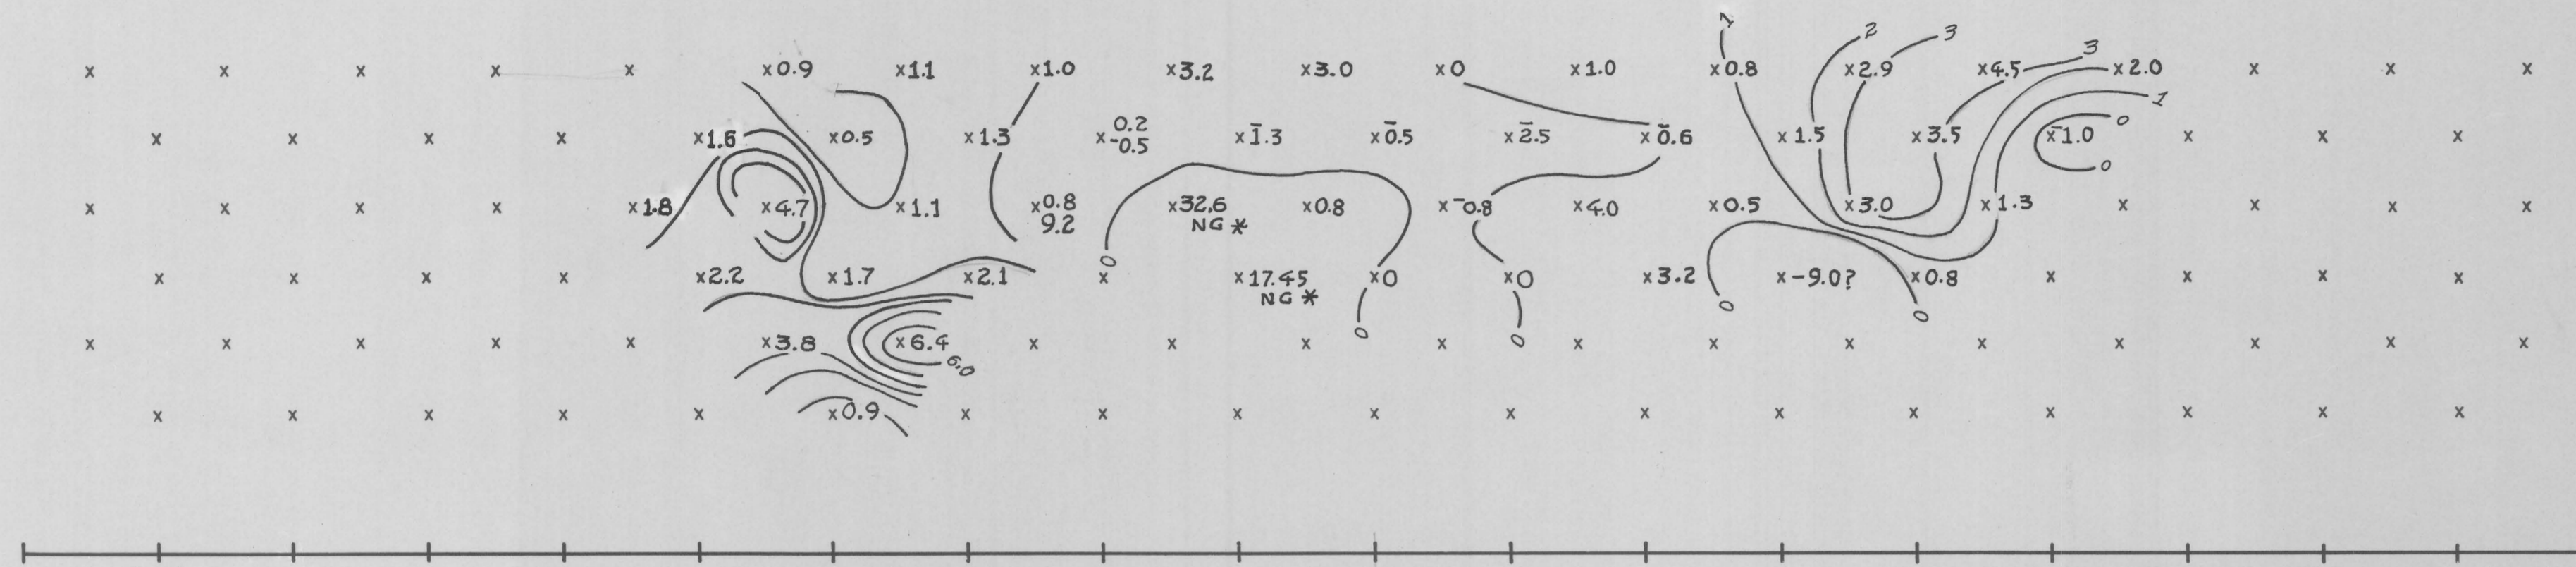


ELECTRODES STATIONS  
 n INTERVAL BETWEEN SENDER & RECEIVER DIPOLES

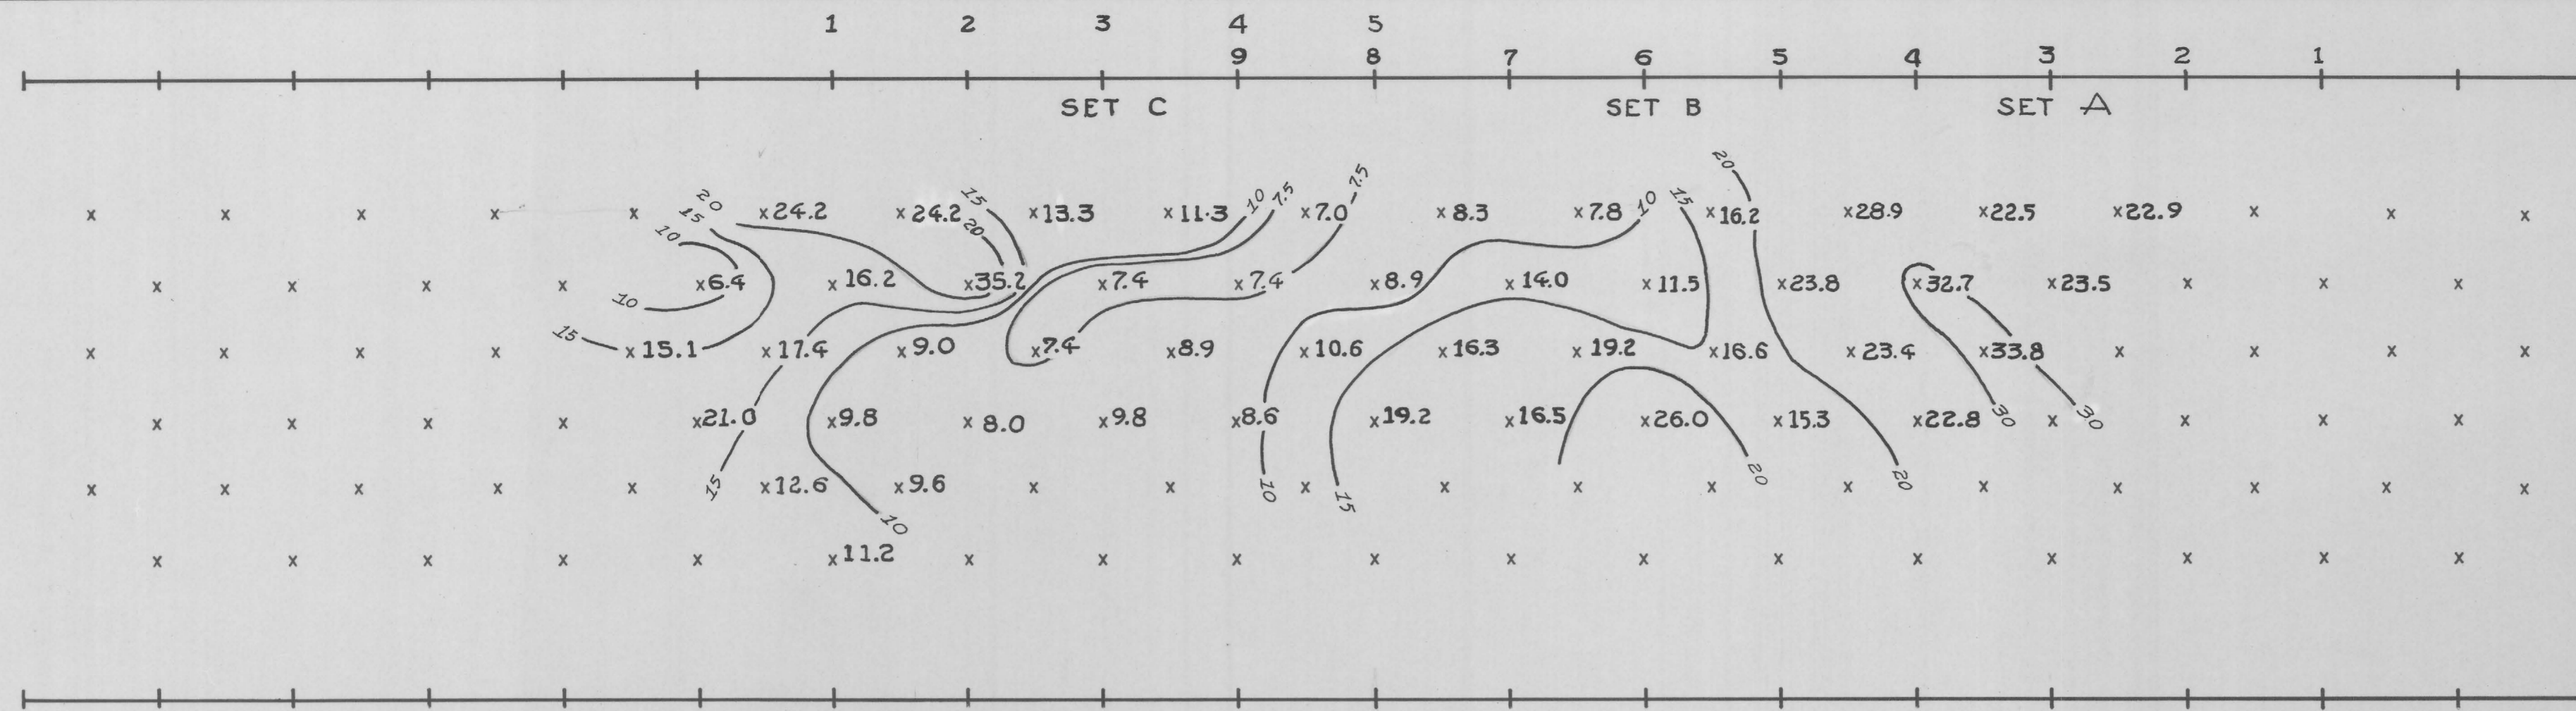


APPARENT RESISTIVITY (ρ<sub>DC</sub>)  
 IN UNITS OF OHM FEET 211  
 CONTOUR INTERVAL LOGARITHMIC  
 SENDER FREQUENCY: 0.05 c.p.s.

PERCENT FREQUENCY EFFECT (PFE)  
 CONTOUR INTERVAL CONSTANT  
 SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.


APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
 (MCF = PFE x 1000)  
 CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

EXPLANATION

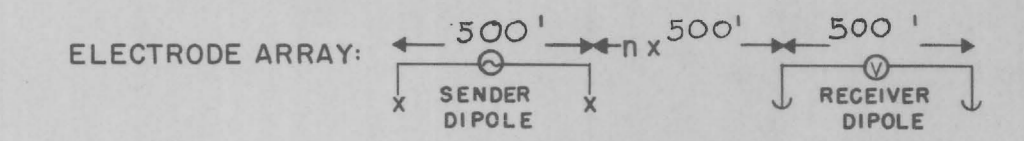

RELATIVE ANOMALY STRENGTH

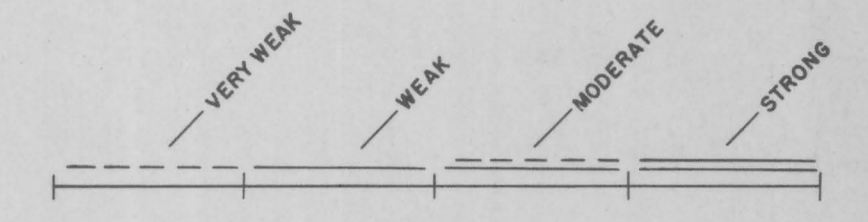

LOOKING WEST

DON MATILDA CLAIM AREA

SECTIONAL DATA SHEET  
 LINE NO. 5  
 INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY  
 SCALE: 1" = 500' DATE: 11-10-64

FOR  
 ARKLA EXPLORATION Co.