




INDUCED POLARIZATION TRAVERSE
SECTIONAL DATA SHEET
for
CITIES SERVICE MINERALS CORPORATION

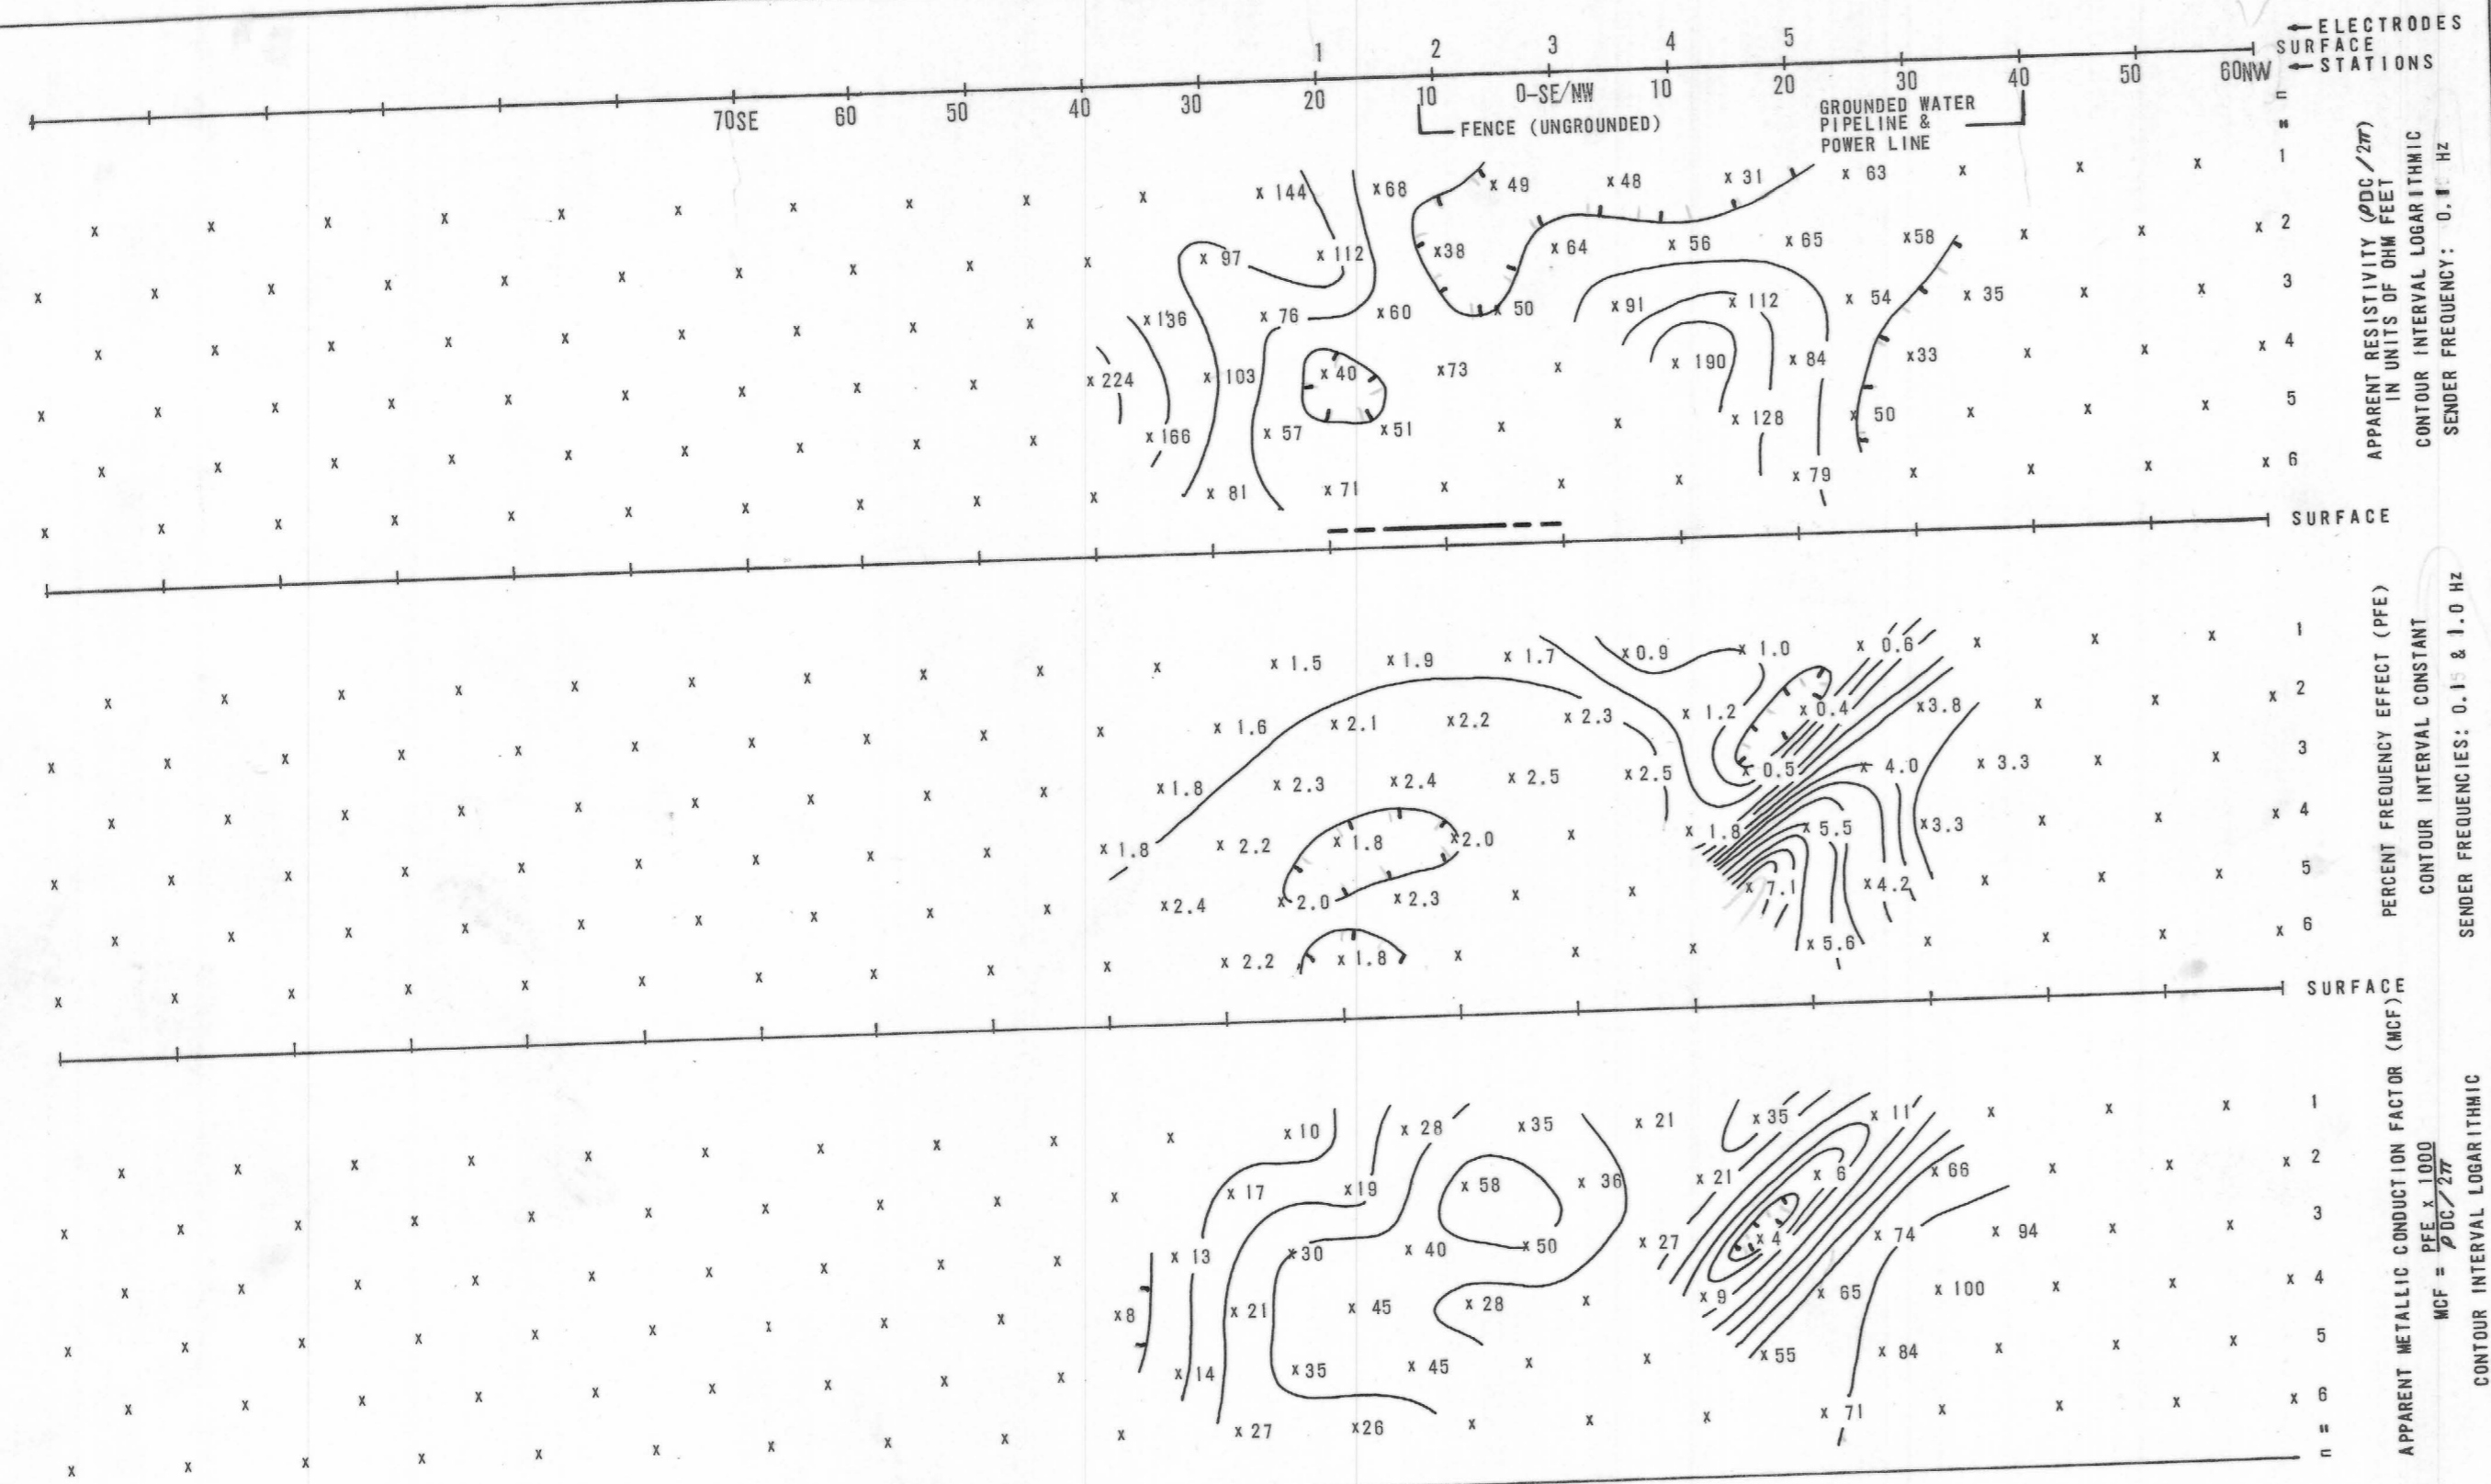


ELECTRODES SURFACE STATIONS
APPARENT RESISTIVITY (ρ_{DC}/2πr) IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.1 Hz

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.1 & 1.0 Hz

APPARENT METALLIC CONDUCTION FACTOR (MCF)
MCF = $\frac{PFE \times 1000}{\rho_{DC}/2\pi r}$
CONTOUR INTERVAL LOGARITHMIC

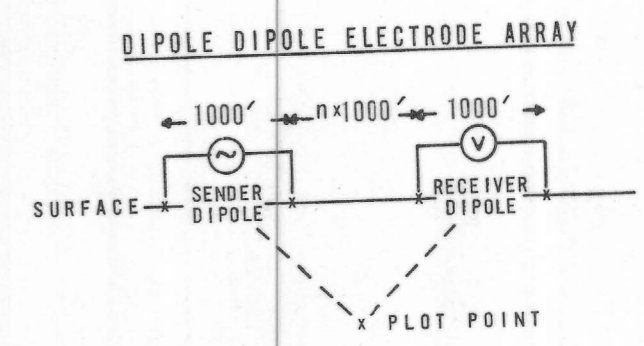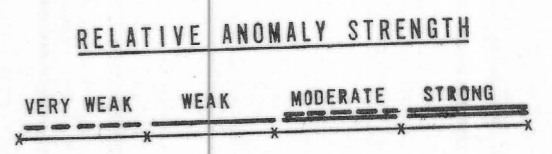

AREA
BAGDAD
LOOKING
S½ - S 77° W
N½ - S 56° W
DATE
DEC 1970
SCALE

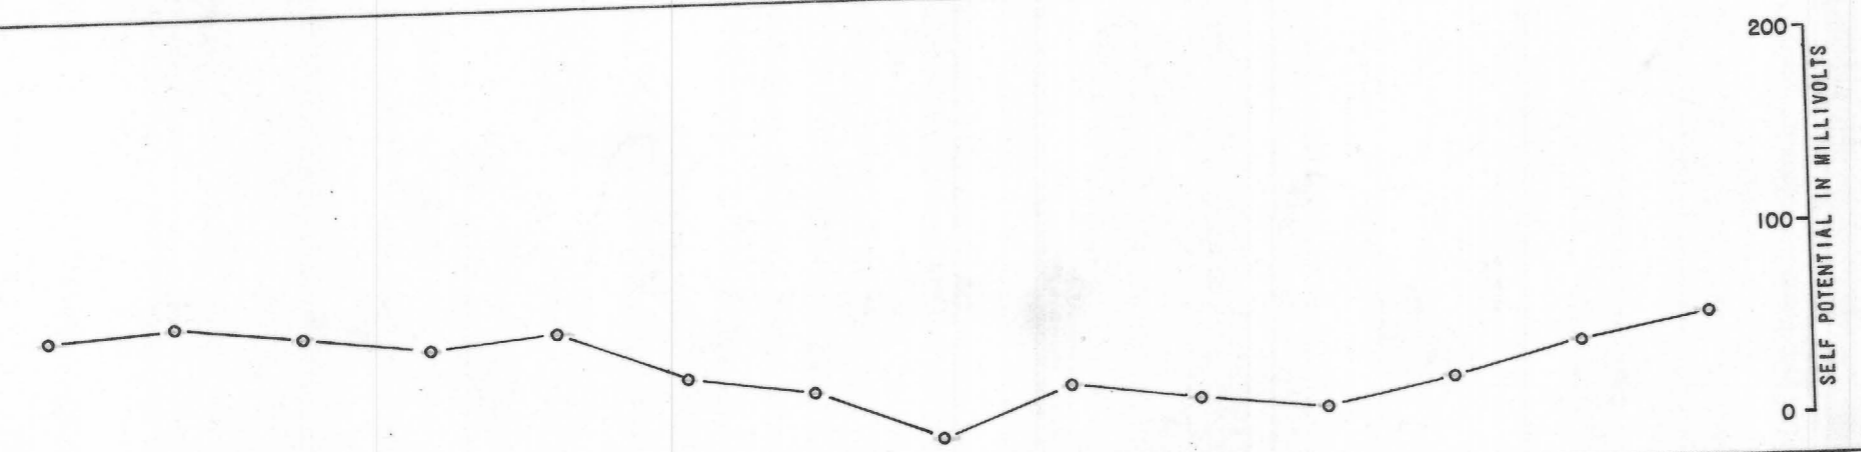

HEINRICHS
GEOEXPLORATION COMPANY
AUSTRALIA U.S.A.
(SYDNEY) Post Office Box 5964
39 Hume Street Tucson, Arizona 85703
GEOPHYSICAL Crows Nest, NSW Phone: (602) 623-0578
ENGINEERS Phone: 439-1793 Cable: GEOEX, Tucson