


INDUCED POLARIZATION TRAVERSE
SECTIONAL DATA SHEET
for
CITIES SERVICE MINERALS CORPORATION

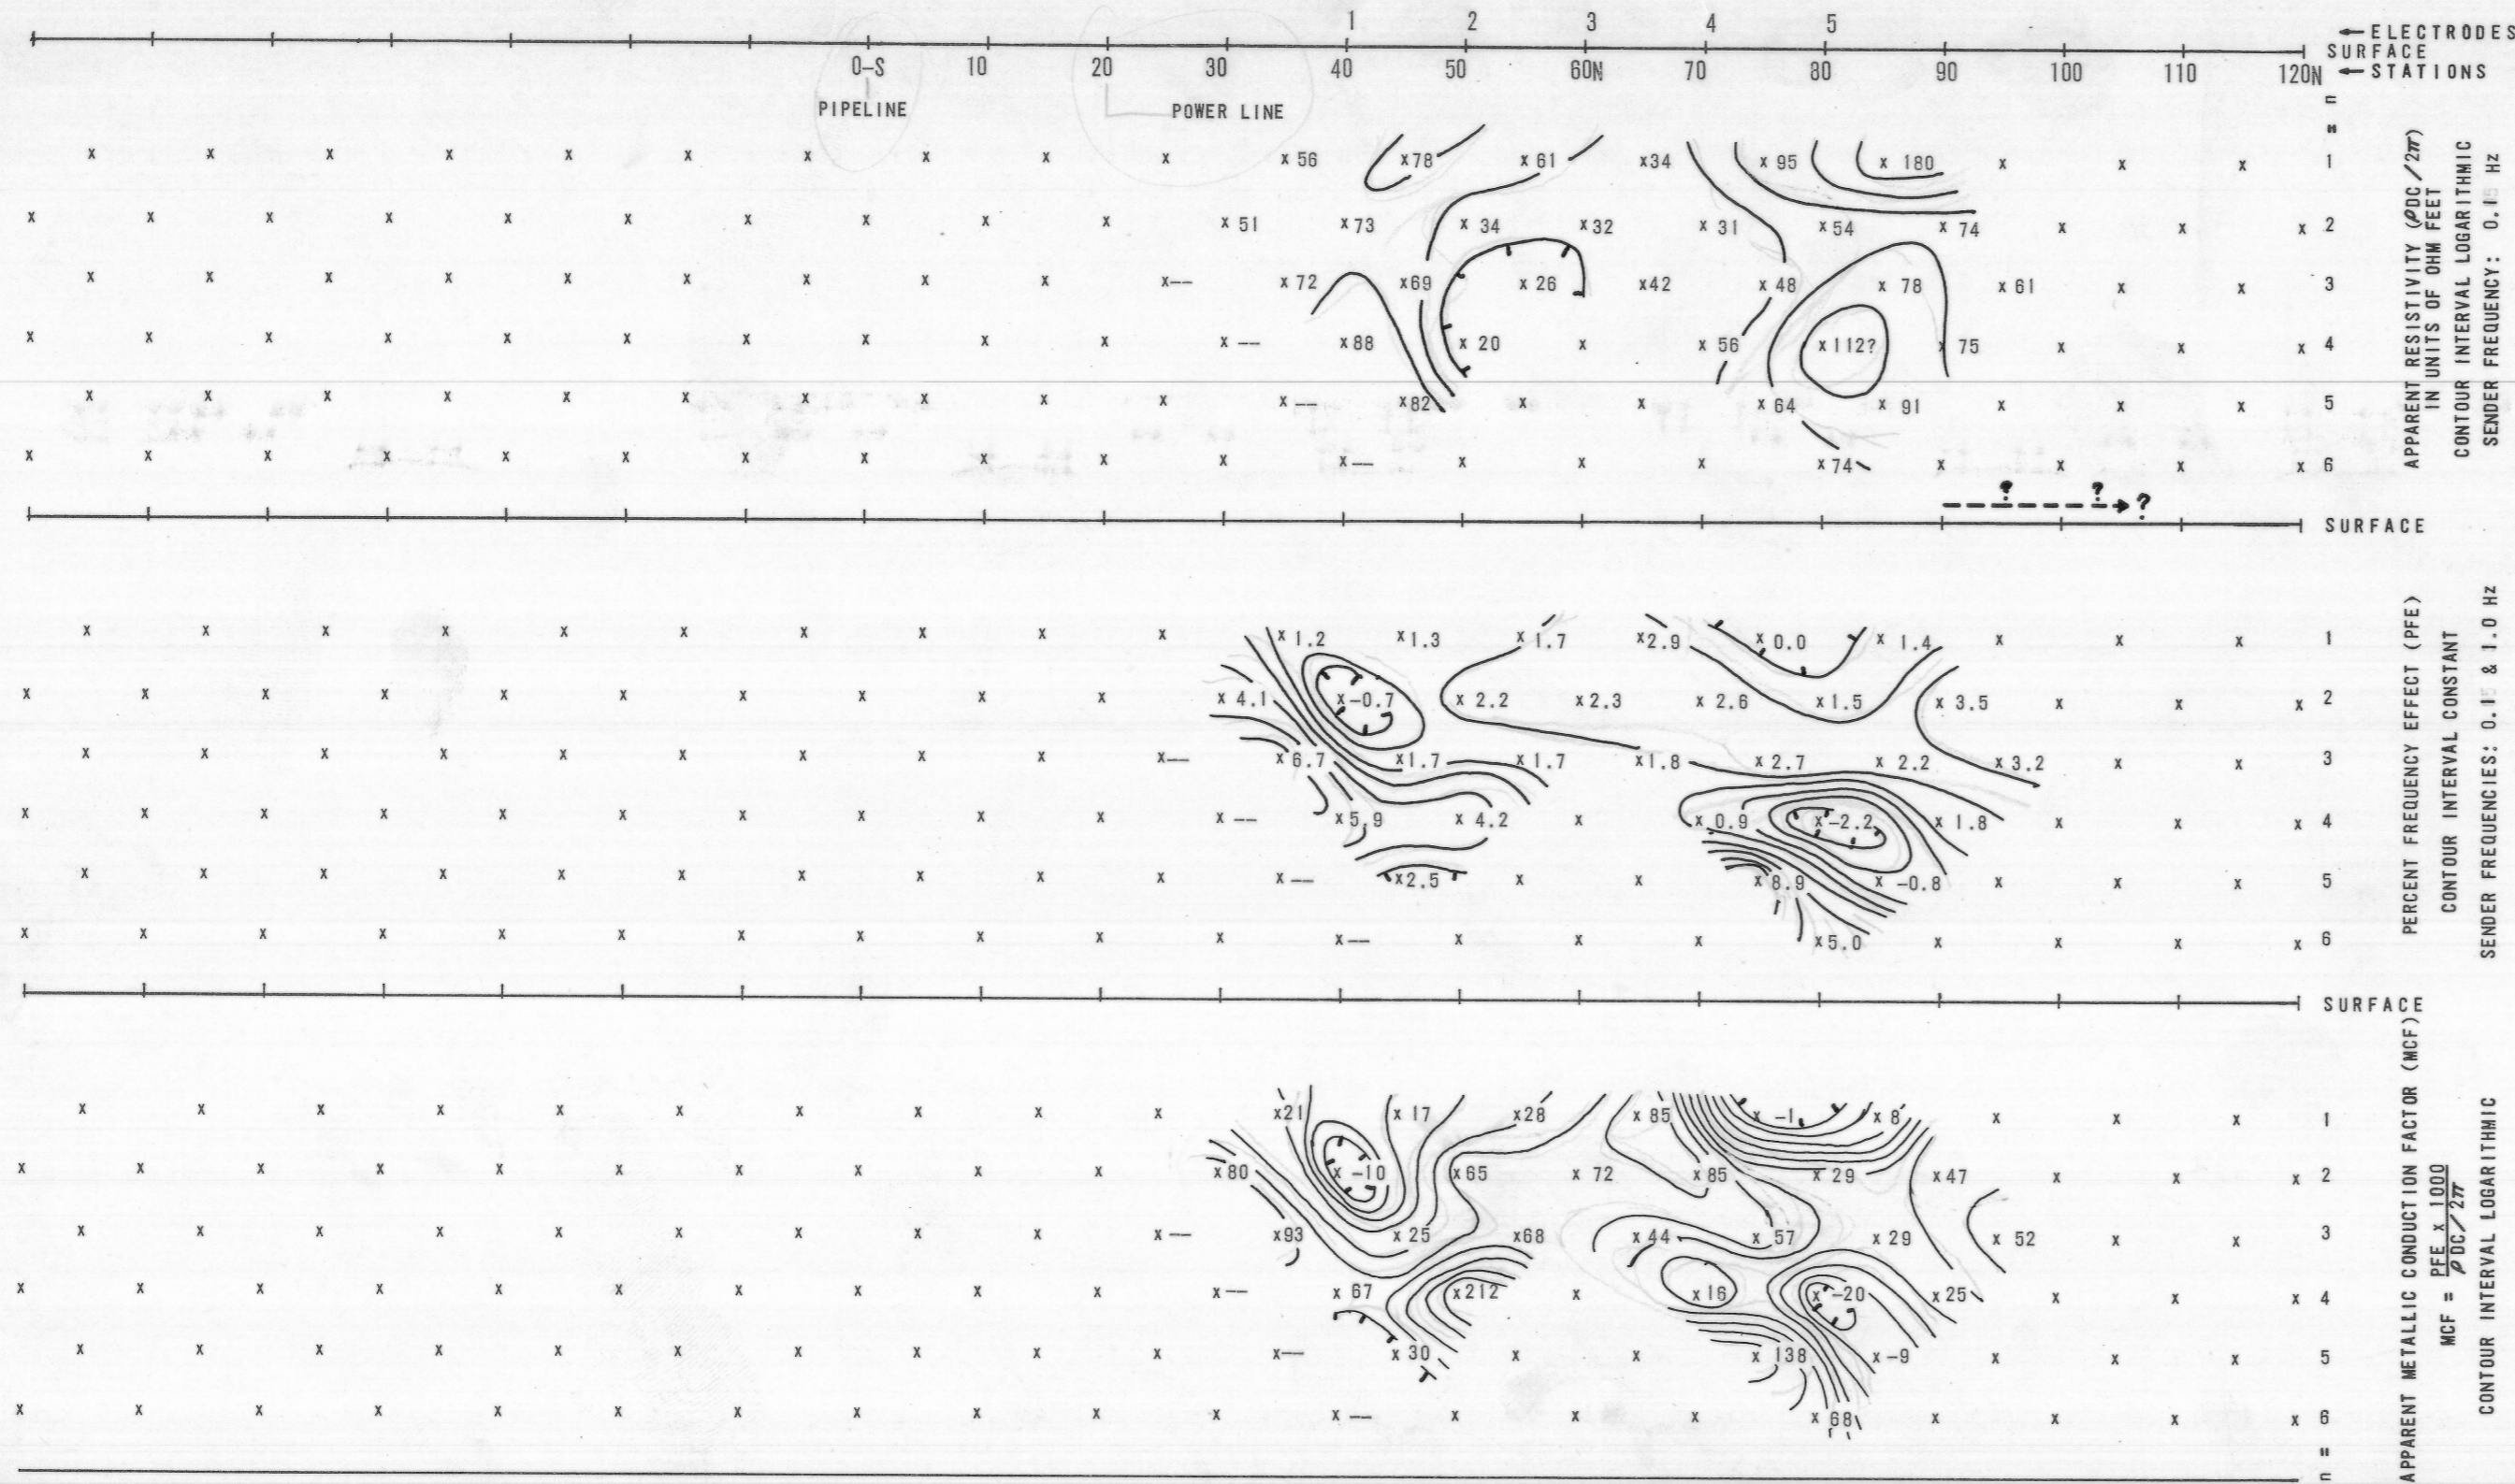


APPARENT RESISTIVITY (ρ_{ac}/2π)
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.1 Hz


PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.1 & 1.0 Hz

APPARENT METALLIC CONDUCTION FACTOR (MCF)
MCF = $\frac{PFE \times 1000}{\rho_{ac}/2\pi}$
CONTOUR INTERVAL LOGARITHMIC


RELATIVE ANOMALY STRENGTH



DIPOLE DIPOLE ELECTRODE ARRAY

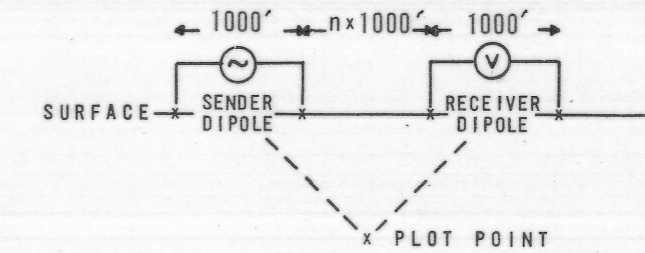

AREA
BAGDAD
LOOKING
N 80° W
DATE
JAN 1970
SCALE

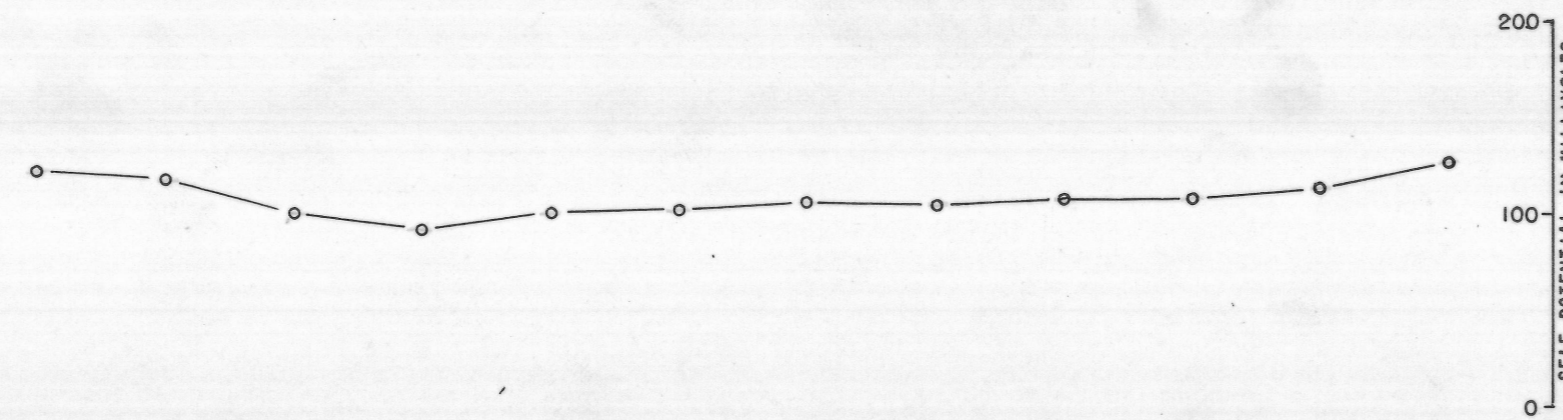

**HEINRICHS
GEOEXPLORATION COMPANY**

AUSTRALIA (SYDNEY)
39 Hume Street
Crows Nest, NSW
Phone: 439-1793

U.S.A.
Post Office Box 5964
Tucson, Arizona 85703
Phone: (602) 623-0578
Cable: GEDEX, Tucson