

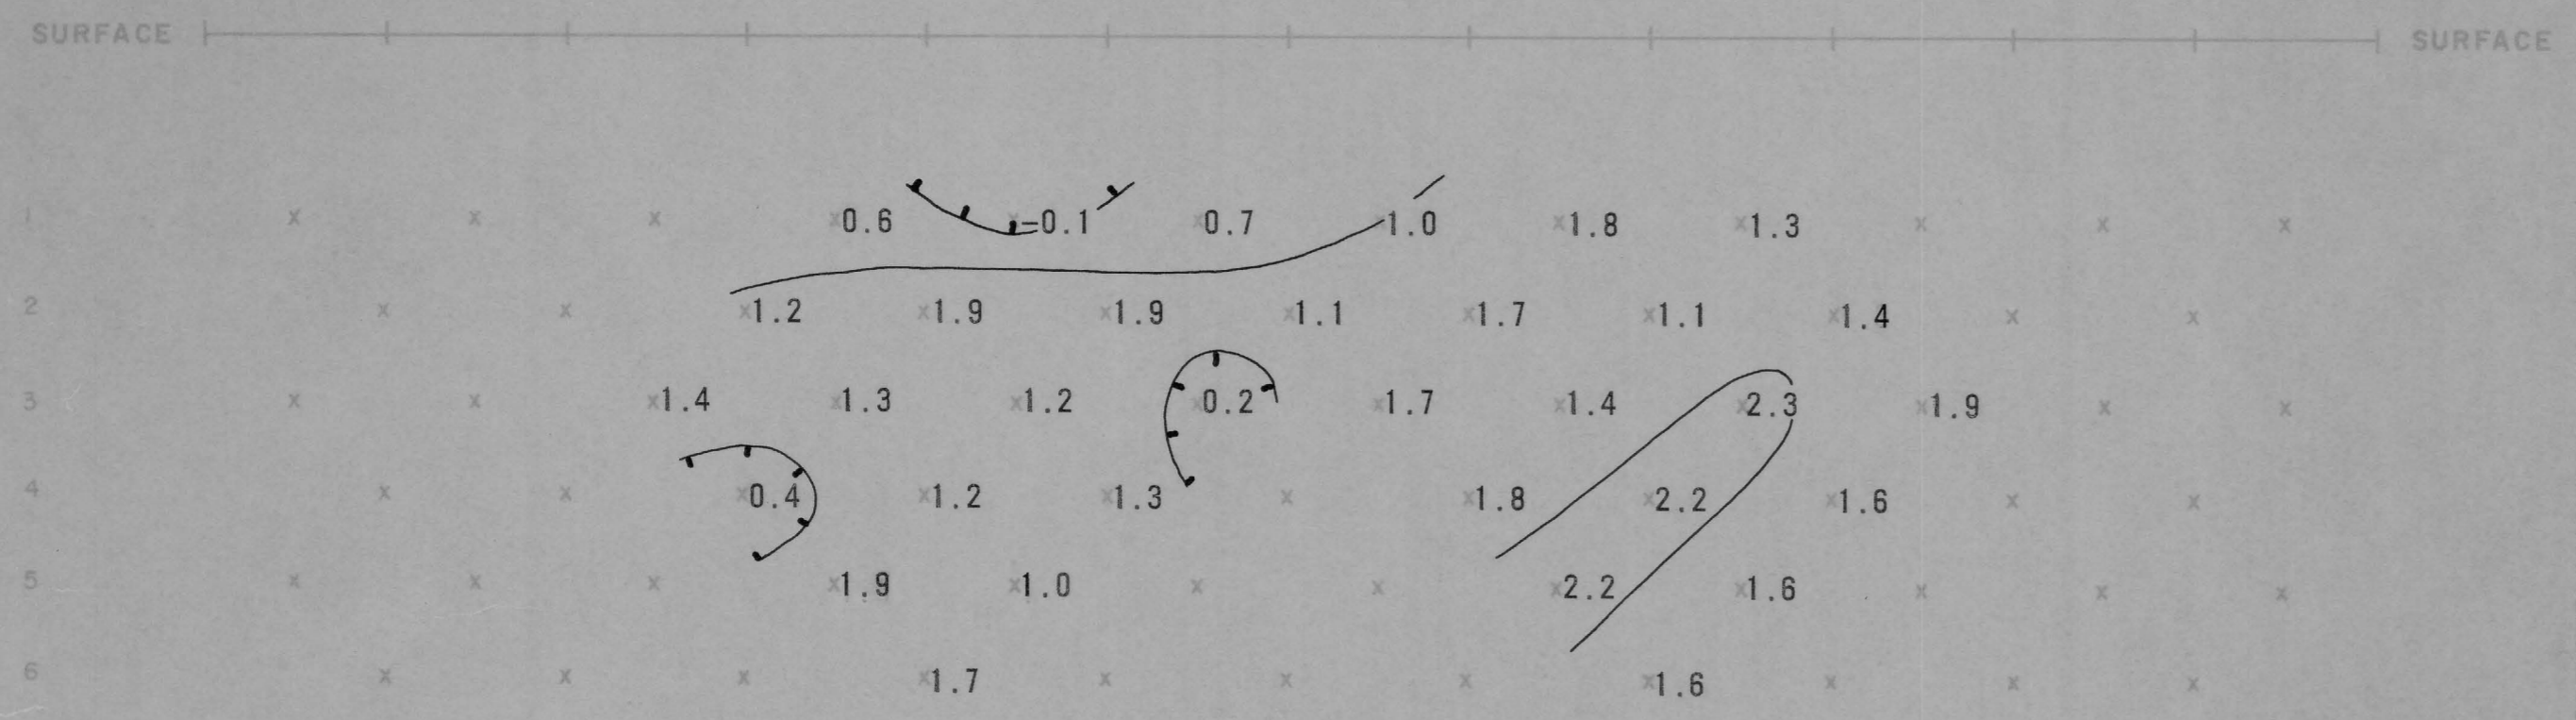


APPARENT RESISTIVITY (ρ_a) IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 CPS

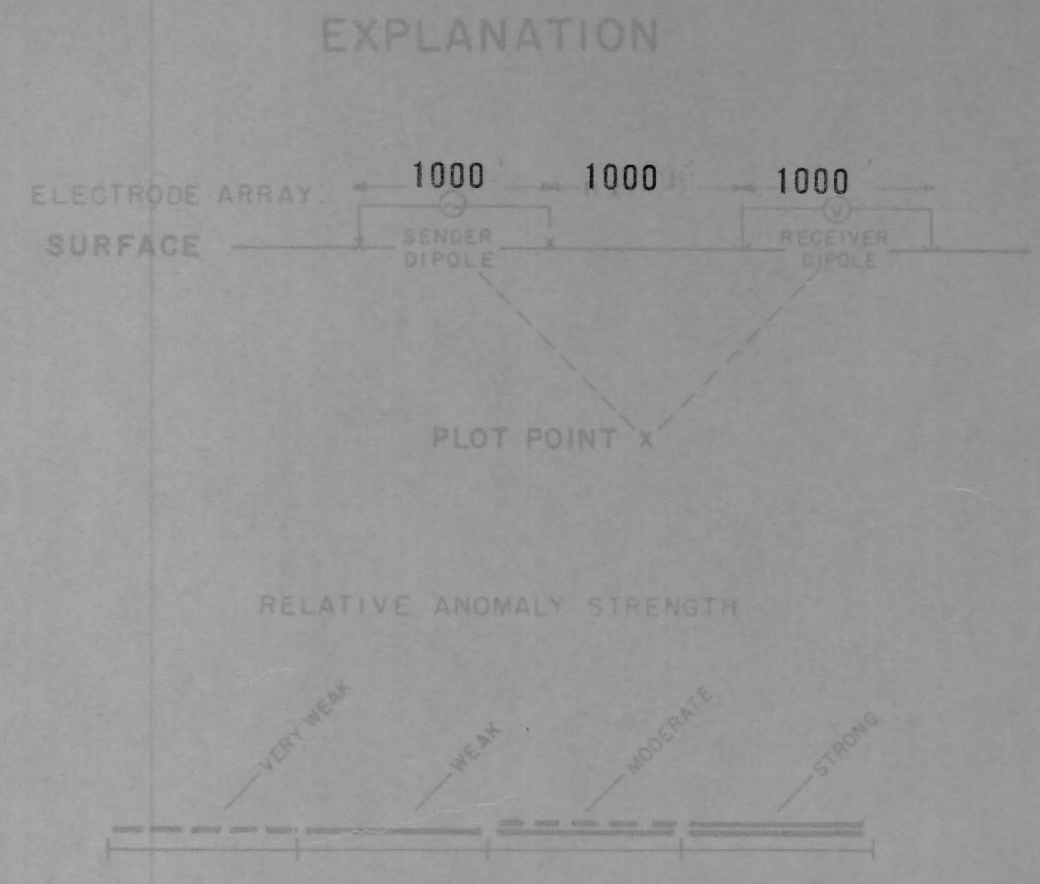

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 1.0 CPS

LOOKING NORTH

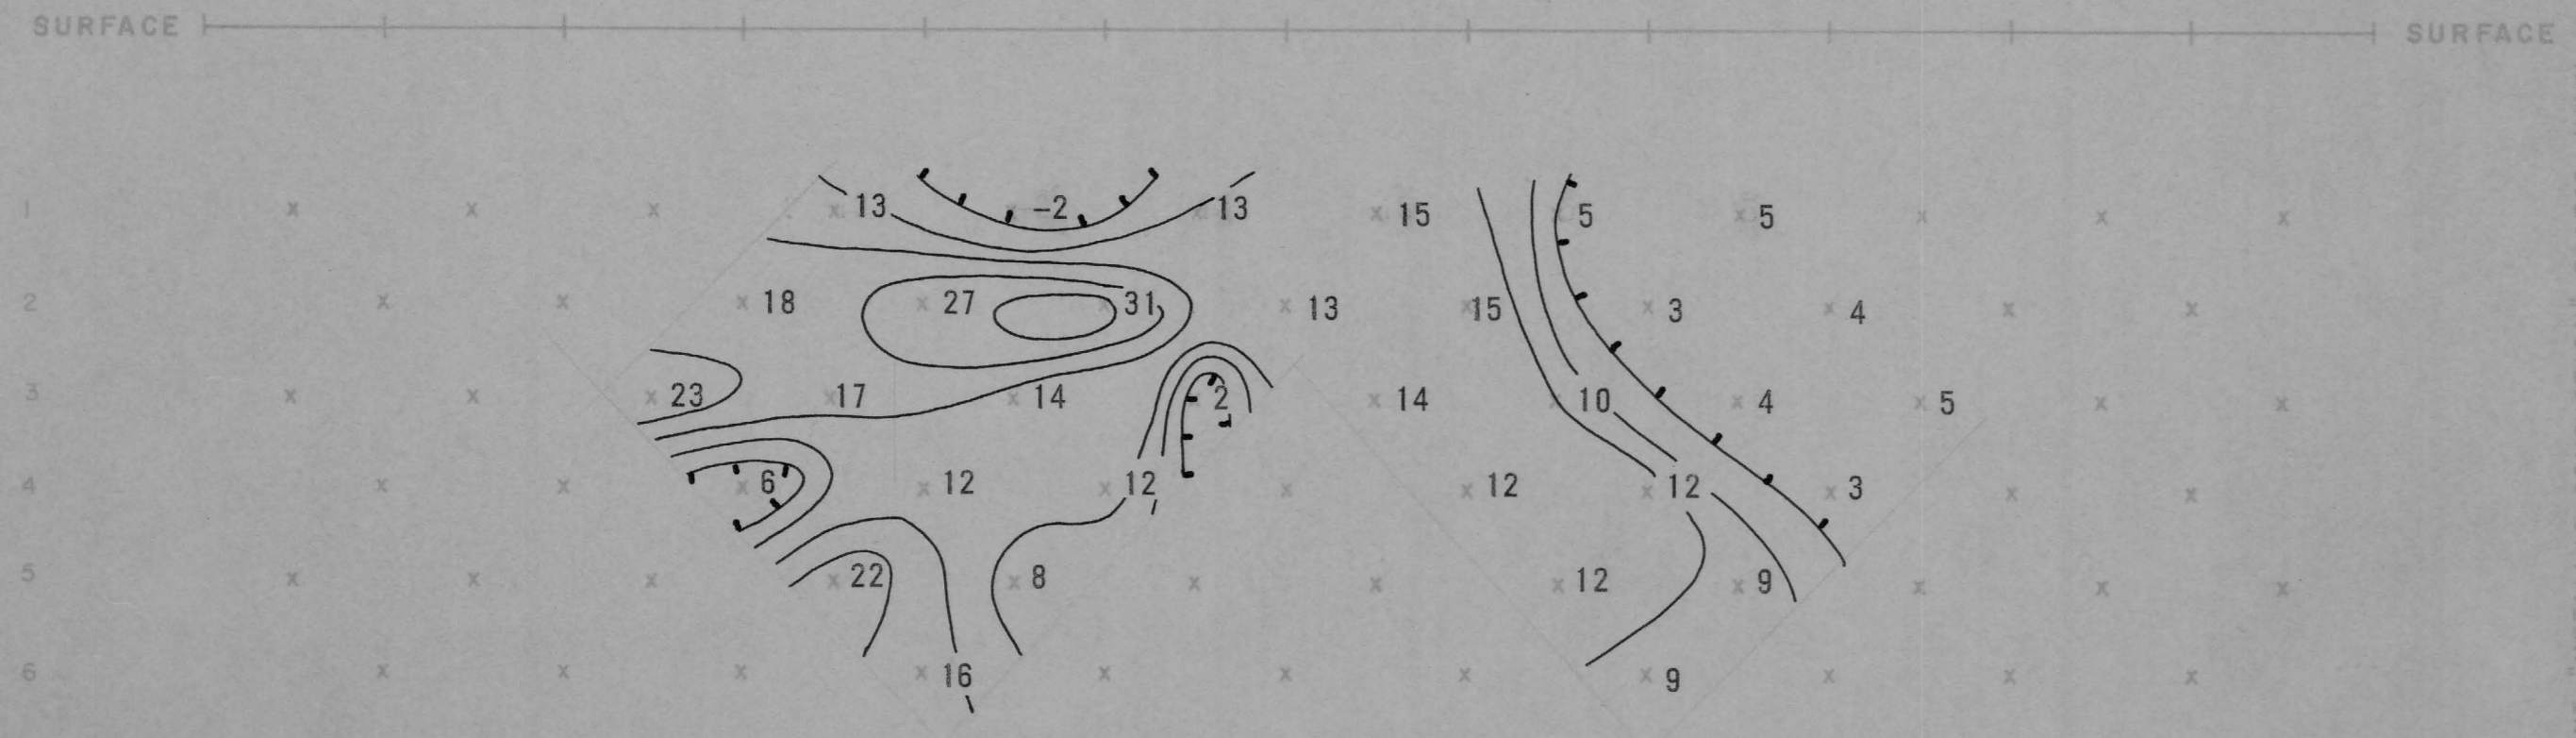

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 (MCF = $\frac{PFE \times 1000}{\rho_a \times 2\pi}$)
 CONTOUR INTERVAL LOGARITHMIC

SUIZO CLAIM AREA
 OWLHEAD PROJECT
 SECTIONAL DATA SHEET
 LINE NO. 3
 INDUCED POLARIZATION TRAVERSE
 HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 1000' DATE: MARCH 1968

FOR
 MR. RUSSELL BADGETT, JR.

SELF POTENTIAL

