



STATIONS SURFACE 60W 50 40 30 20 10 0-E/W 10 20 30 40 50E 60E SURFACE

INTERVAL BETWEEN SENDER & RECEIVER DIPOLES

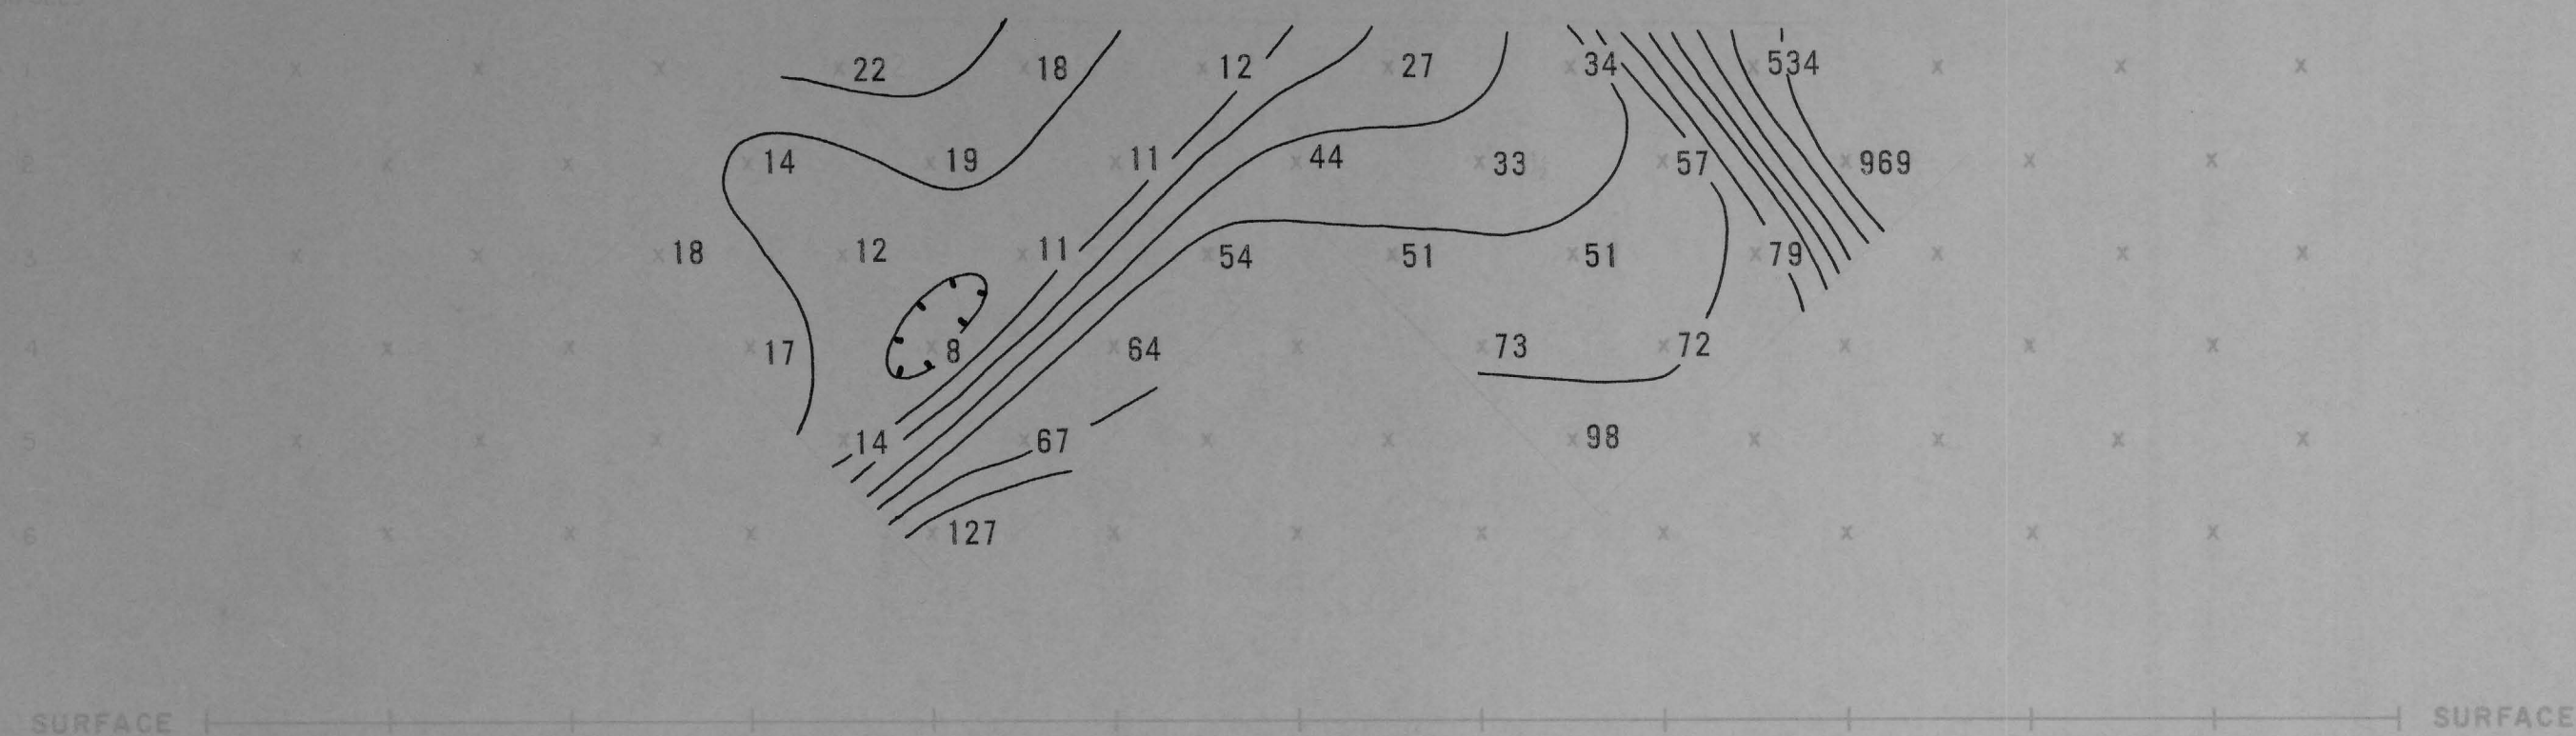


APPARENT RESISTIVITY (ρ_a)
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 CPS

SURFACE SURFACE

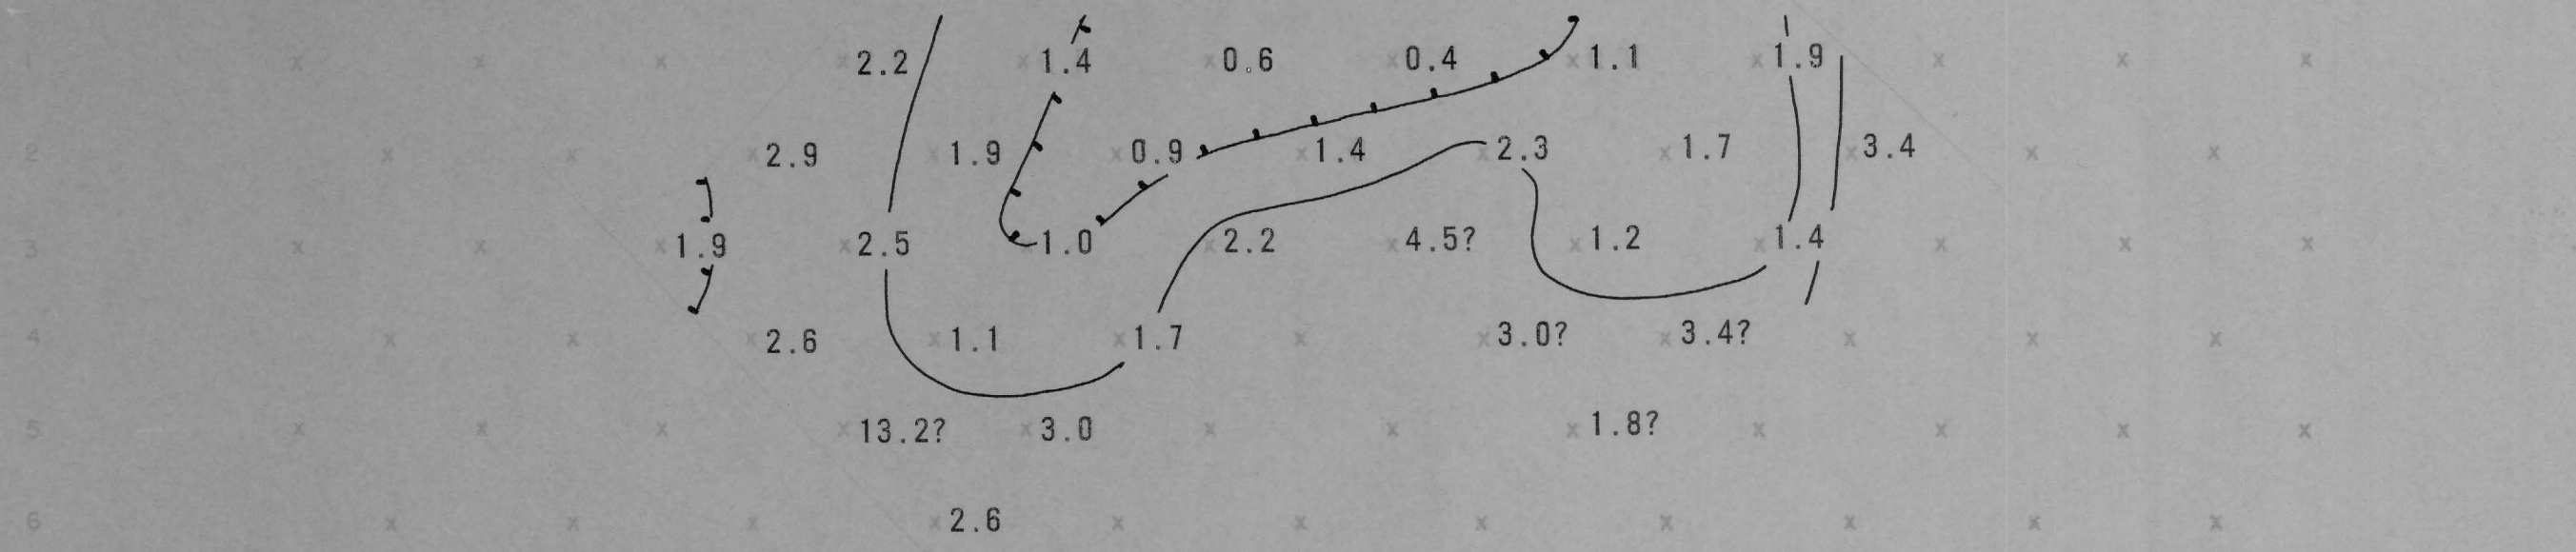


PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 1.0 CPS

SURFACE SURFACE

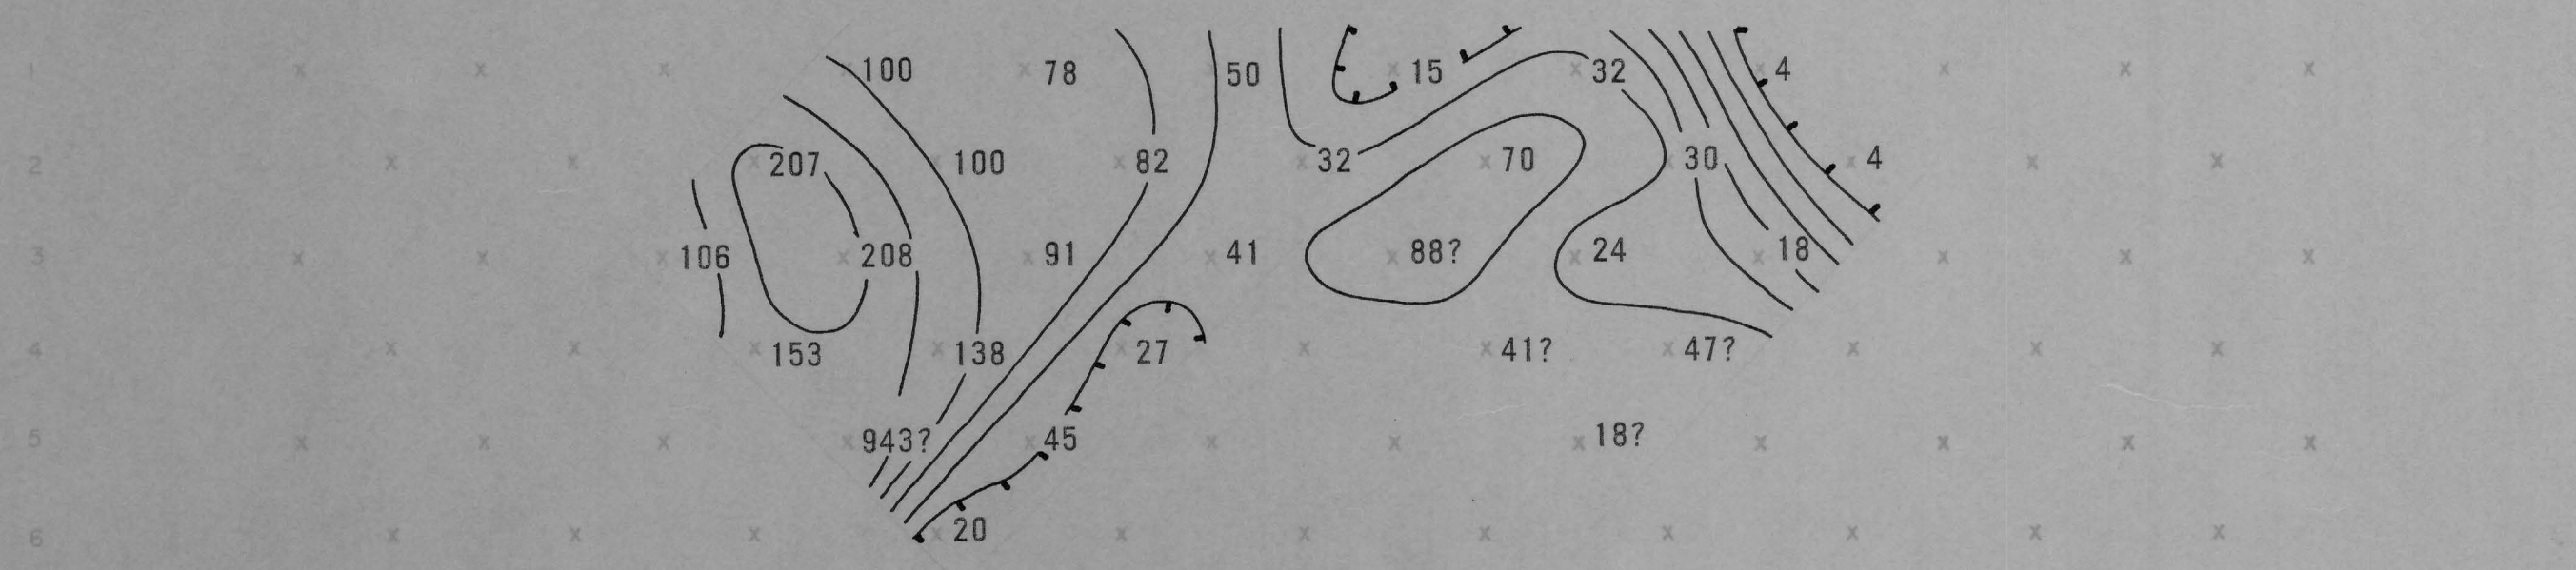


APPARENT "METALLIC CONDUCTION" FACTOR (MGF)
(MGF = $\frac{\rho_a}{\rho_{0.05}} \times 1000$)
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

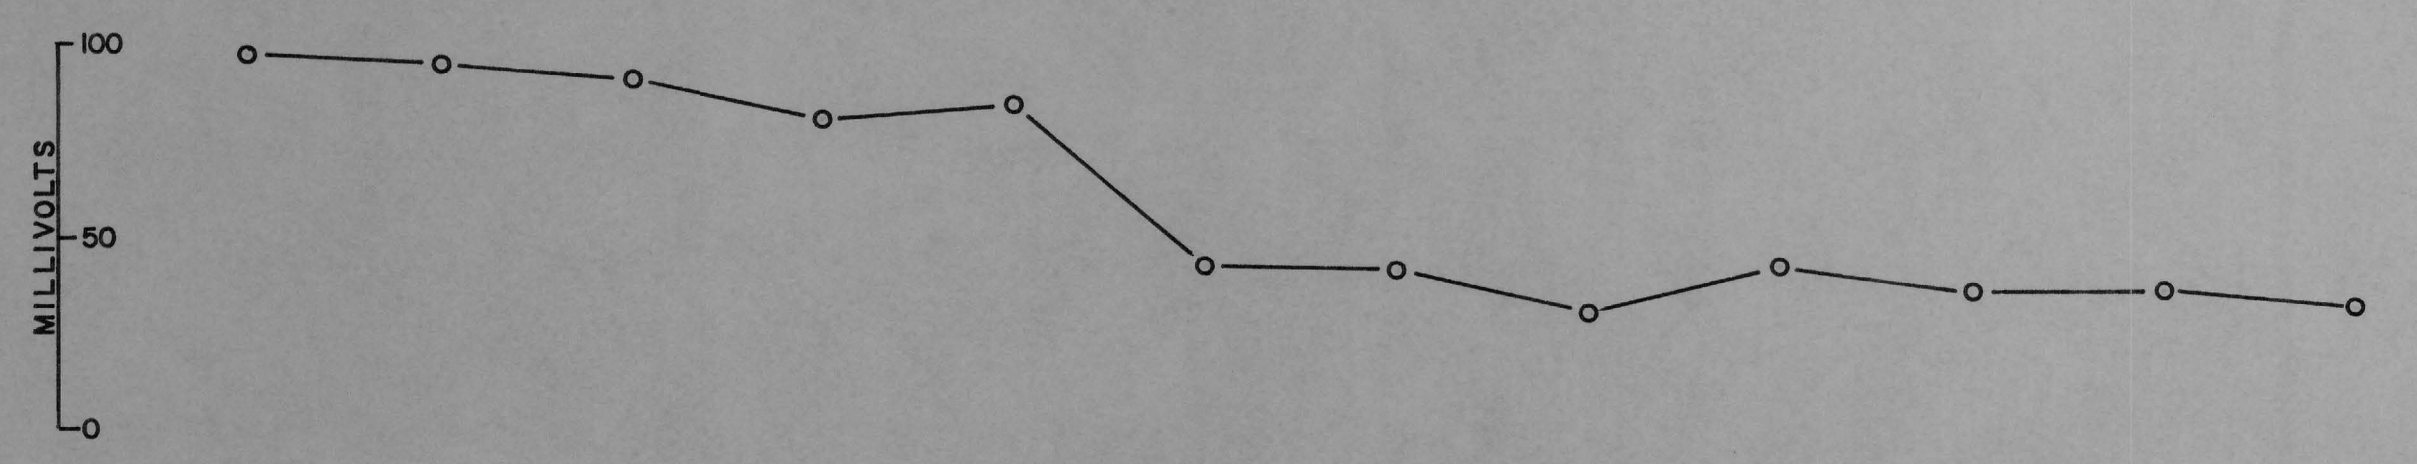

EXPLANATION

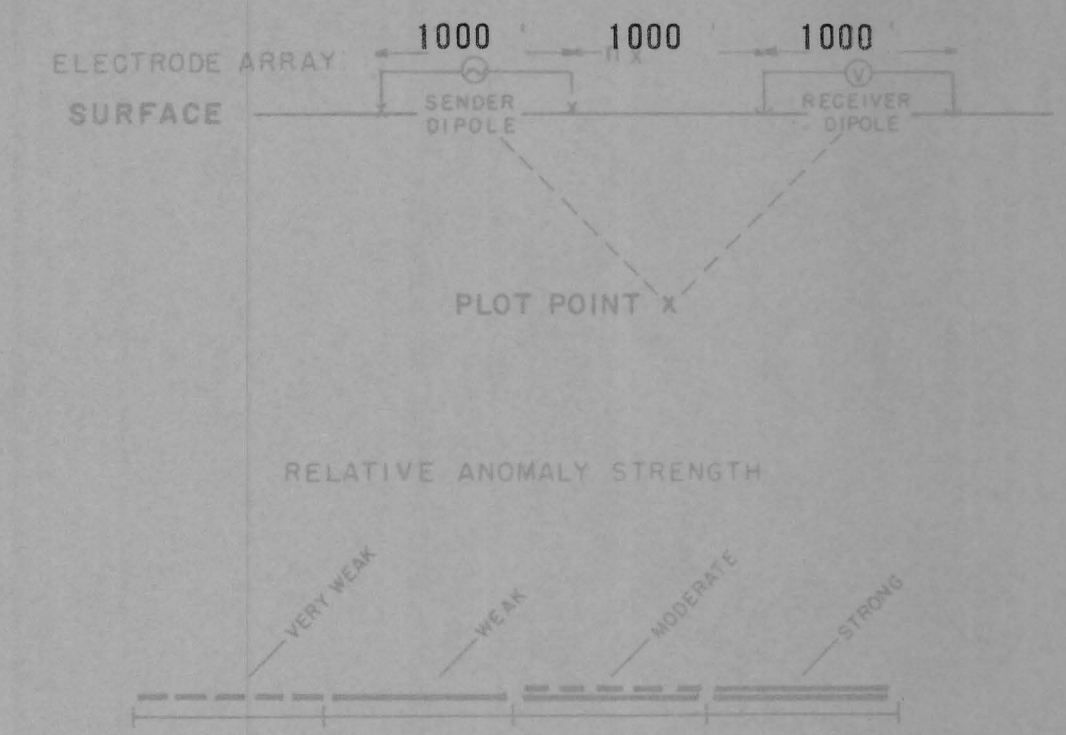

LOOKING NORTH

SUIZO CLAIM AREA
OWLHEAD PROJECT
SECTIONAL DATA SHEET
LINE NO. 4
INDUCED POLARIZATION TRAVERSE
HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 1000' DATE: MARCH 1968
FOR
MR. RUSSELL BADGETT, JR.