



APPARENT RESISTIVITY (ρ_a)
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 C.P.S.


EXPLANATION

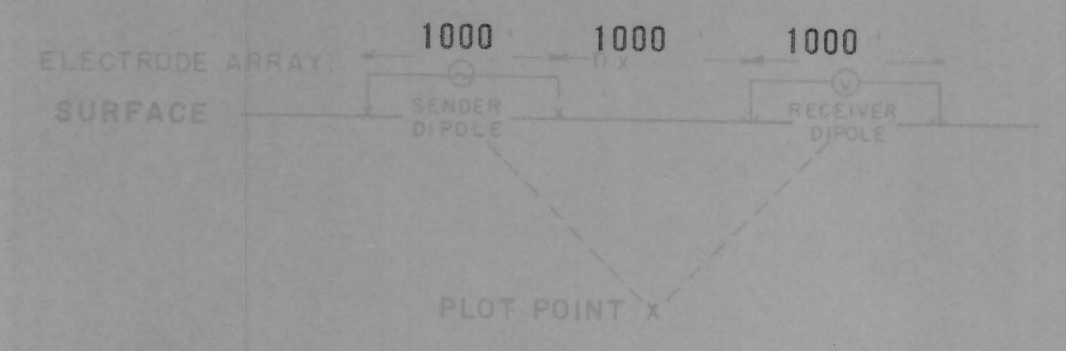


RELATIVE ANOMALY STRENGTH

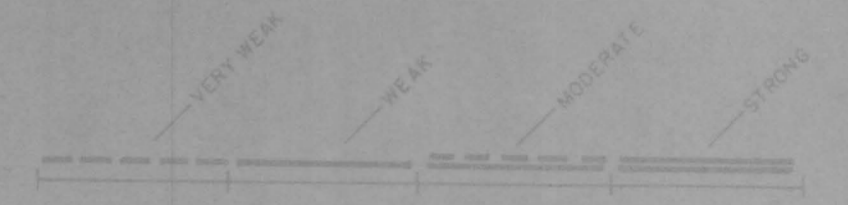

LOOKING NORTH

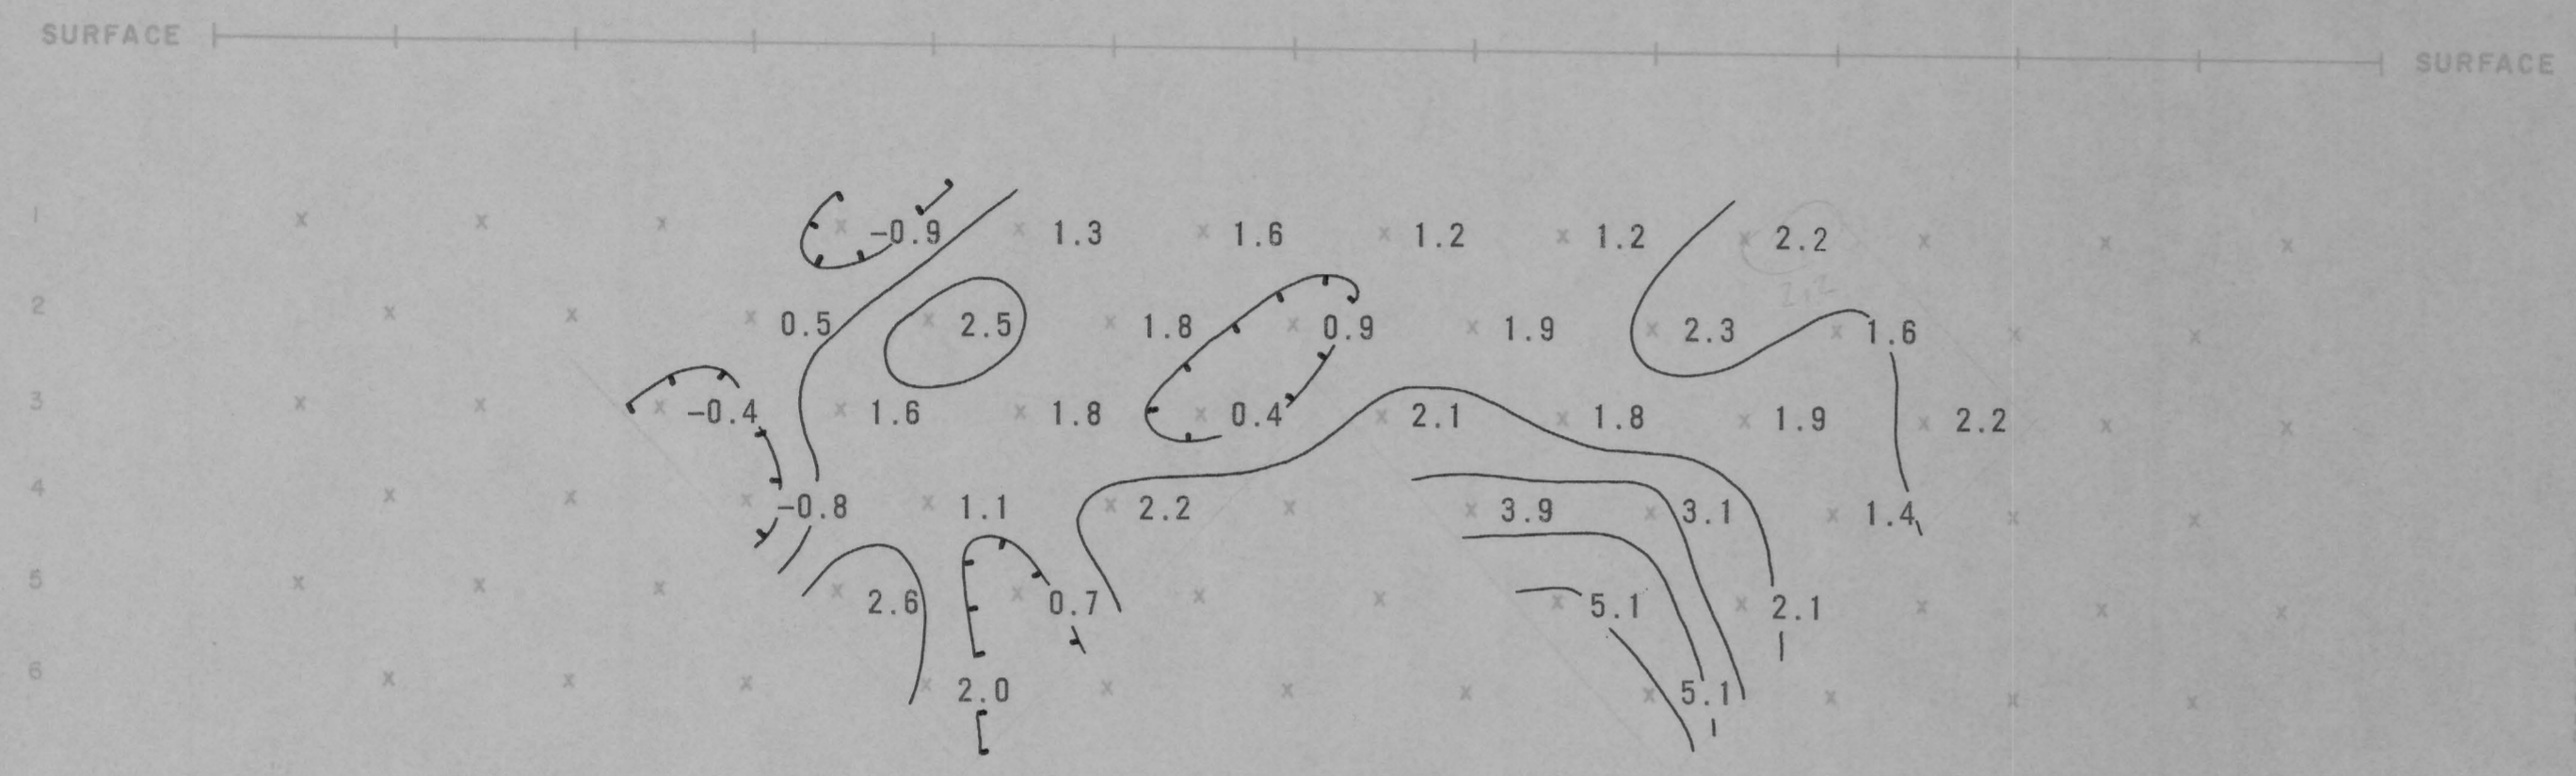

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 1.0 C.P.S.

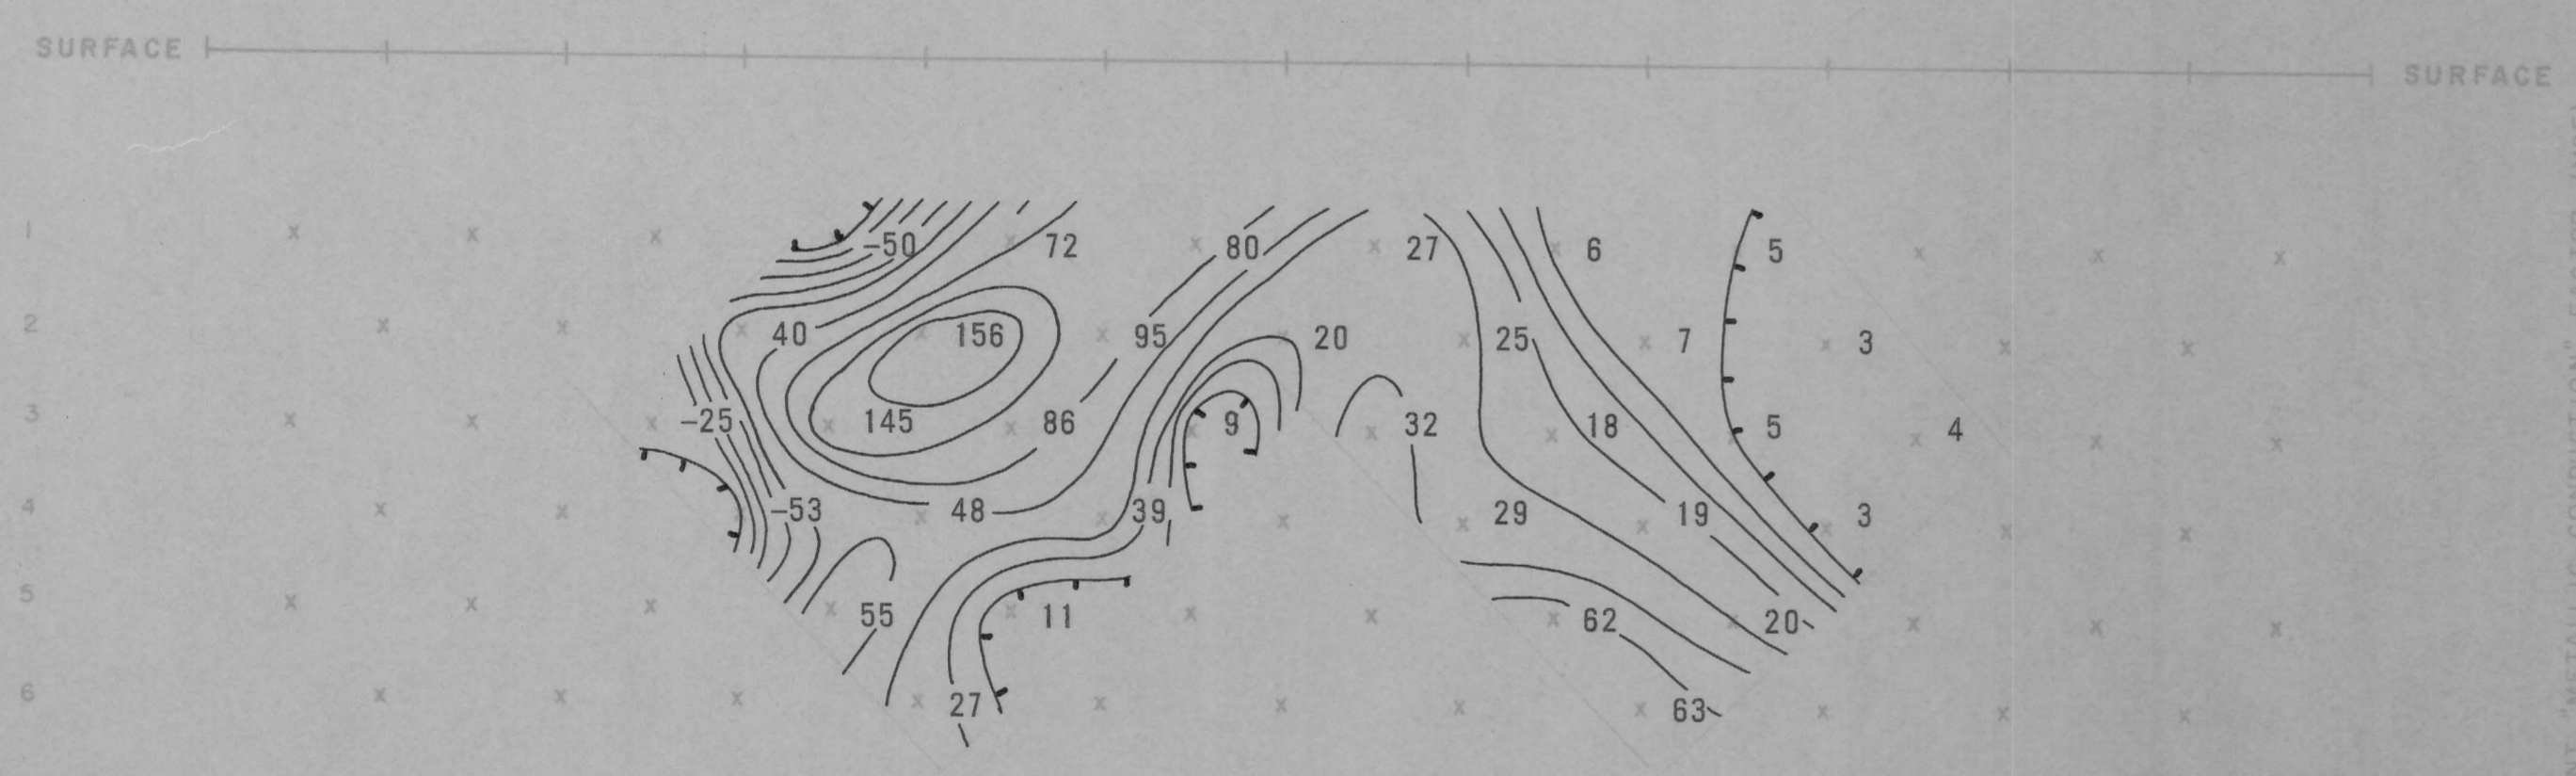

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
(MCF = $\frac{PFE \times 1000}{\rho_a}$)
CONTOUR INTERVAL LOGARITHMIC

OWLHEAD PROJECT
SUIZO CLAIM AREA
SECTIONAL DATA SHEET
LINE NO. 1
INDUCED POLARIZATION TRAVERSE
HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 1000' DATE: MARCH 1968

FOR
MR. RUSSELL BADGETT, JR.

SELF POTENTIAL

