


APPARENT RESISTIVITY (P_{OC}) IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 cps

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 3.0 cps

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 (MCF = $\frac{P_{OC} \cdot P_{DC}}{P_{500}}$)
 CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL SURFACE PROFILE GEOLOGY, ETC.

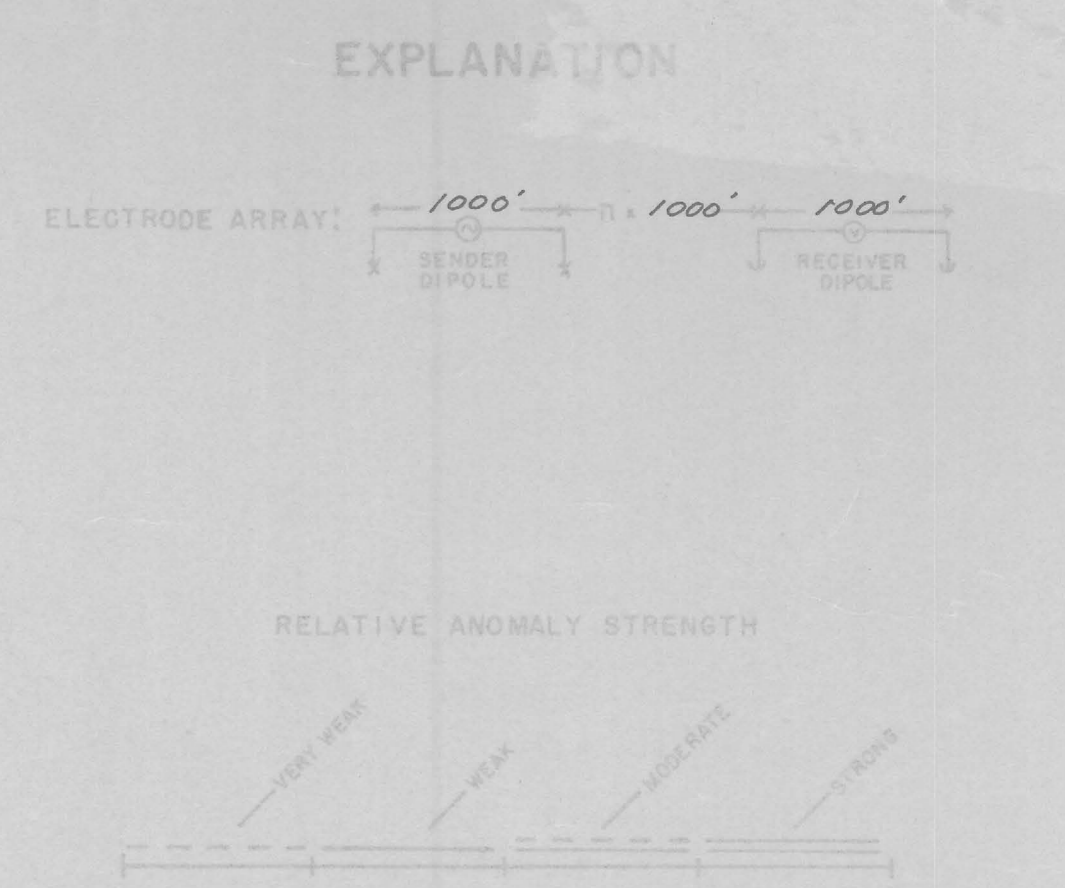

SECTIONAL DATA SHEET
 LINE No V-- Spreads 1, 2, & 3
 INDUCED POLARIZATION TRAVERSE
 DEMETRIE WASH PROJECT
 HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 1000'
 DATE: March 1964

FOR
 THE SUPERIOR OIL COMPANY
 MINERALS DIVISION
 TUCSON, ARIZONA