


ELECTRODE STATIONS
 100' INTERVAL BETWEEN SENDER AND RECEIVER DIPOLES




Spread 3: 10S, 9S, 8S, 7S, 6S, 5S, 4S, 3S, 2S, 1S, 0 1/2, 1N, 2N, 3N, 4N, 5N, 6N, 7N, 8N, 9N, 10N, 11N, 12N, 13N
 Spread 1: 1, 2, 3, 4, 5
 Looking West

EXPLANATION

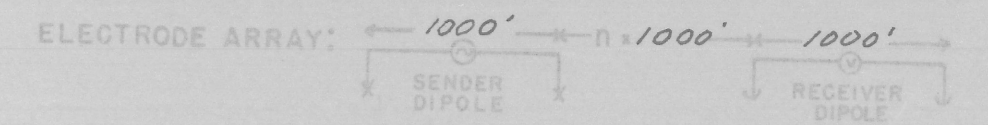


APPARENT RESISTIVITY (PDC)
 IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 cps

RELATIVE ANOMALY STRENGTH

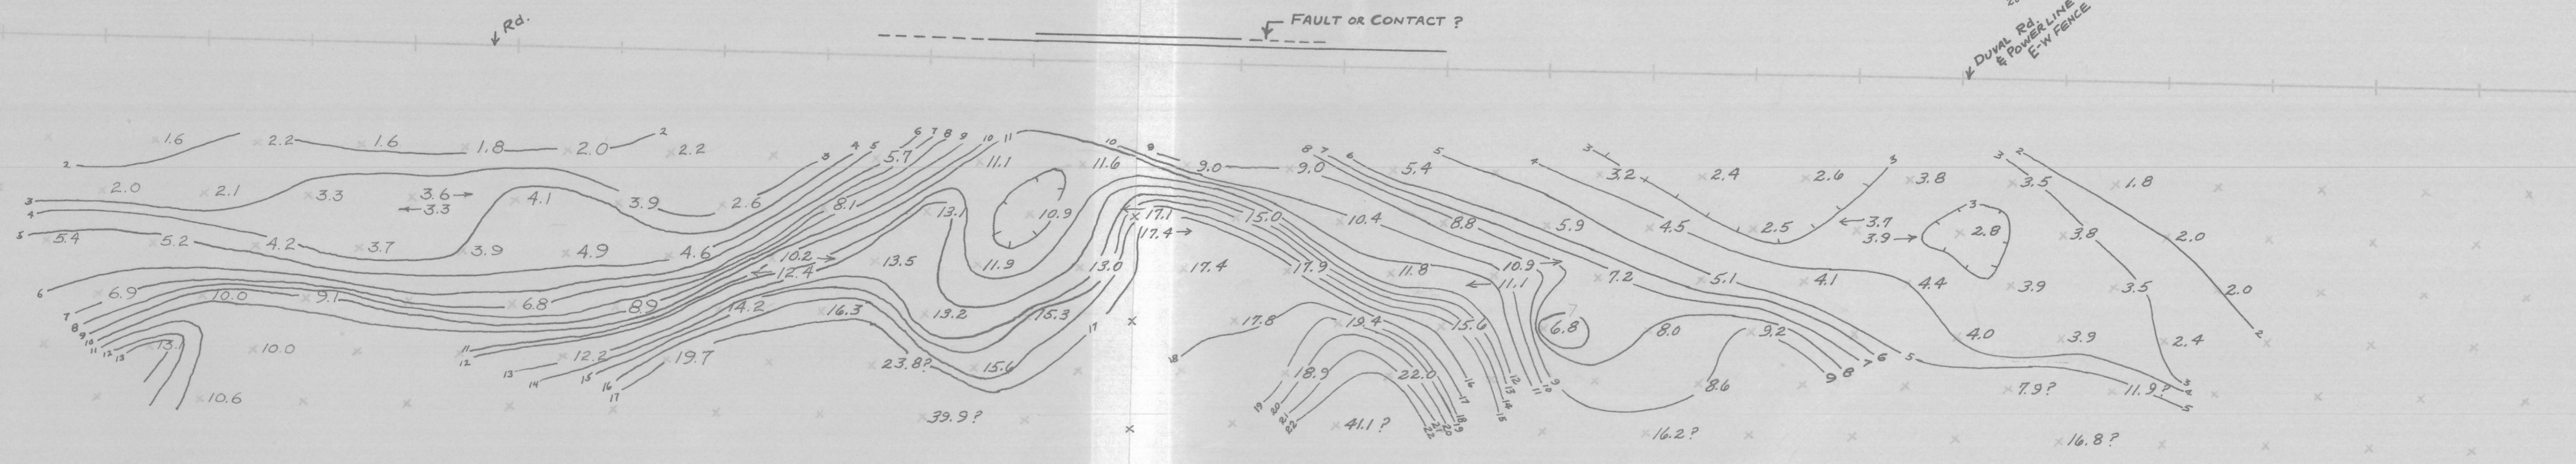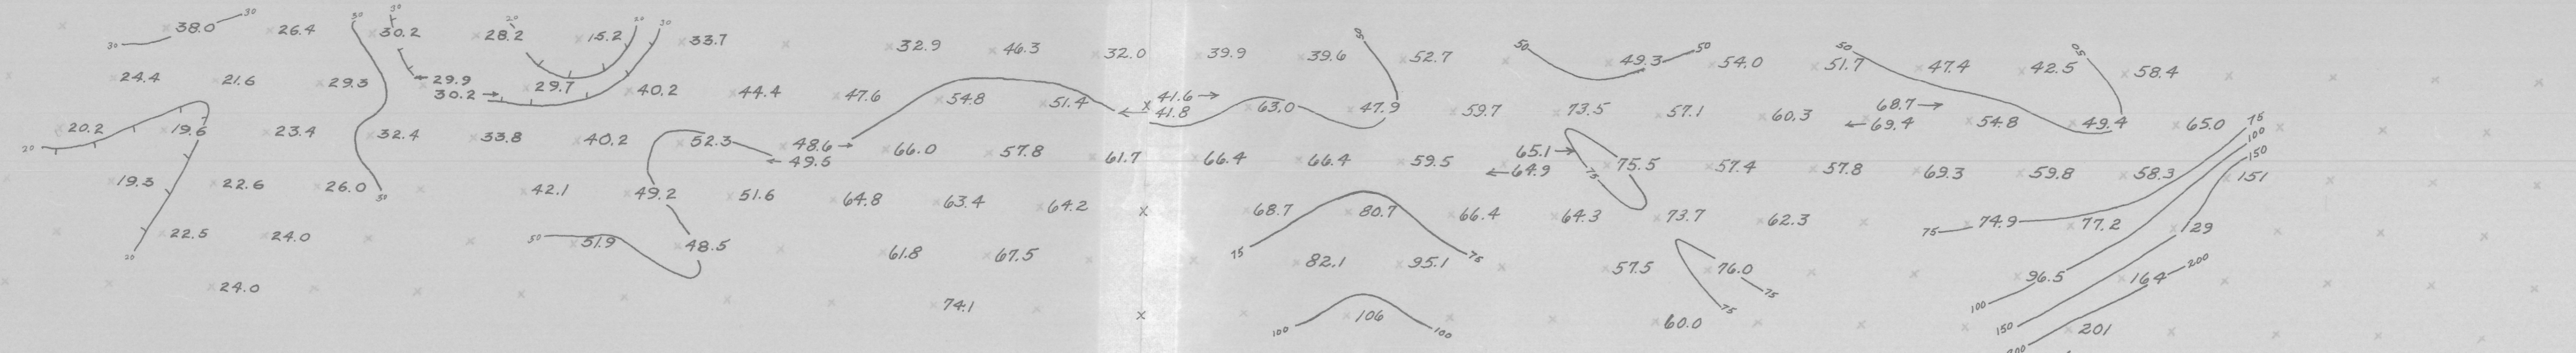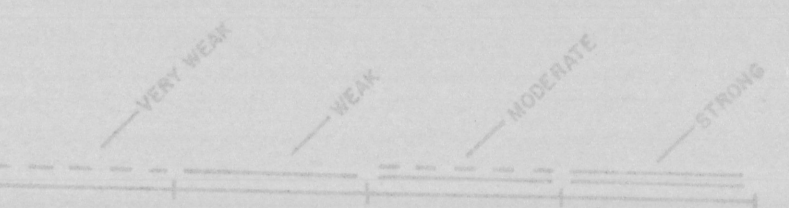

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 3.0 cps

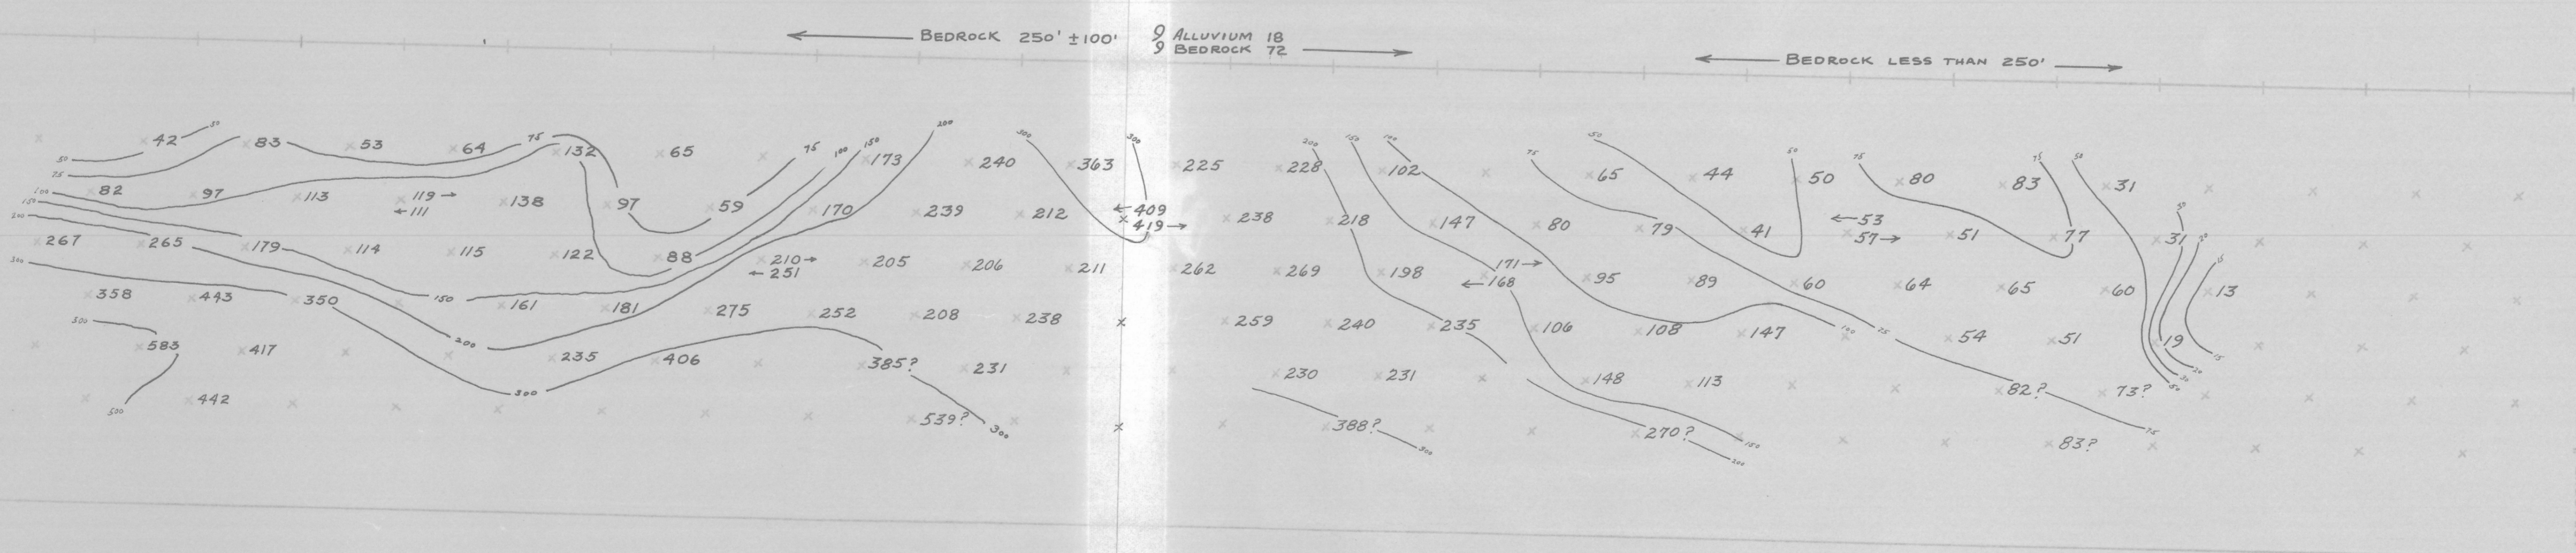

APPARENT METALLIC CONDUCTION FACTOR (MCF)
 (MCF = PDC / (PDC + 100))
 CONTOUR INTERVAL LOGARITHMIC

← BEDROCK 250' ± 100' 9 ALLUVIUM 18 BEDROCK 72 → BEDROCK LESS THAN 250'

SECTIONAL DATA SHEET
 LINE No. Y-- Spreads 1, 2, & 3
 INDUCED POLARIZATION TRAVERSE
 DEMETRIE WASH PROJECT
 HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 1000' DATE: March 1964

FOR
 THE SUPERIOR OIL COMPANY
 MINERALS DIVISION
 TUCSON, ARIZONA

SELF POTENTIAL
 SURFACE PROFILE
 GEOLOGY, ETC.