


ELECTRODE STATIONS
 1/2 METER BETWEEN
 SEND & RECEIVER DIPOLES

6S 5S 4S 3S 2S 1S 0% Spread 1 1N 2N 3N 4N 5N 6N 7N 8N 9N 10N 11N 12N 13N
 Looking West Spread 2

EXPLANATION

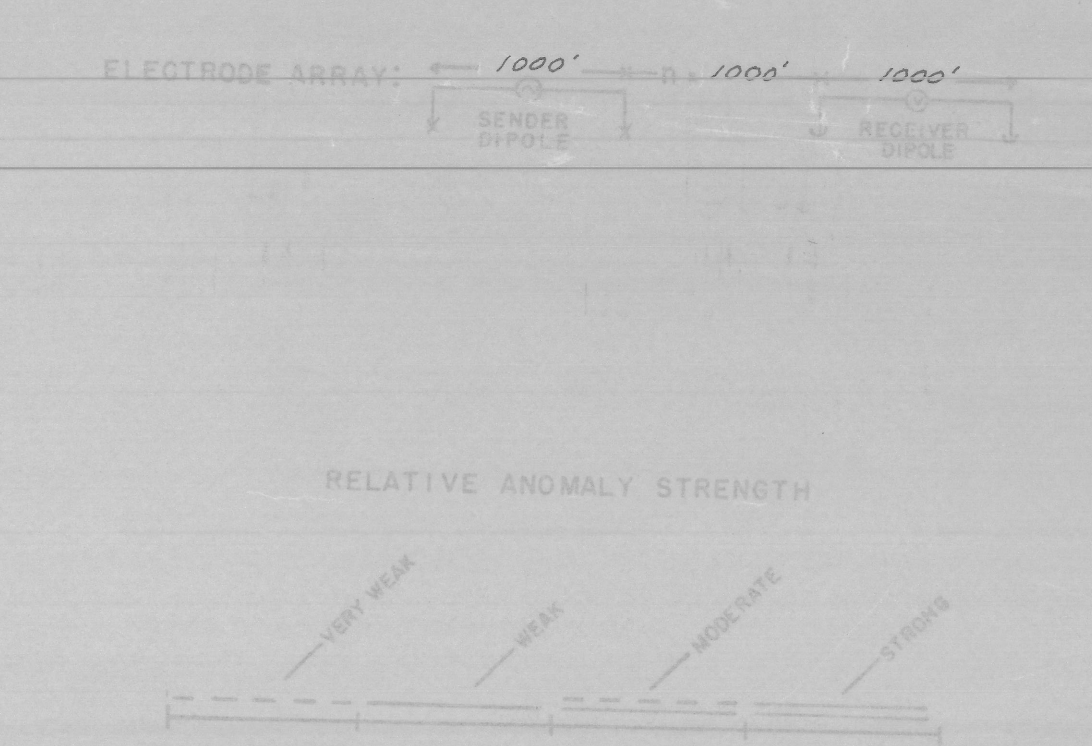

APPARENT RESISTIVITY (P/C)
 IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 cps

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 3.0 cps

APPARENT METALLIC CONDUCTION FACTOR (MCF)
 (MCF = PFE x 1000 / P/C)
 CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL
 SURFACE PROFILE
 GEOLOGY, ETC.

SECTIONAL DATA SHEET
 LINE No U -- Spreads 1 & 2
 INDUCED POLARIZATION TRAVERSE
 DEMETRIE WASH PROJECT
 HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 1000' DATE: March 1964

FOR
 THE SUPERIOR OIL COMPANY
 MINERALS DIVISION
 TUCSON, ARIZONA

