



LOOKING WESTERLY

ELECTRODE STATIONS: 6S, 5S, 4S, 3S, 2S, 1S, 0N/S, 1N, 2N, 3N, 4N, 5N, 6N


71' INTERVAL BETWEEN SENDER & RECEIVER DIPOLES

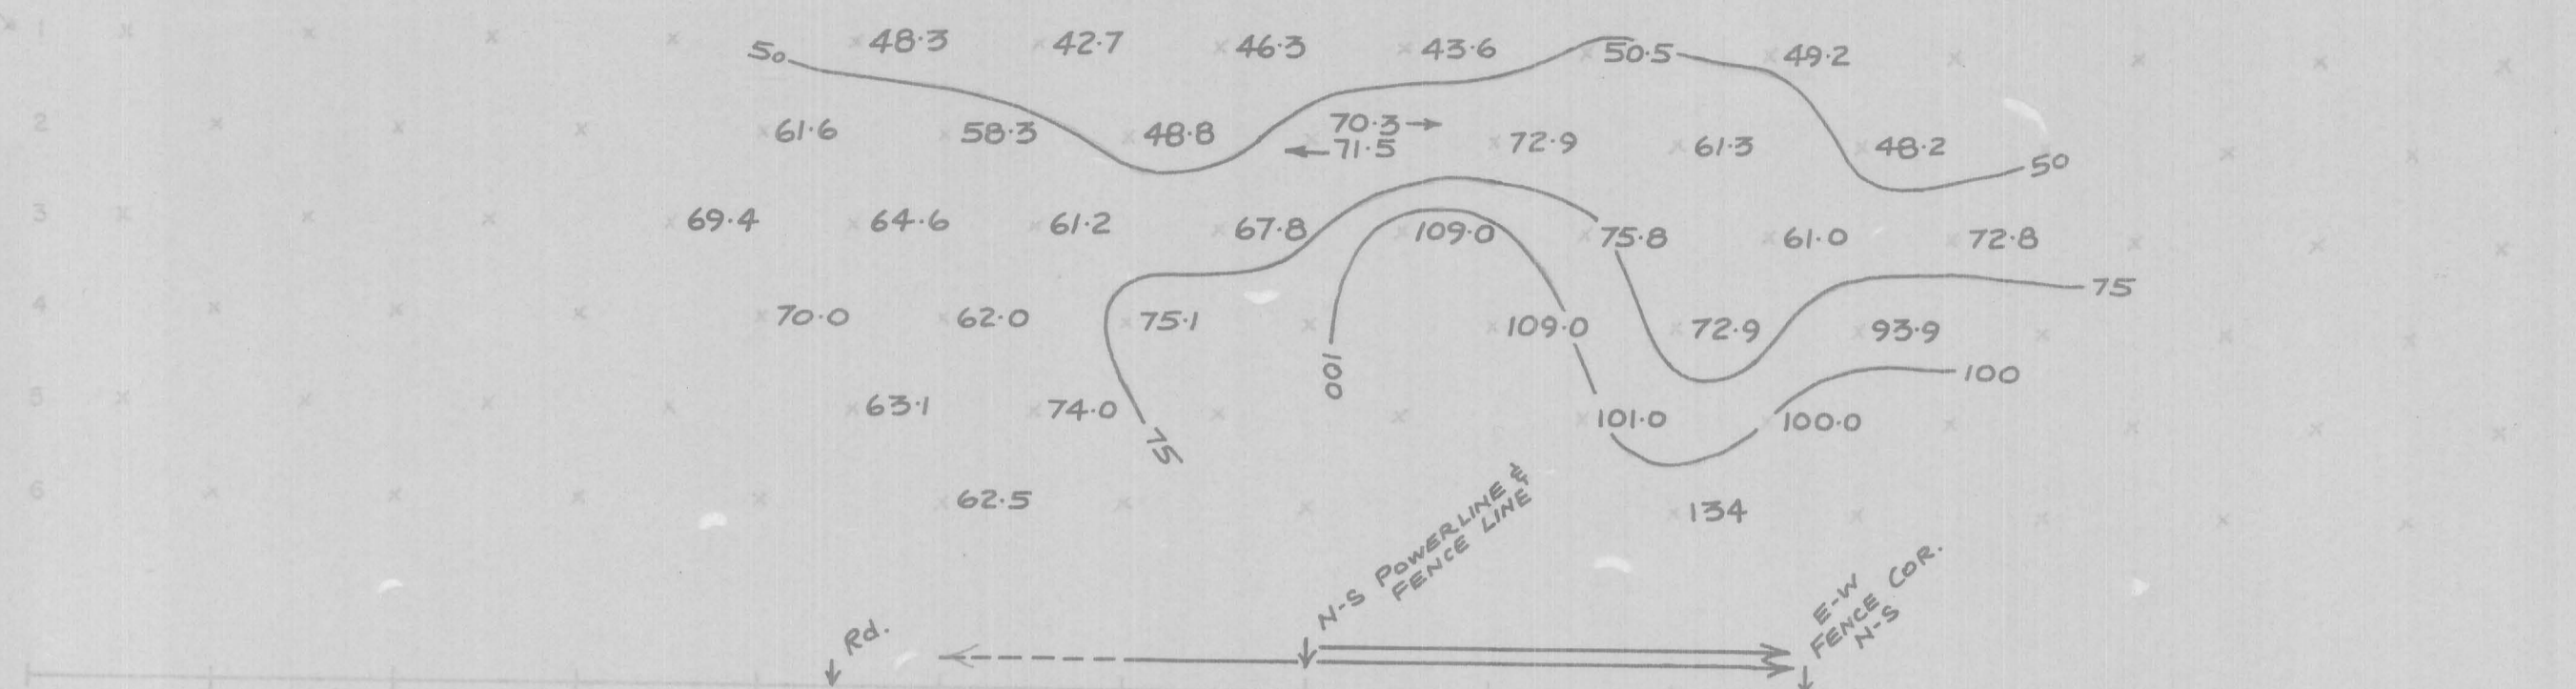

APPARENT RESISTIVITY (ρDC) IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 cps

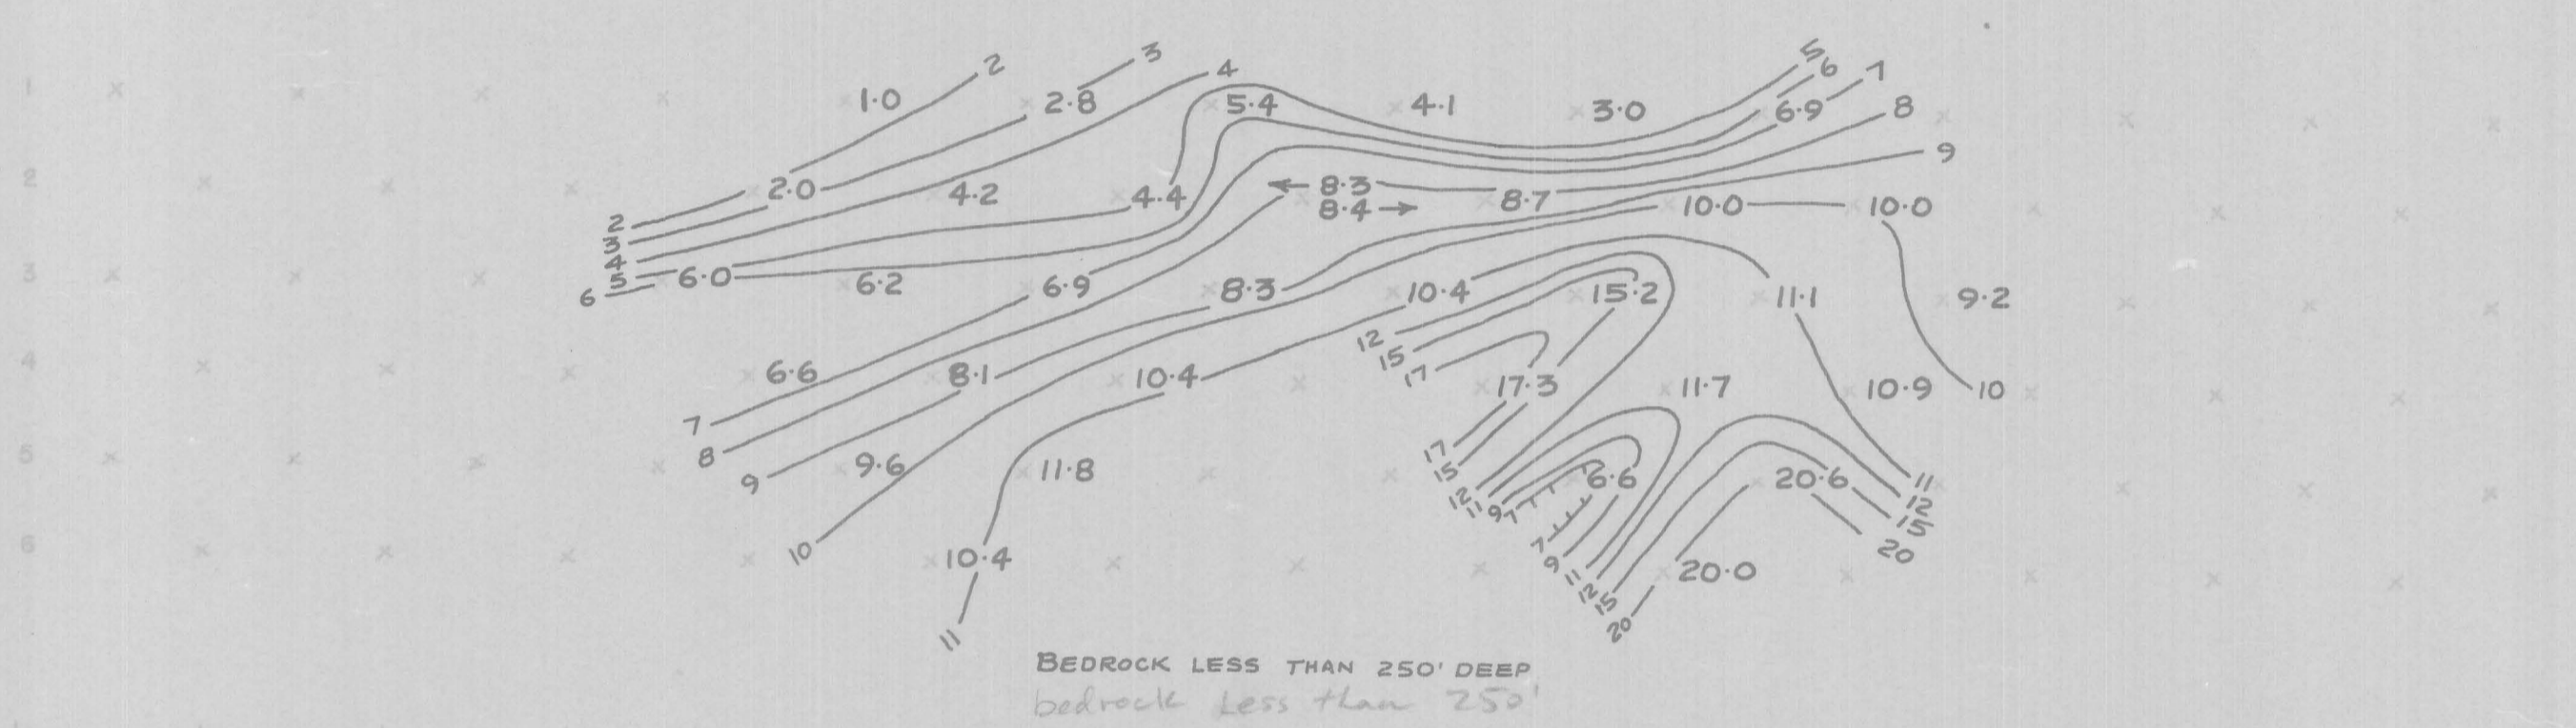

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 3.0 cps

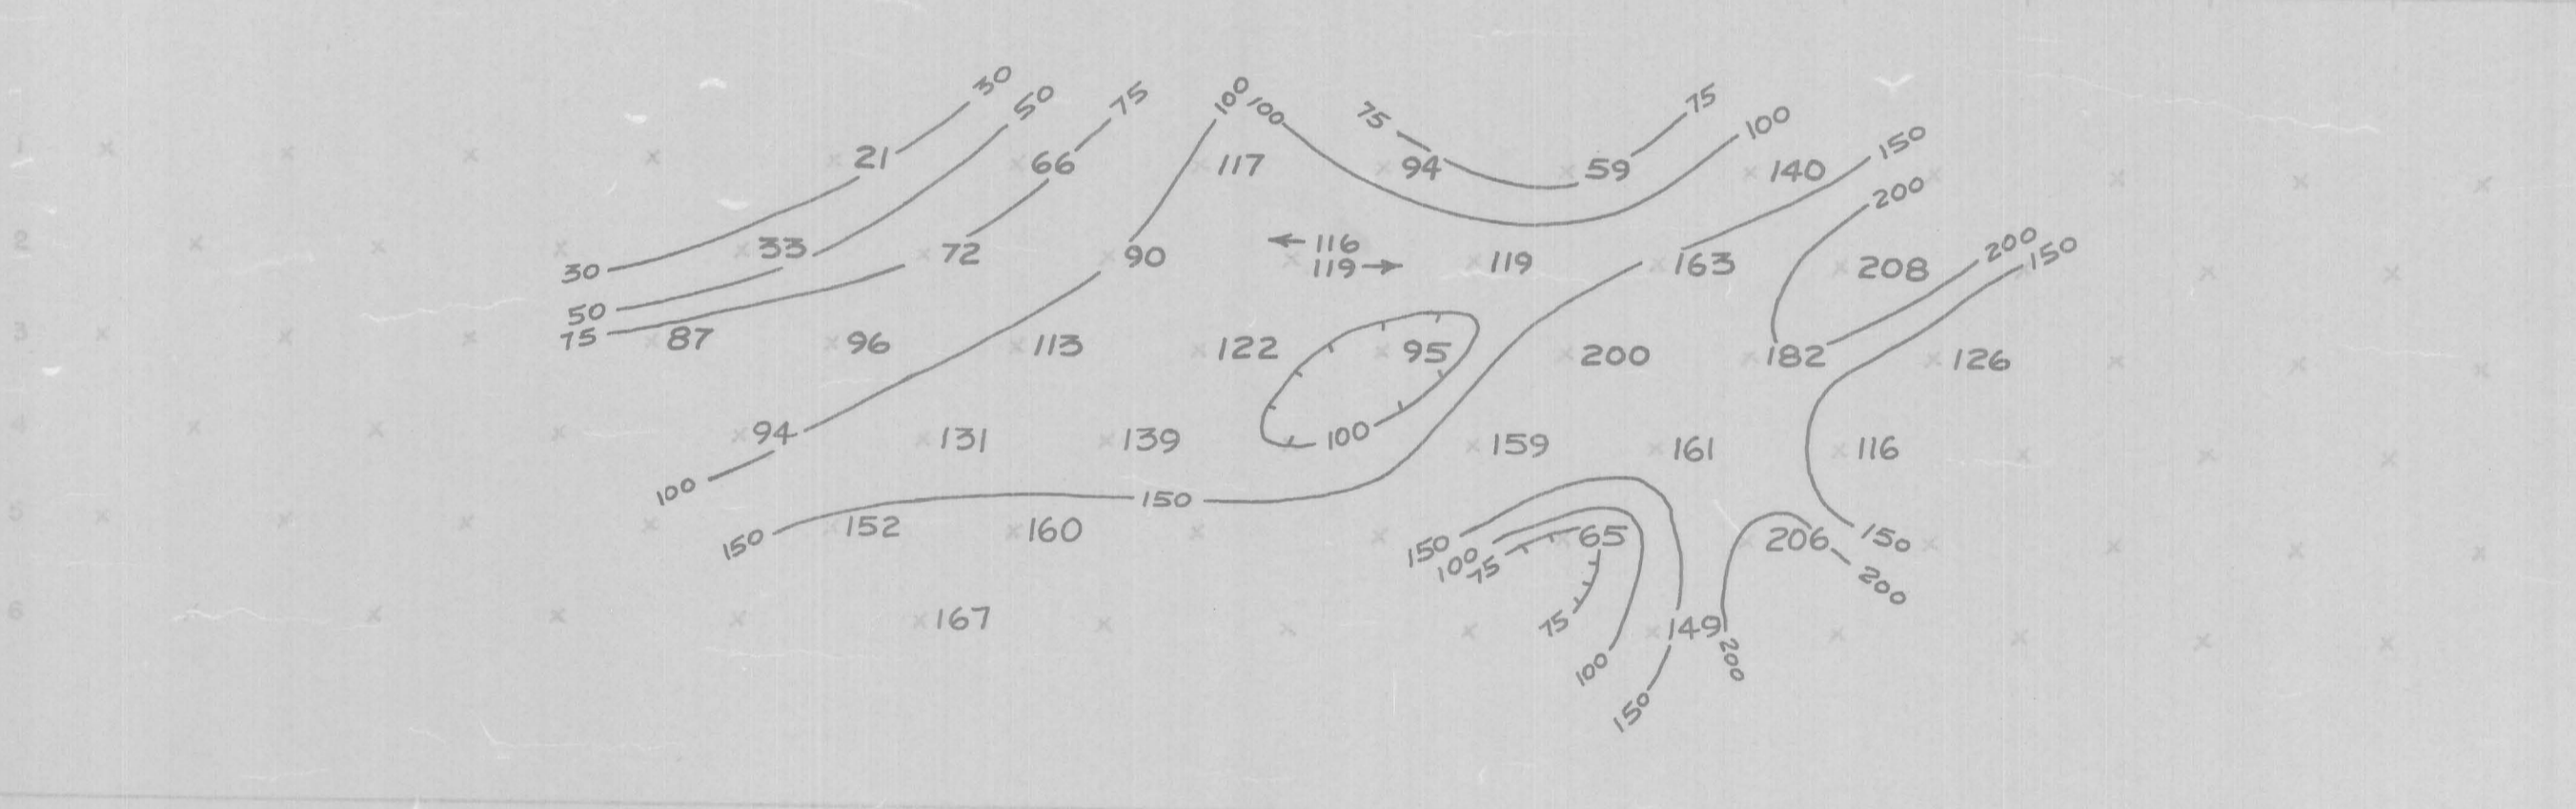

APPARENT METALLIC CONDUCTION FACTOR (MCF) CONTOUR INTERVAL LOGARITHMIC
 $MCF = \frac{PFE \times 1000}{\rho DC}$

SELF POTENTIAL SURFACE PROFILE GEOLOGY, ETC.

EXPLANATION



RELATIVE ANOMALY STRENGTH



SECTIONAL DATA SHEET

LINE No. Z-- Spread 1

INDUCED POLARIZATION TRAVERSE

DEMETRIE WASH PROJECT

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000'

DATE: March 1964

FOR

THE SUPERIOR OIL COMPANY
 MINERALS DIVISION
 TUCSON, ARIZONA