
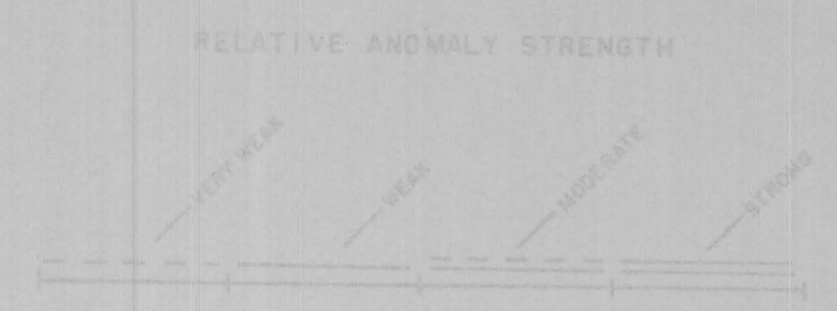


APPARENT RESISTIVITY (PDC)  
IN UNITS OF OHM FEET  
2 FT  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 cps

PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 3.0 cps

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
(MCF = PFE x 1,000 / PDC)  
CONTOUR INTERVAL LOGARITHMIC

EXPLANATION

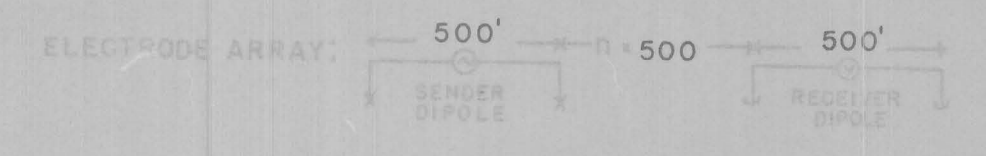

SECTIONAL DATA SHEET

LINE No. 2

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 500' DATE: MARCH 1964

FOR  
THE  
SUPERIOR OIL COMPANY  
MINERALS DIVISION

S.G. CLAIMS AREA  
PATAGONIA DISTRICT  
SANTA CRUZ COUNTY  
ARIZONA