



APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET $2\pi t$

CONTOUR INTERVAL LOGARITHMIC

SENDER FREQUENCY: 0.05 C.P.S.

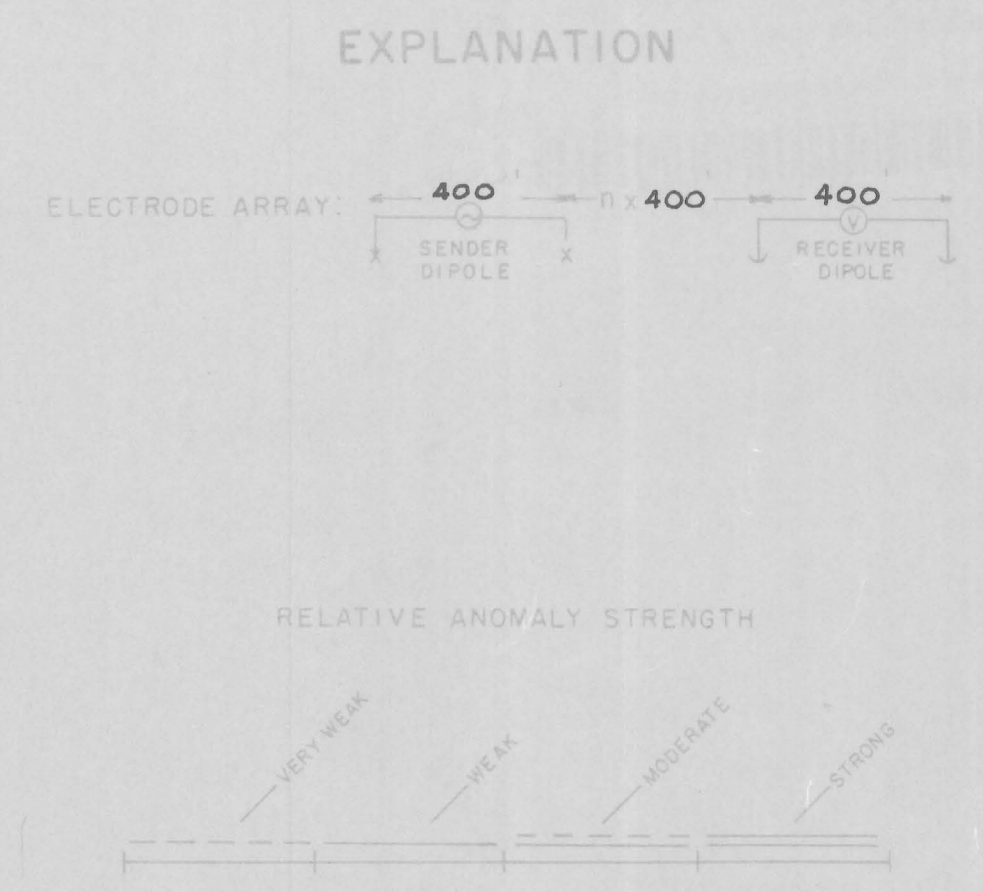

LOOKING Northeasterly

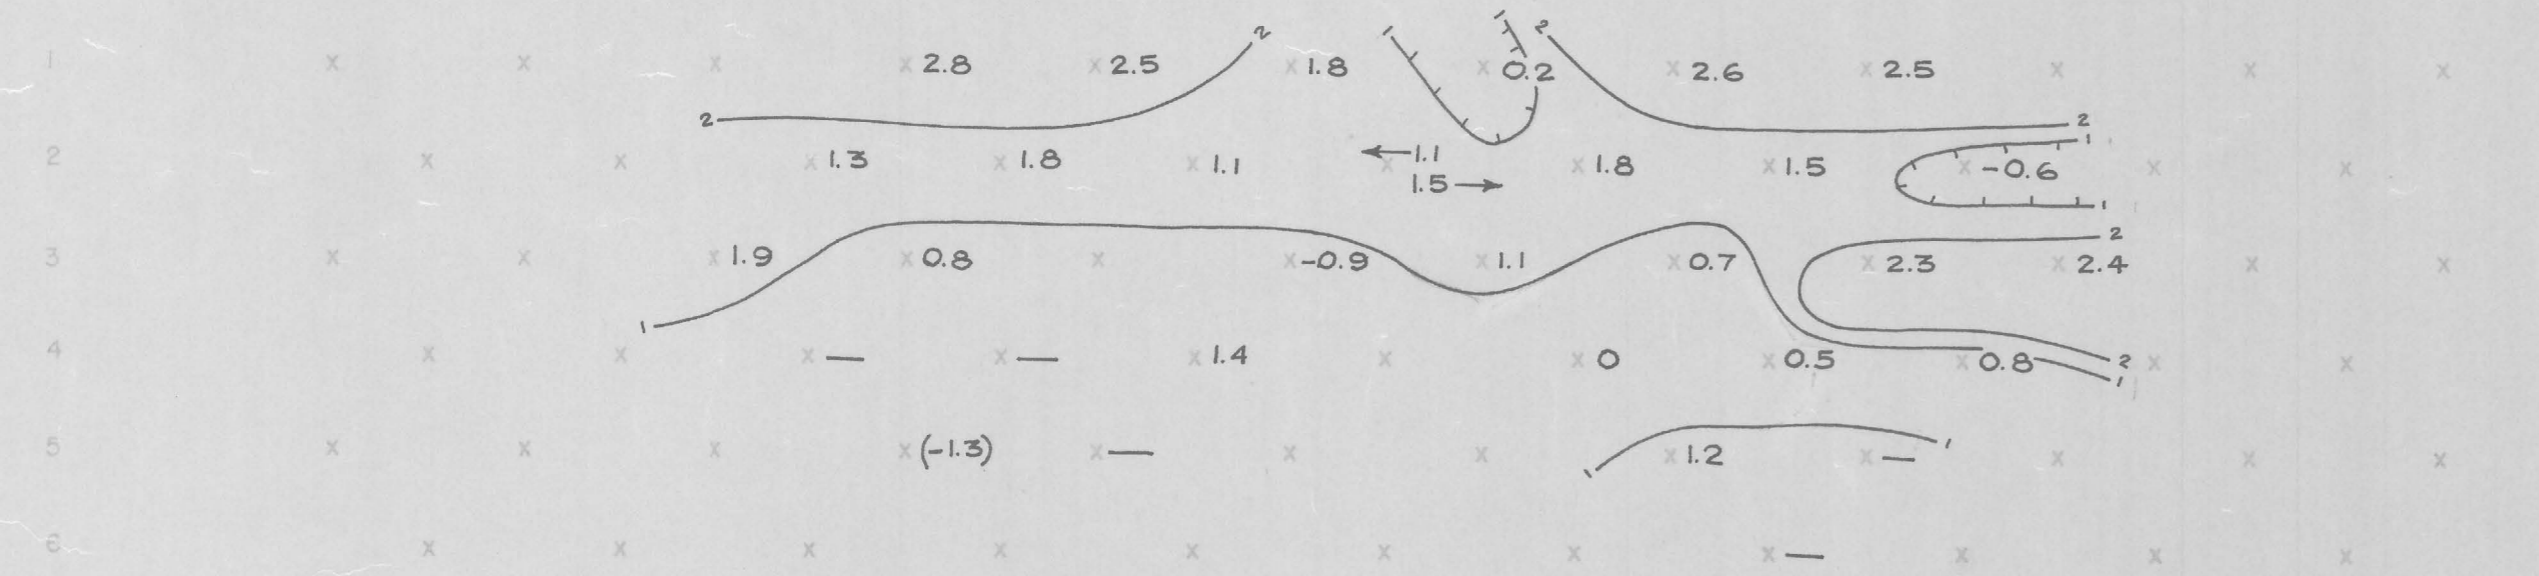

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT

SENDER FREQUENCIES: 0.05 & 3.0 C.P.S.


FOUR METALS AREA
SANTA CRUZ CO., ARIZONA

SECTIONAL DATA SHEET
LINE NO. 2

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 400' DATE: AUG. 1964

FOR
C. T. MOSES, JR.

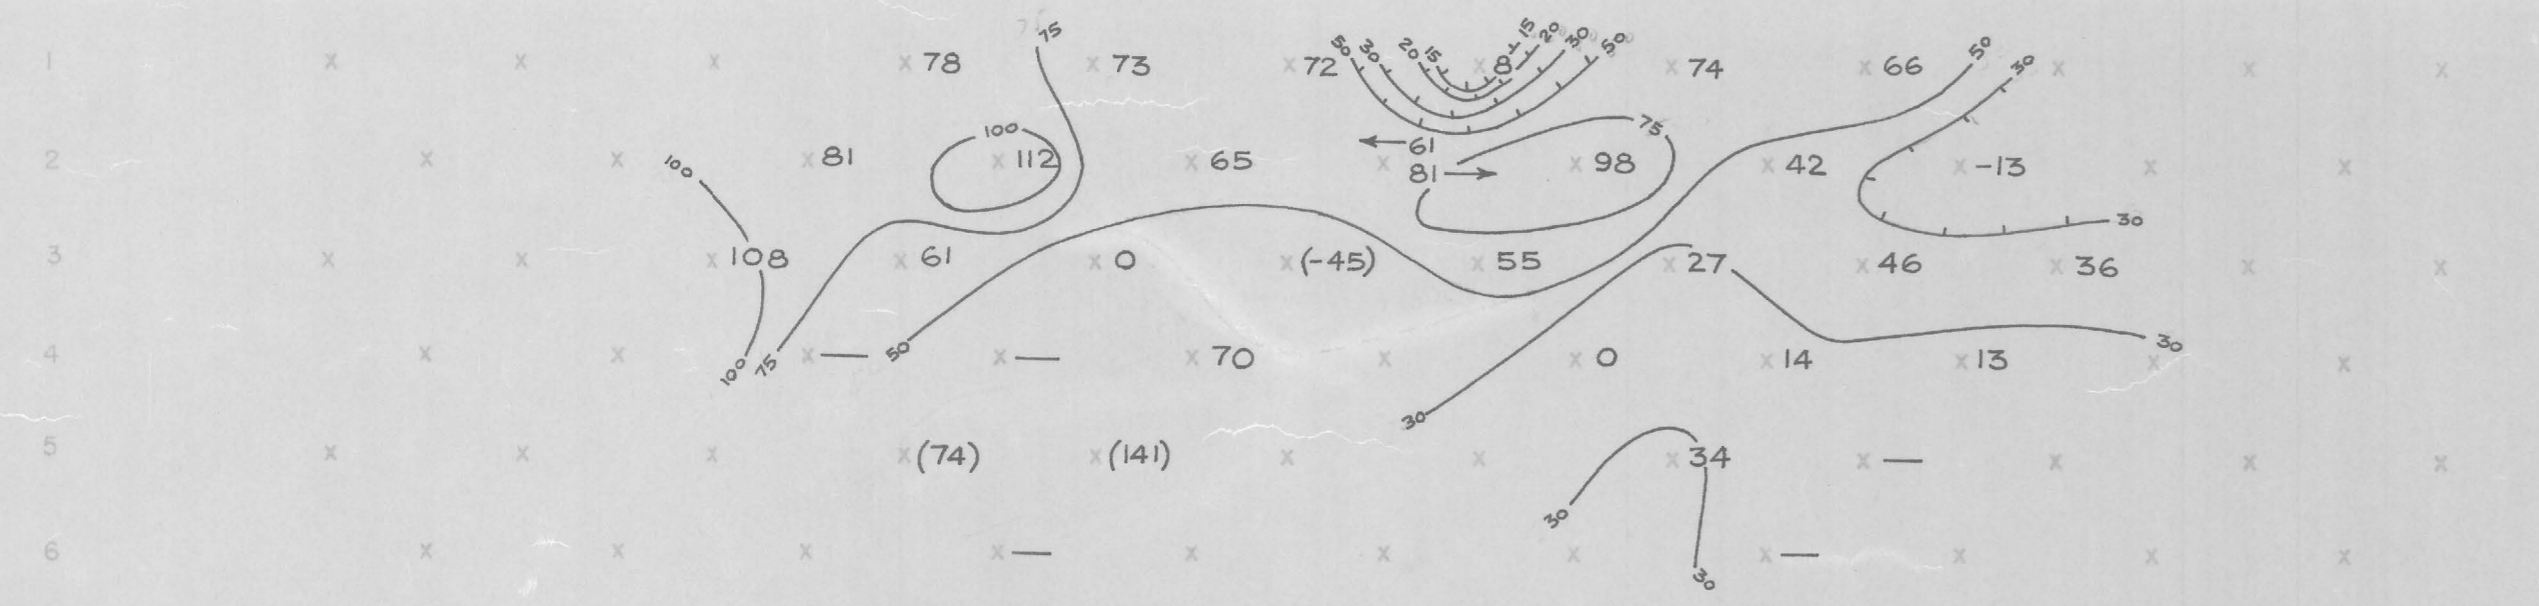

APPARENT "METALLIC CONDUCTION" FACTOR (MGF)
(MGF = $\frac{PFE \times 1000}{\rho_{DC} \times 2\pi t}$)

CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL
SURFACE PROFILE
GEOLOGY, ETC.