




PLAN VIEW 1
 (Showing drill holes in elevation)

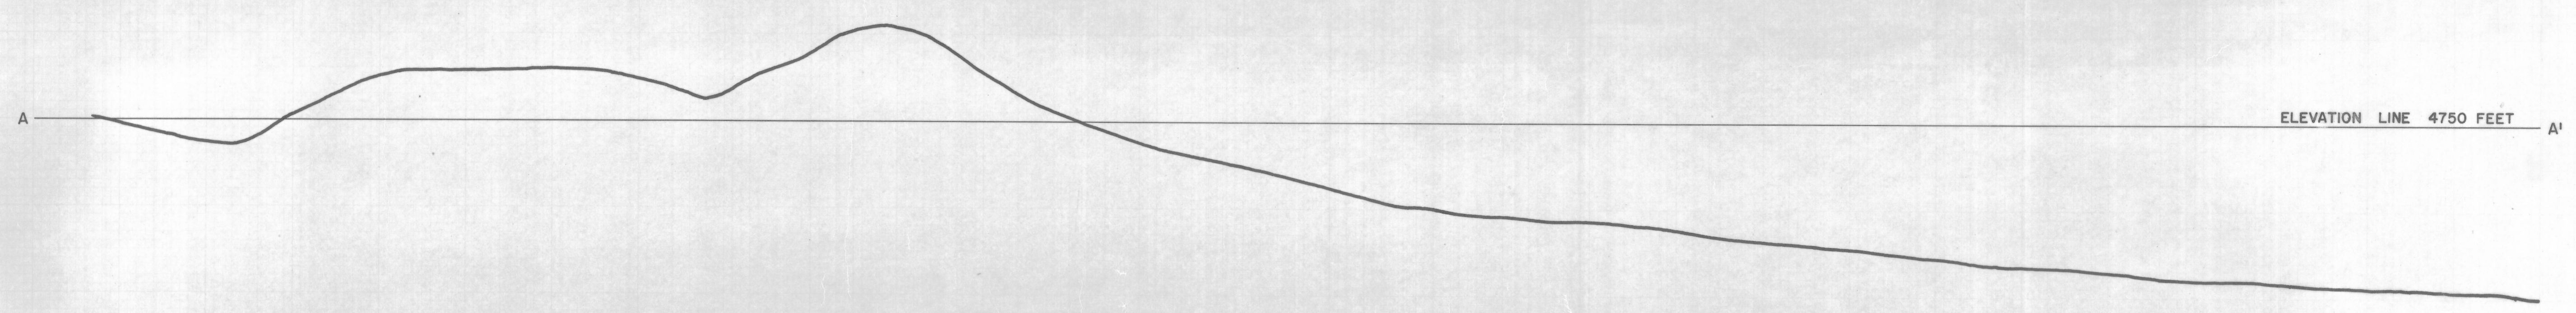


TOPOGRAPHIC PROFILE 1

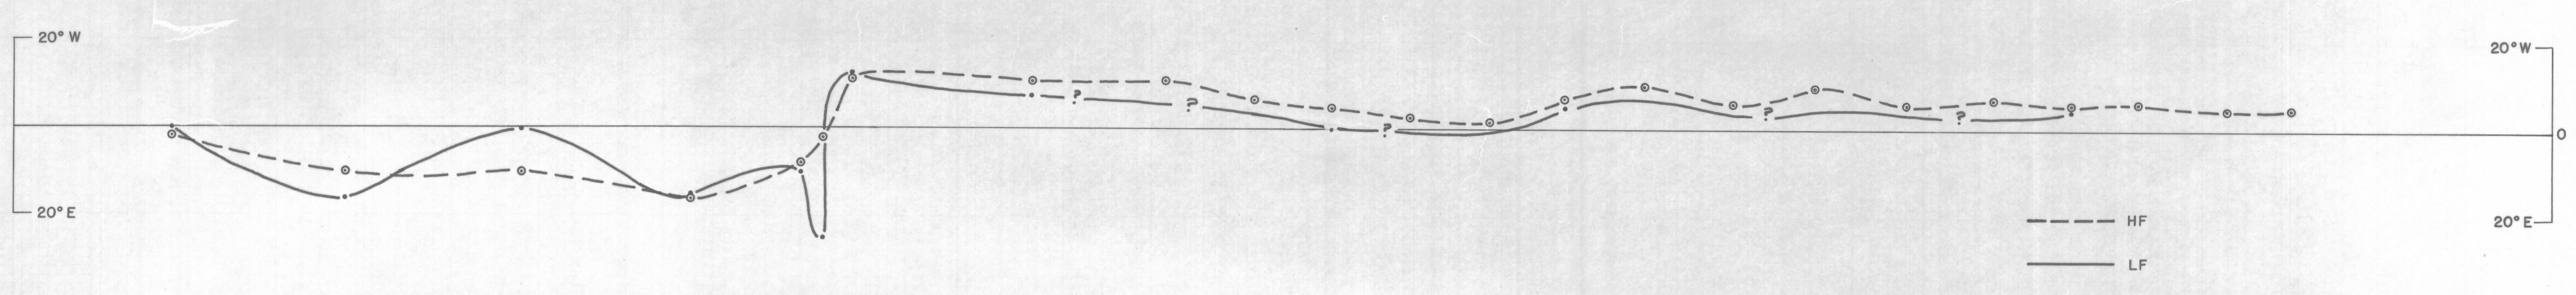


AFMAG TILT ANGLE PROFILE 1

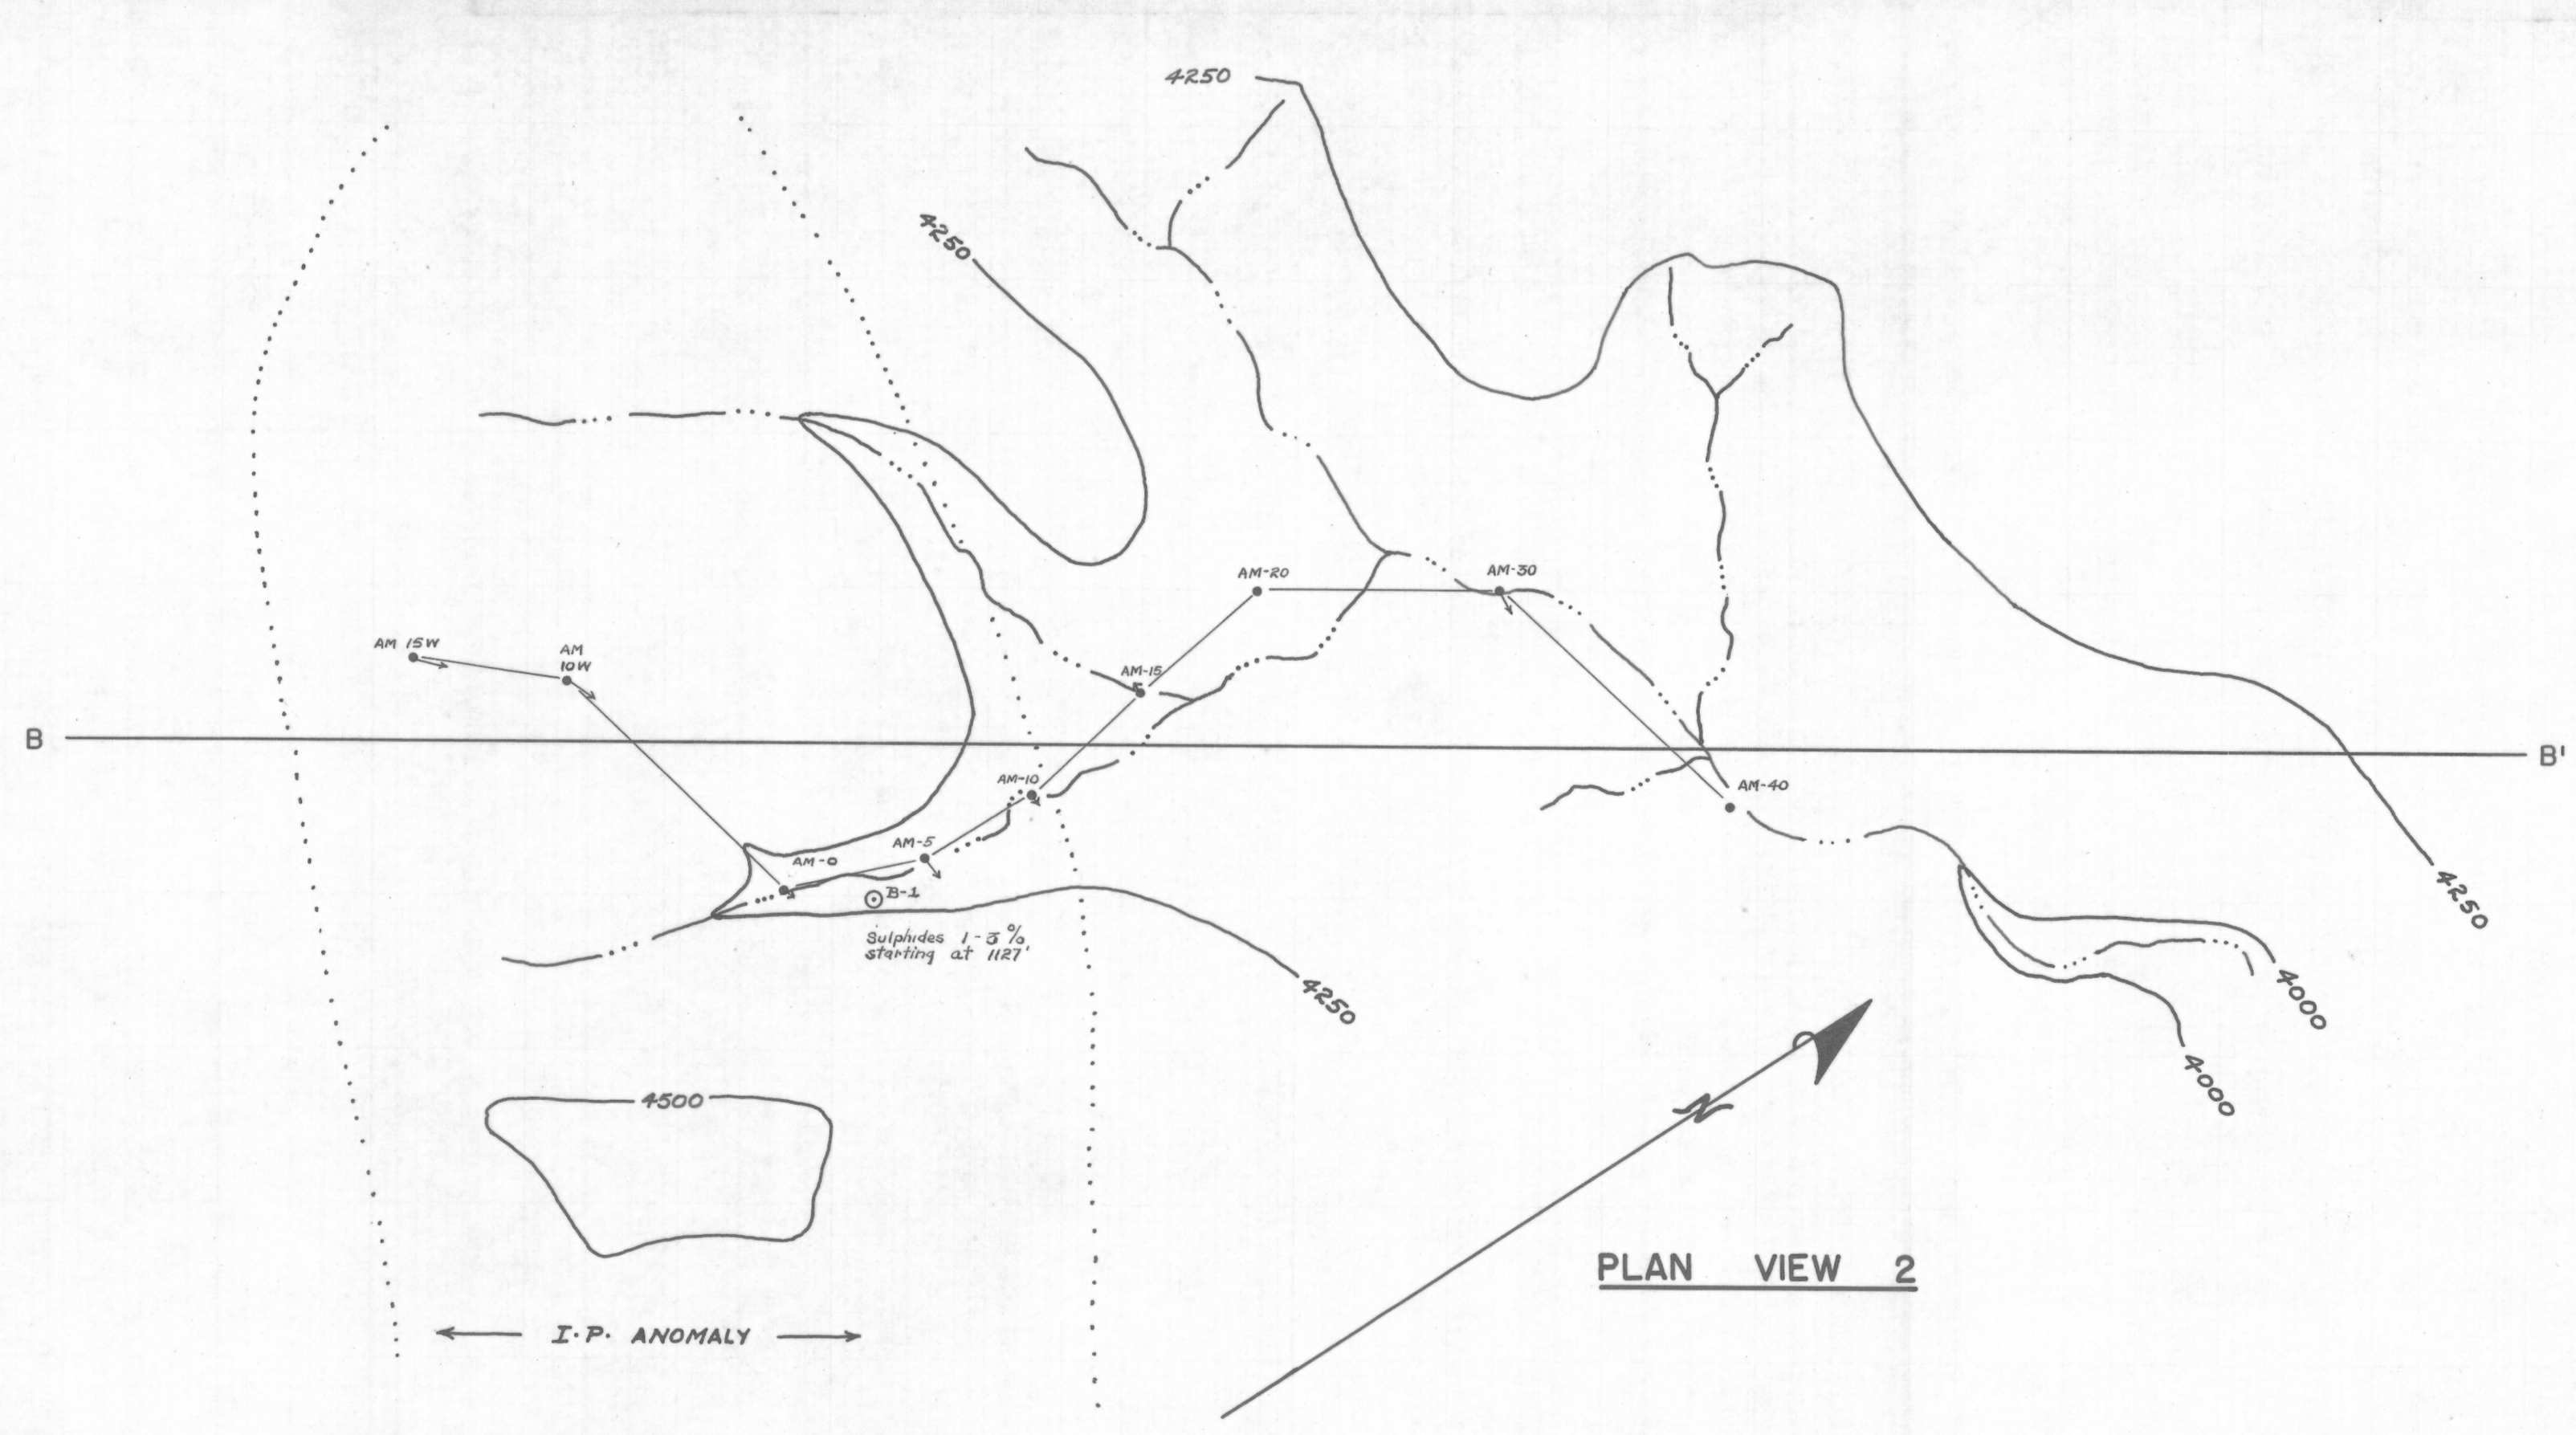

PLAN VIEW 2

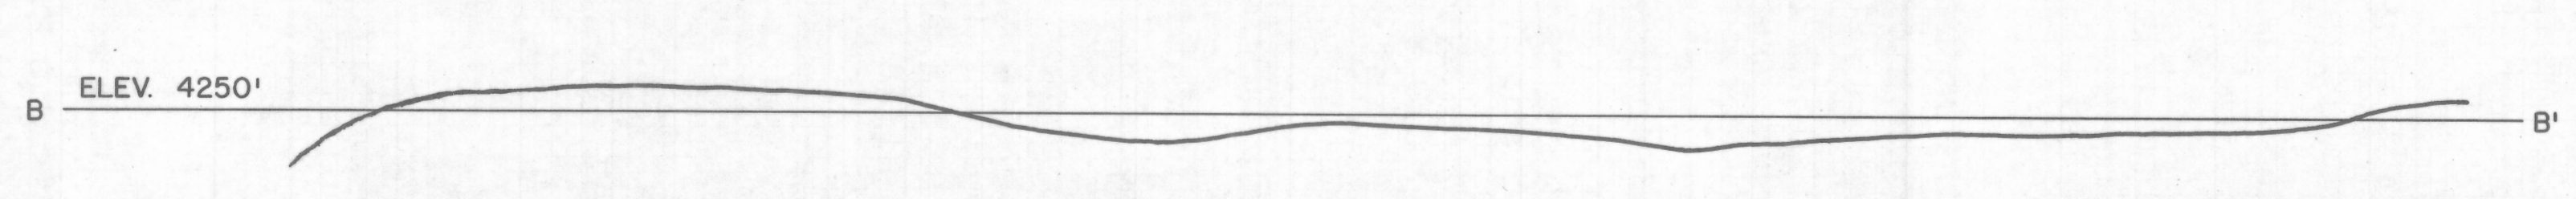

TOPOGRAPHIC PROFILE 2

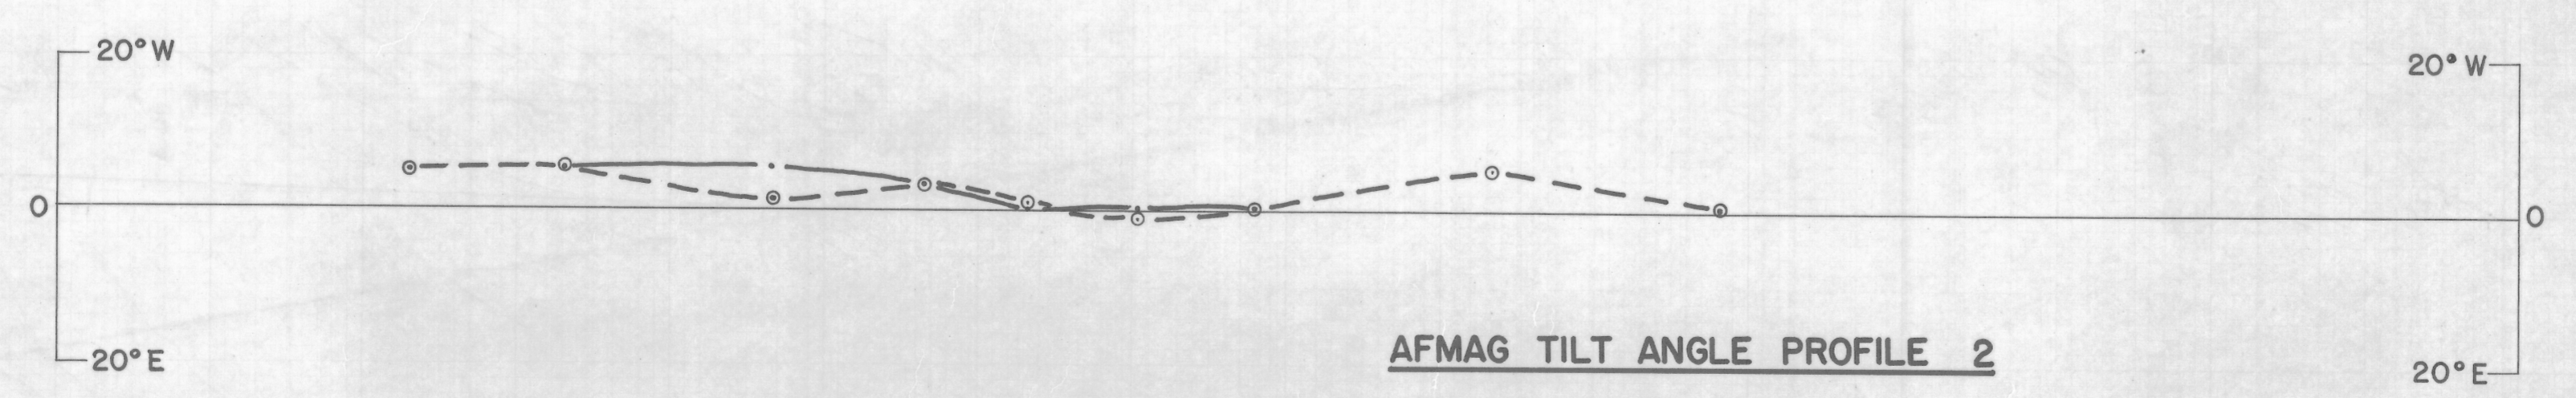

AFMAG TILT ANGLE PROFILE 2

- EXPLANATION**
- DRILL HOLE COLLAR LOCATION
 - AFMAG STATION & AZIMUTH, LENGTH OF ARROW INDICATES DEGREE OF TILT ON HF.
 - INDICATES DRILL HOLE SECTION ON PLAN VIEW.
 - HEAVY SULPHIDE - 1% - 6%.
 - MEDIUM SULPHIDE - 1% - 3%.
 - LIGHT SULPHIDE - 1% or less.
 - HIGH FREQ. 510 C.P.S.
 - LOW FREQ. 150 C.P.S.
 - SCALE 1" = 500'

JOINT AFMAG DEMONSTRATION TEST
 BEAR CREEK MINING COMPANY
 SAFFORD PROJECT, GRAHAM COUNTY, ARIZONA
 JUNE, 1959

IN CONJUNCTION WITH AND FOR
 CHAPMAN, WOOD & GRISWOLD, ALBUQUERQUE, NEW MEXICO

CONSULTANTS:
 OPERATION & INTERPRETATION: DR. STANLEY WARD, BERKELEY, CALIFORNIA
 OPERATION & COMPILATION & INTERPRETATION: HEINRICHS GEOEXPLORATION CO., TUCSON, ARIZONA