


ELECTRODES SURFACE STATIONS 15NW 12.5 10 7.5 5 2.5 0-NW/SE 2.5 5 7.5 10 12.5 15SE SURFACE

INTERVAL BETWEEN SENDER & RECEIVER DIPOLES




APPARENT RESISTIVITY (ρ_a) IN UNITS OF OHM FEET FT. CONTOUR INTERVAL LOGARITHMIC SENDER FREQUENCY: 0.05 cps.

EXPLANATION

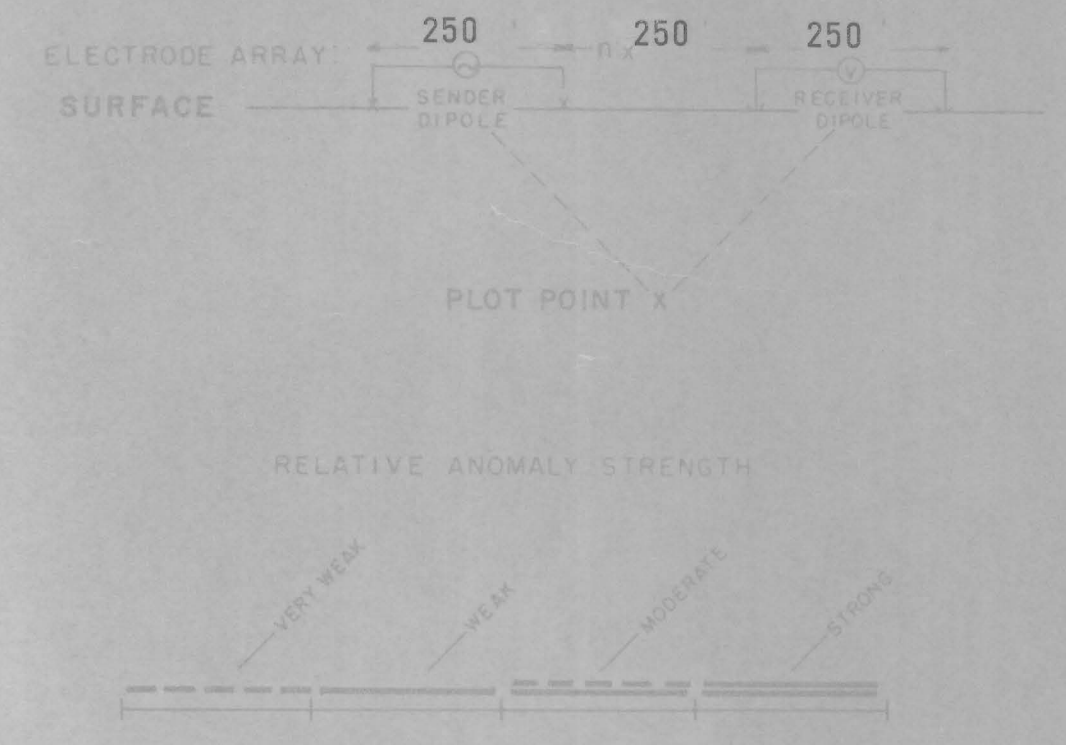


LOOKING N 55° E

SURFACE ? SURFACE

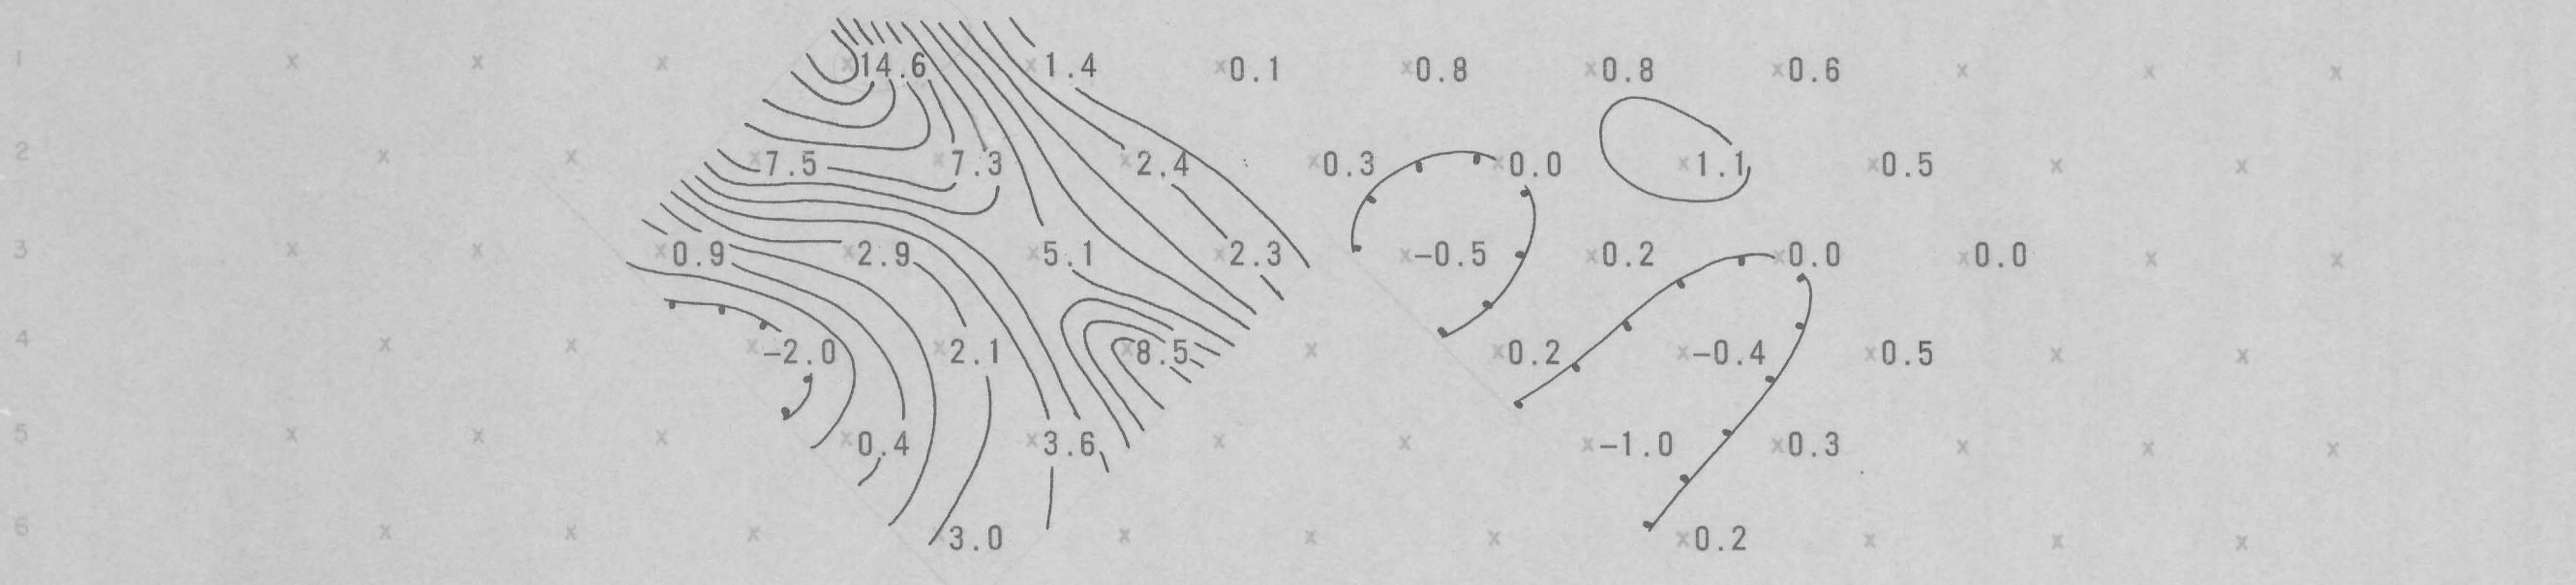

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT SENDER FREQUENCIES: 0.05 & 3.0 cps.

SURFACE SURFACE

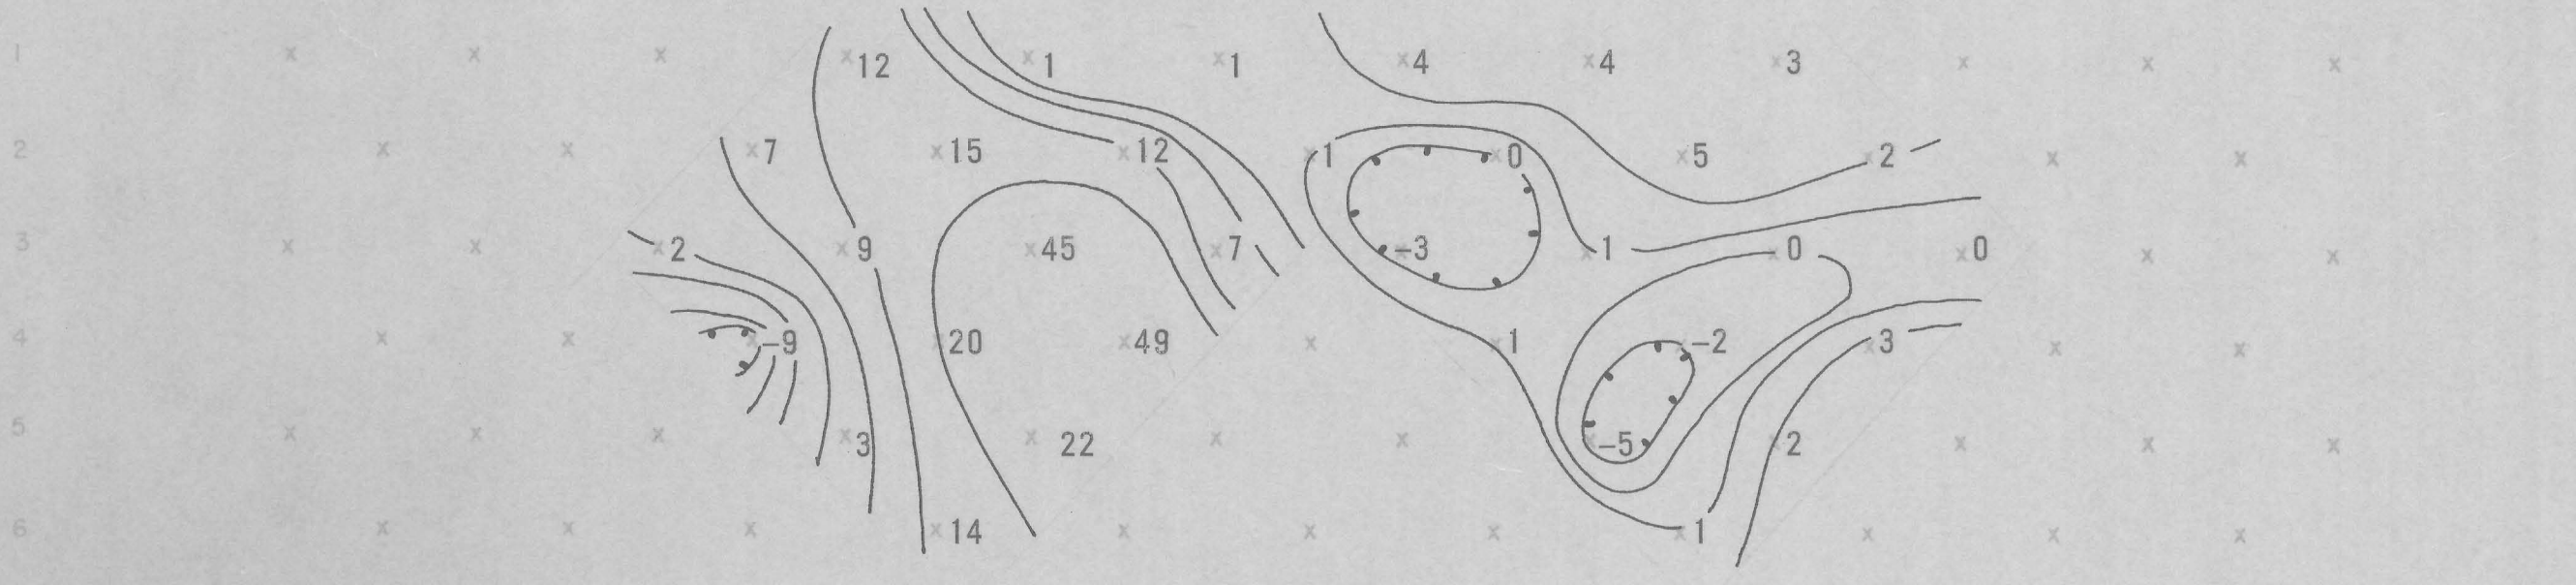

APPARENT "METALLIC CONDUCTION" FACTOR (MCF) (MCF = $\frac{PFE \times 1000}{\rho_{0.05} \rho_{3.0}}$) CONTOUR INTERVAL LOGARITHMIC

WILLIE ROSE AREA.

SECTIONAL DATA SHEET


LINE NO. 3

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 250' DATE: DEC 1967

FOR MR. WOODLIEF F. BROWN.

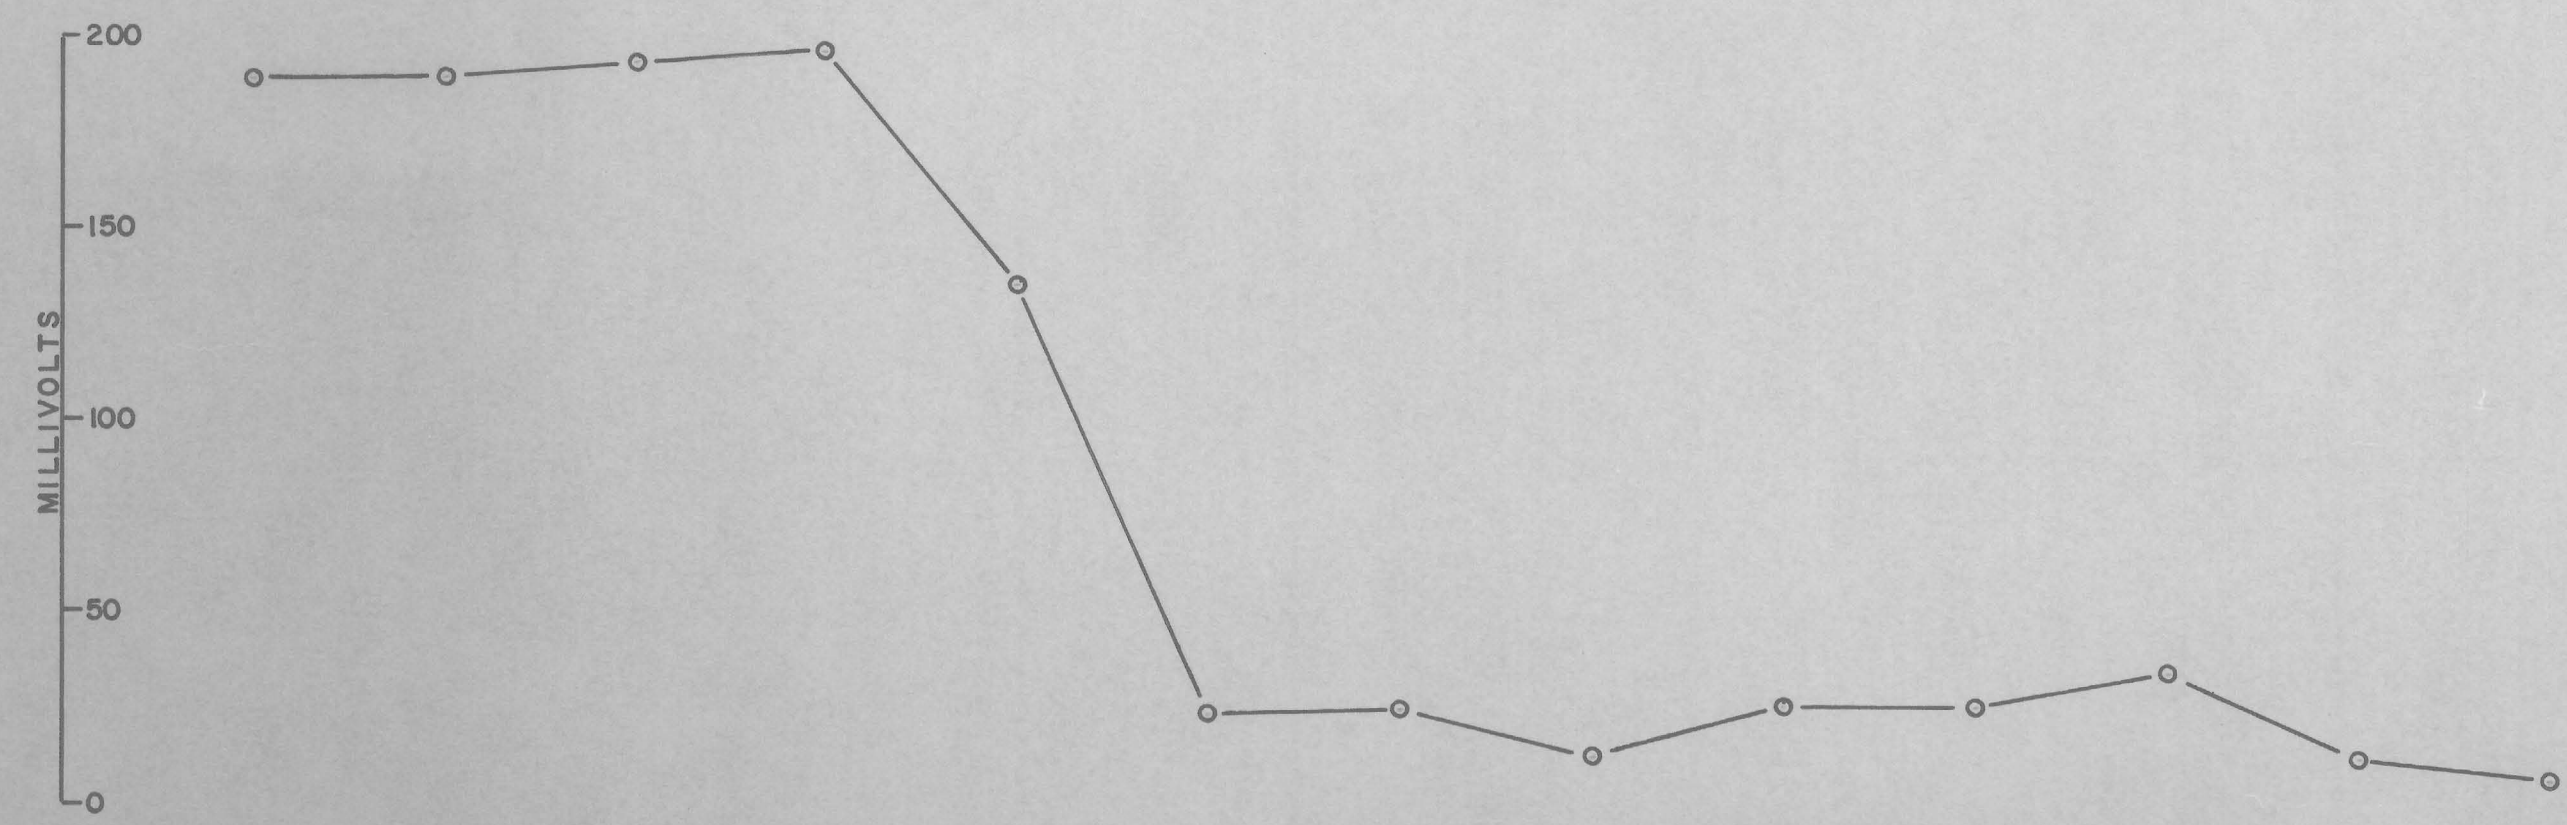

SELF POTENTIAL