



ELECTRODES SURFACE STATIONS 30SW 25 20 15 10 5 0-NE/SW 5 10 15 20 25 30NE SURFACE

Δ INTERVAL BETWEEN SENDER & RECEIVER DIPOLES

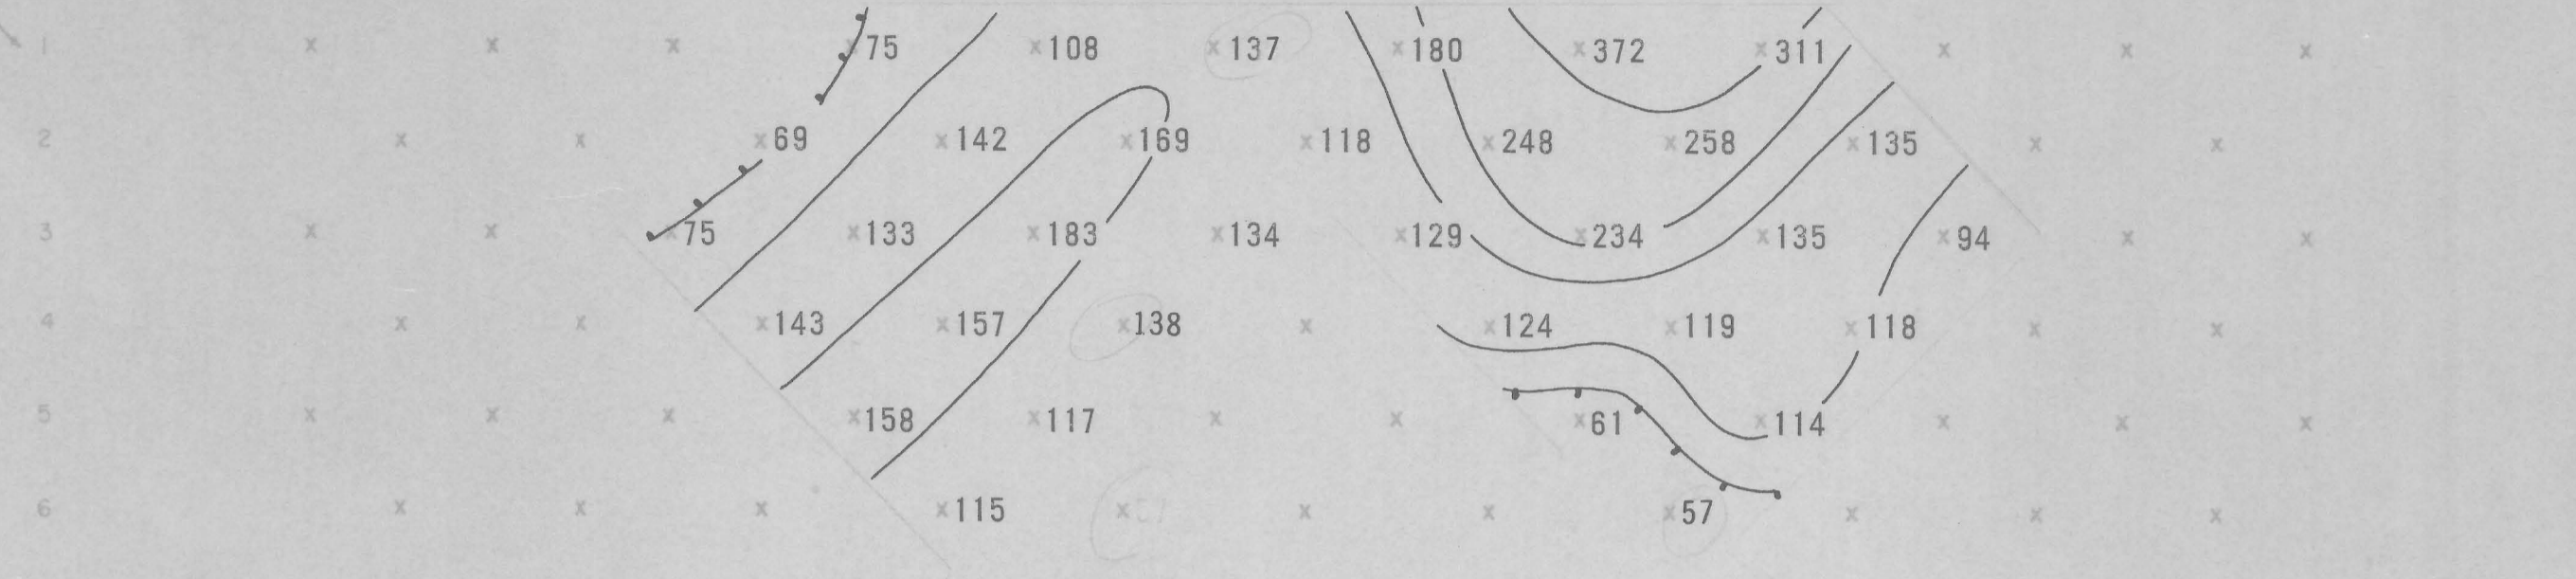


APPARENT RESISTIVITY (ρ_a) IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 C.P.S.

EXPLANATION

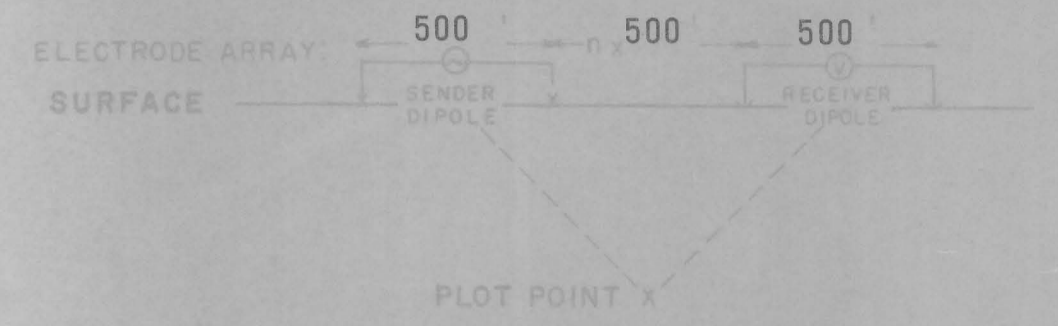


RELATIVE ANOMALY STRENGTH

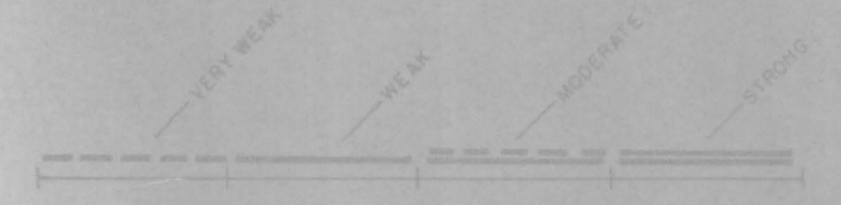


LOOKING N 30° W

SURFACE SURFACE

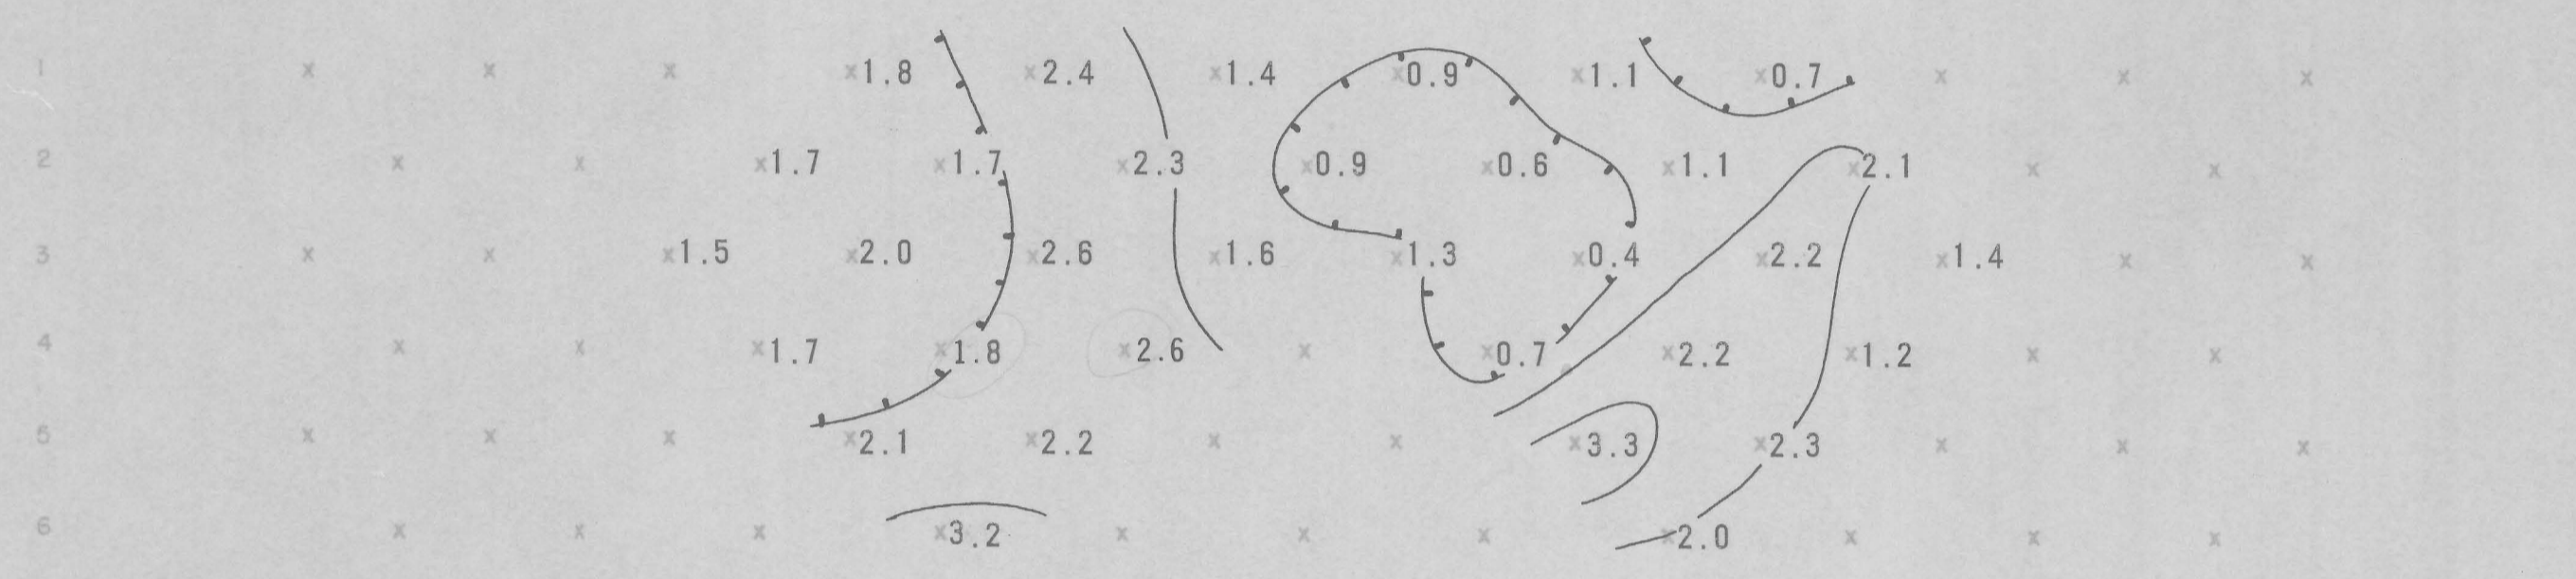

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 C.P.S.

SURFACE SURFACE

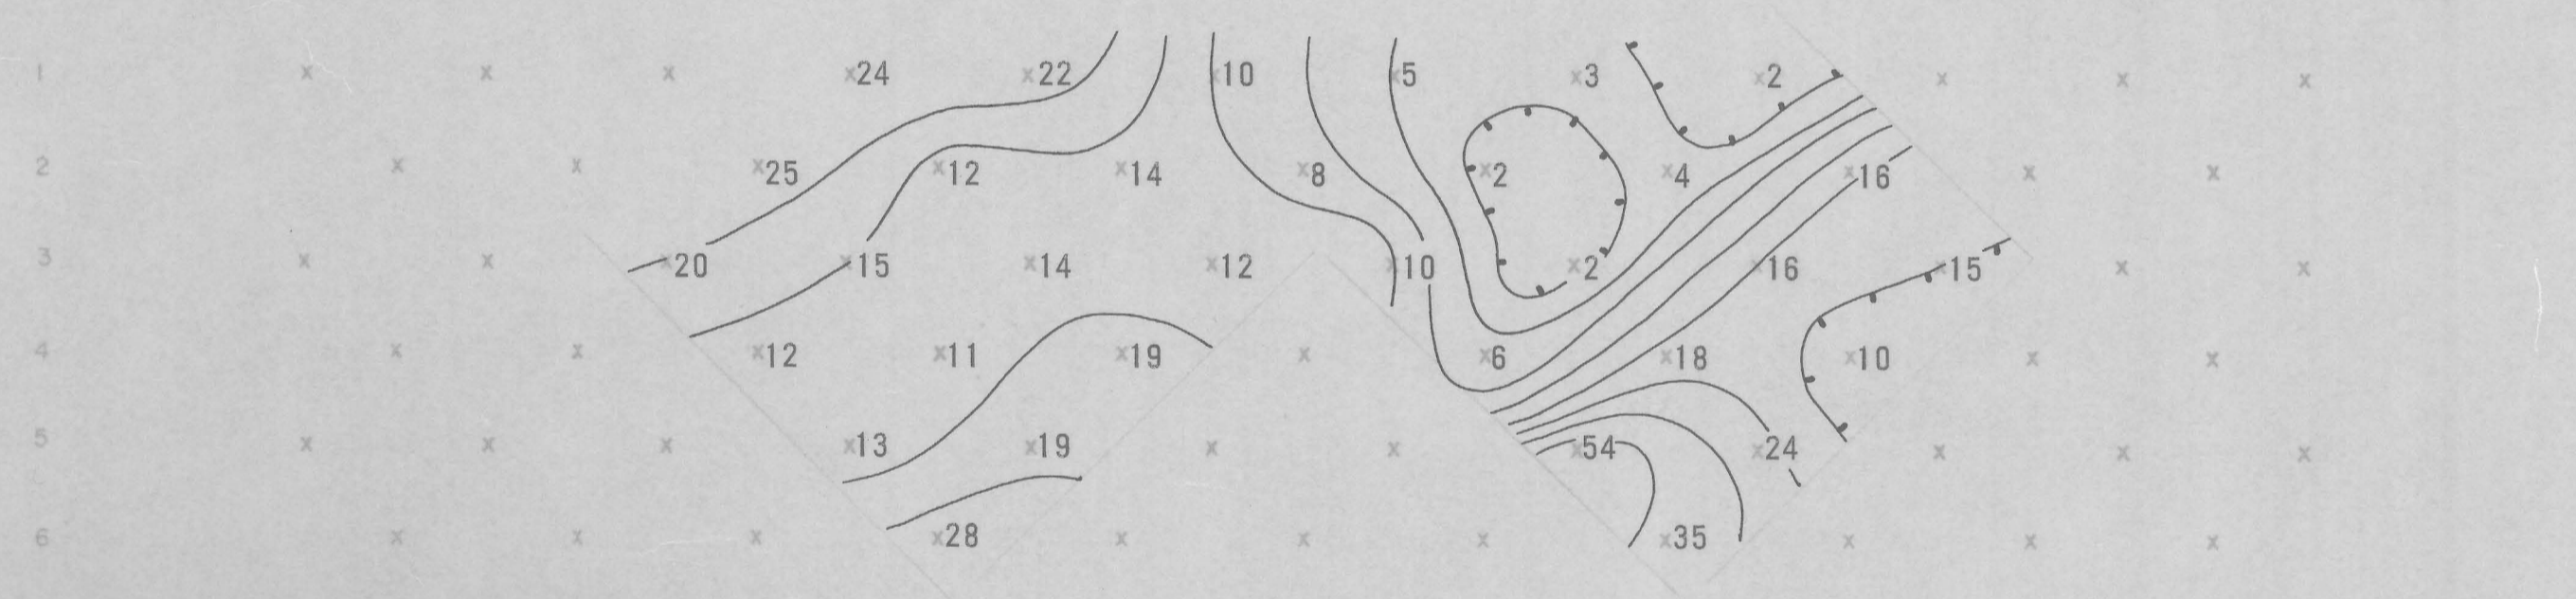

APPARENT 'METALLIC CONDUCTION' FACTOR (MCF) (MCF = $\frac{PFE \times 1000}{\rho_a \Delta}$)
CONTOUR INTERVAL LOGARITHMIC

WILLIE ROSE AREA.
SECTIONAL DATA SHEET
LINE NO. 1
INDUCED POLARIZATION TRAVERSE
HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 500' DATE: DEC 1967

FOR
MR. WOODLIEF F. BROWN.

SELF POTENTIAL

