

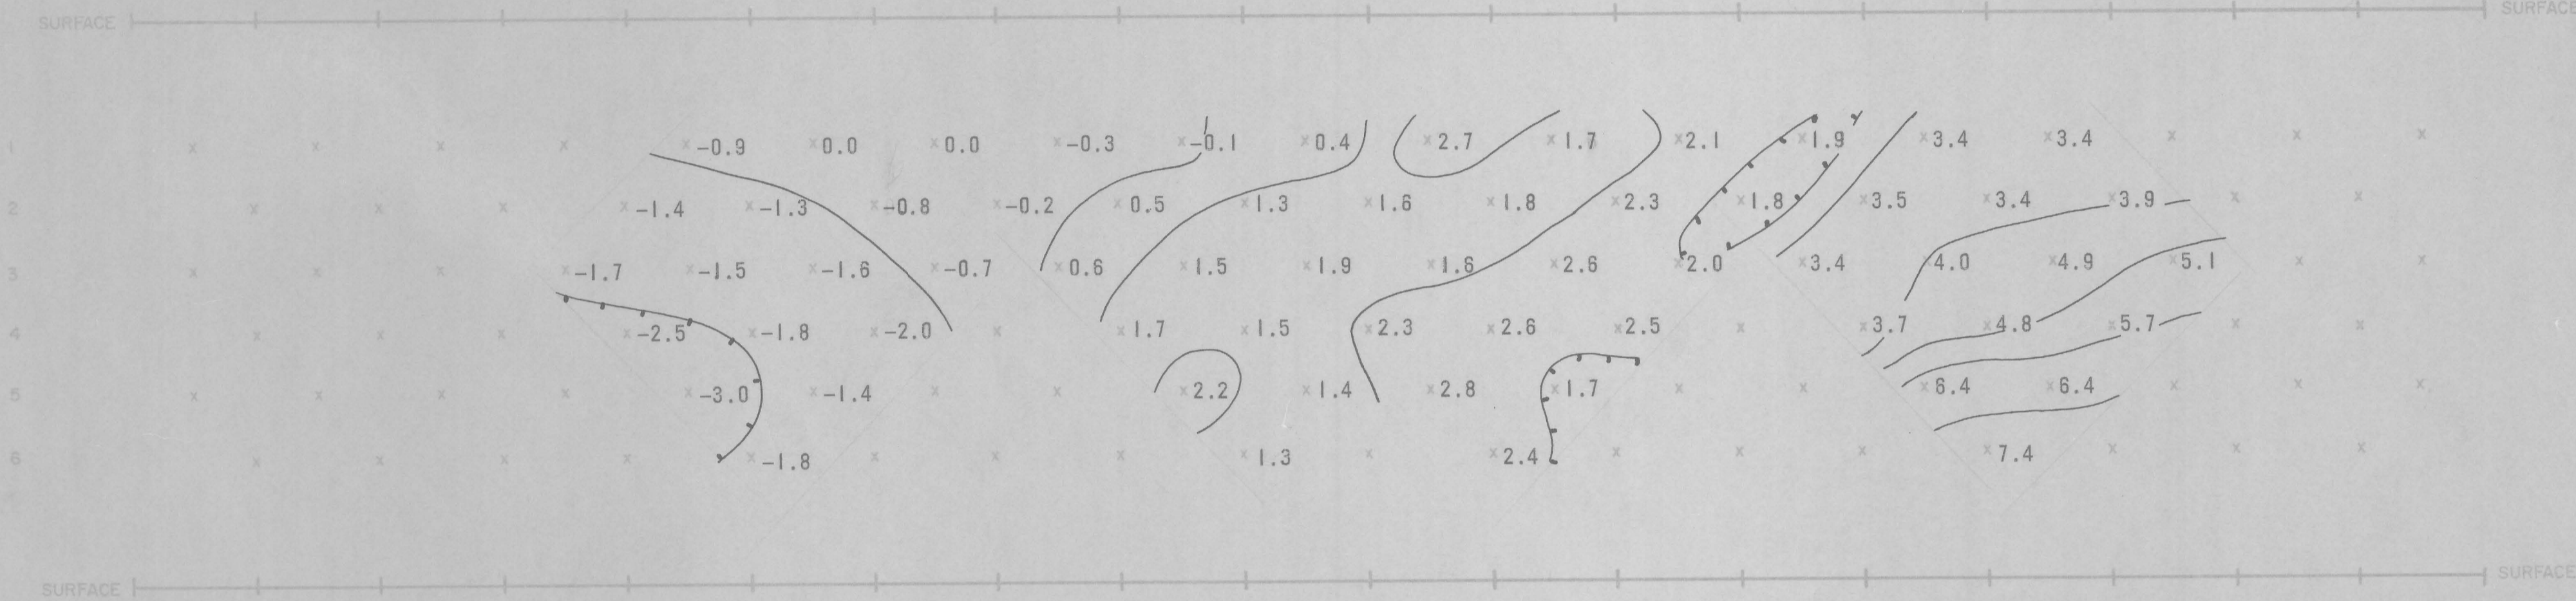


APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET (1)
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 C.P.S.

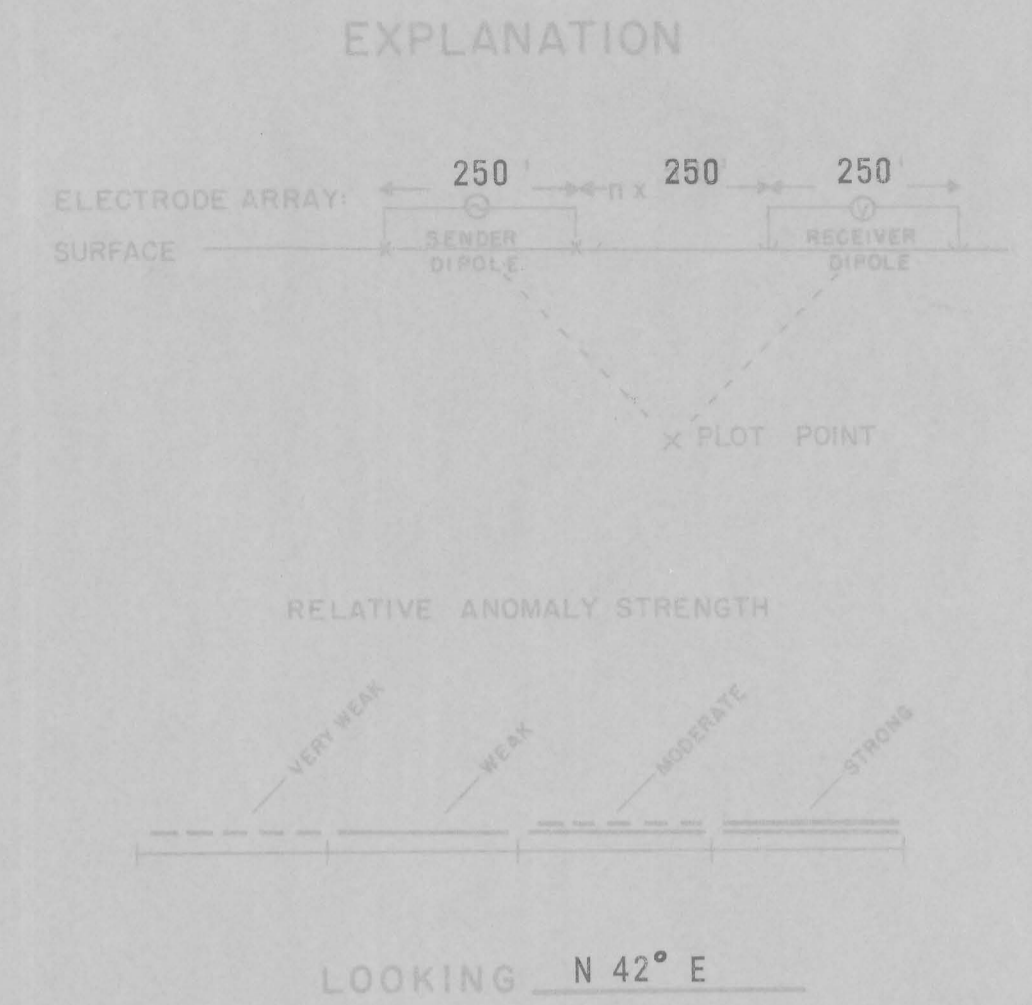


PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 C.P.S.

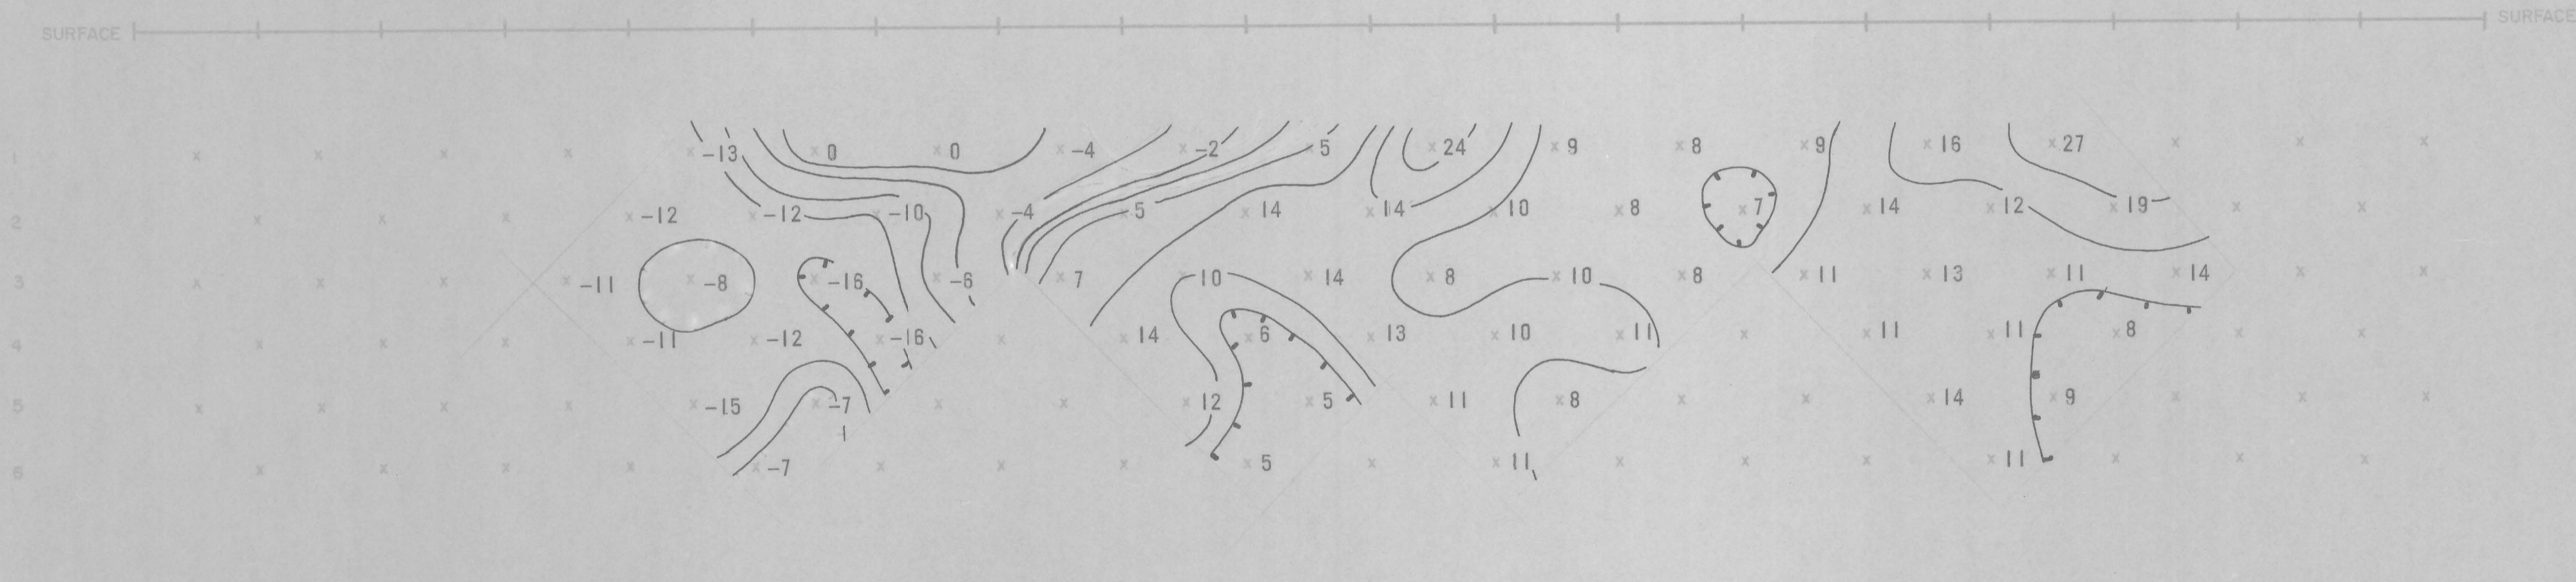

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
(MCF = PFE x 1000)
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

100
50
0
MILLIVOLTS

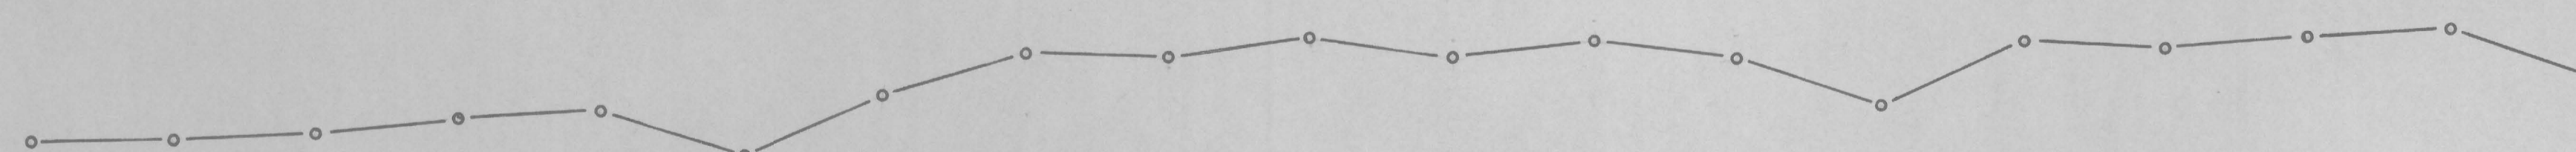

JOHNSON CAMP AREA
SECTIONAL DATA SHEET
LINE NO. 1 (SPREADS 1 & 2)
INDUCED POLARIZATION TRAVERSE
HEINRICH'S GEOEXPLORATION COMPANY
SCALE: 1" = 250' DATE: OCT 1968
FOR
CONTINENTAL EXPLORATION CORP.

