


APPARENT RESISTIVITY (ρ_a)
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 cps


EXPLANATION




RELATIVE ANOMALY STRENGTH

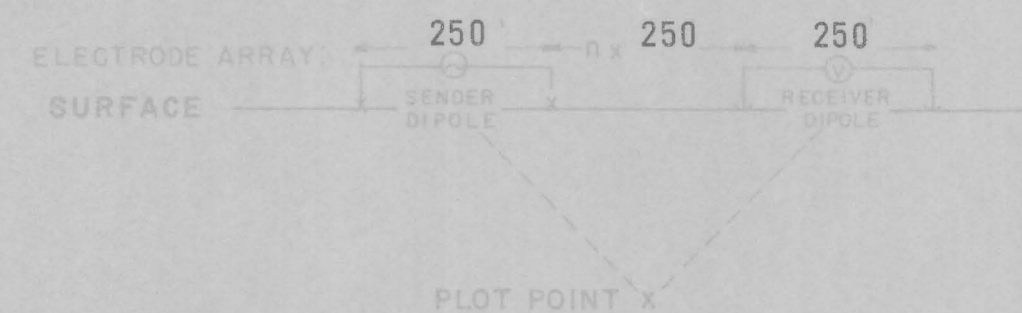

LOOKING N 35° W

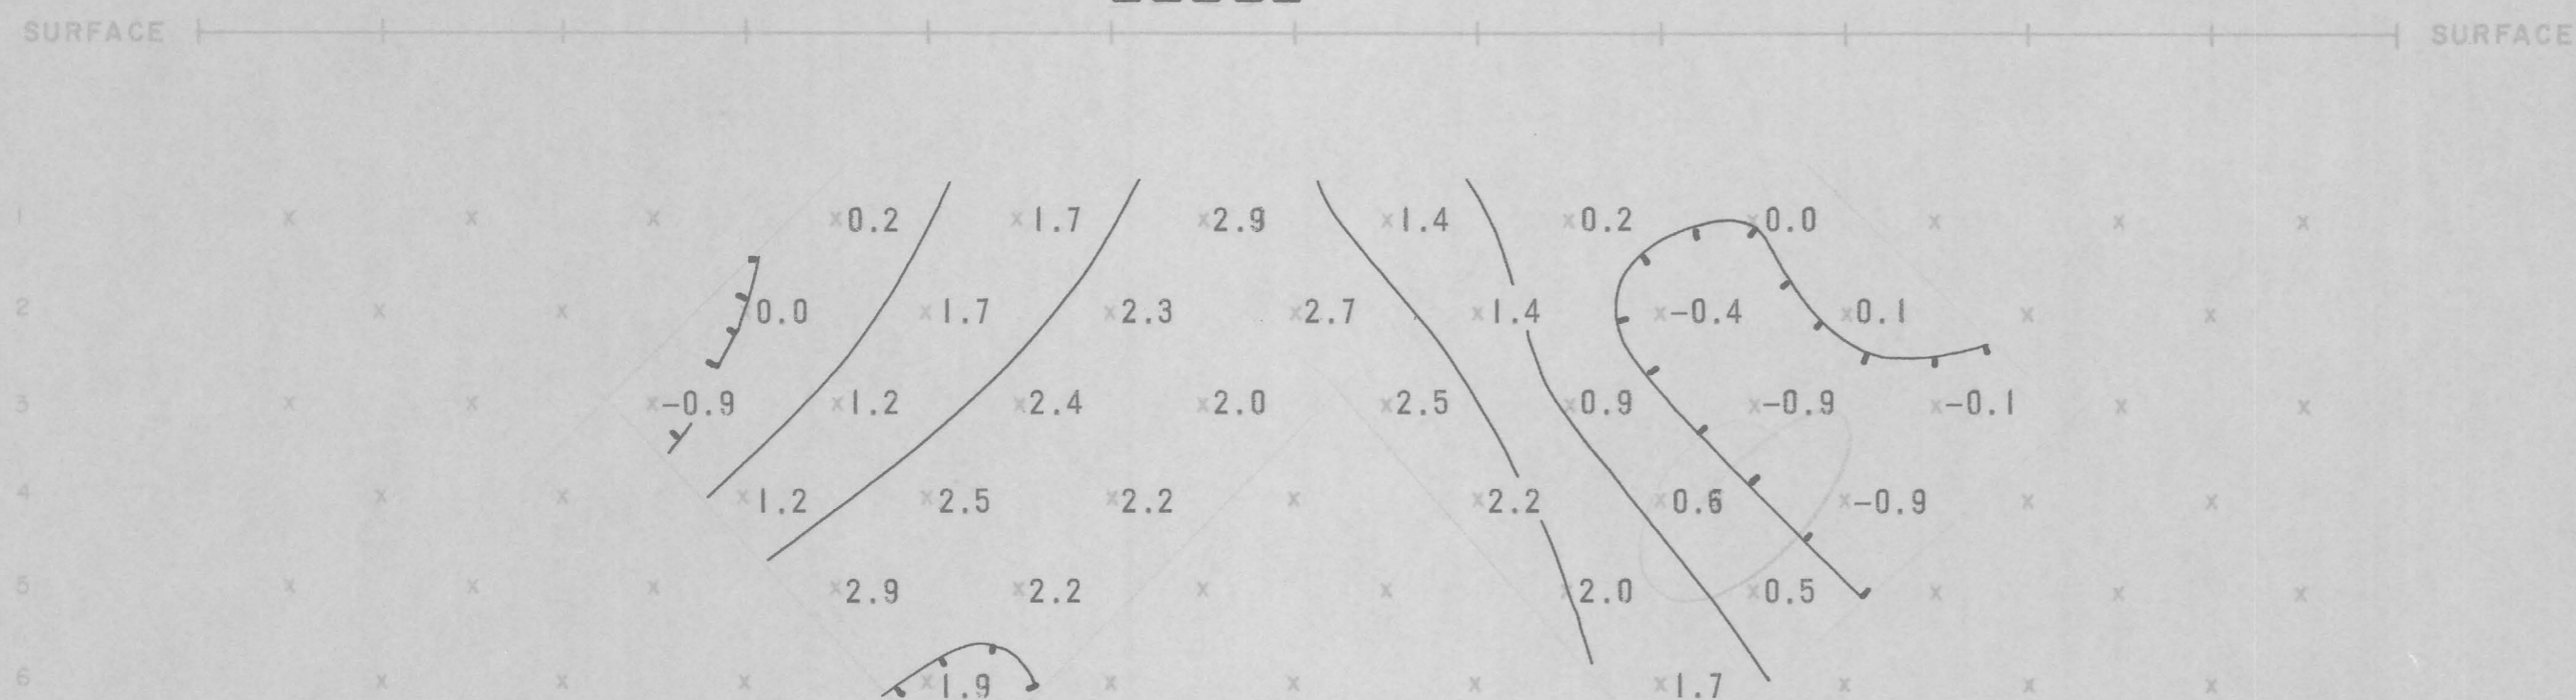

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 cps

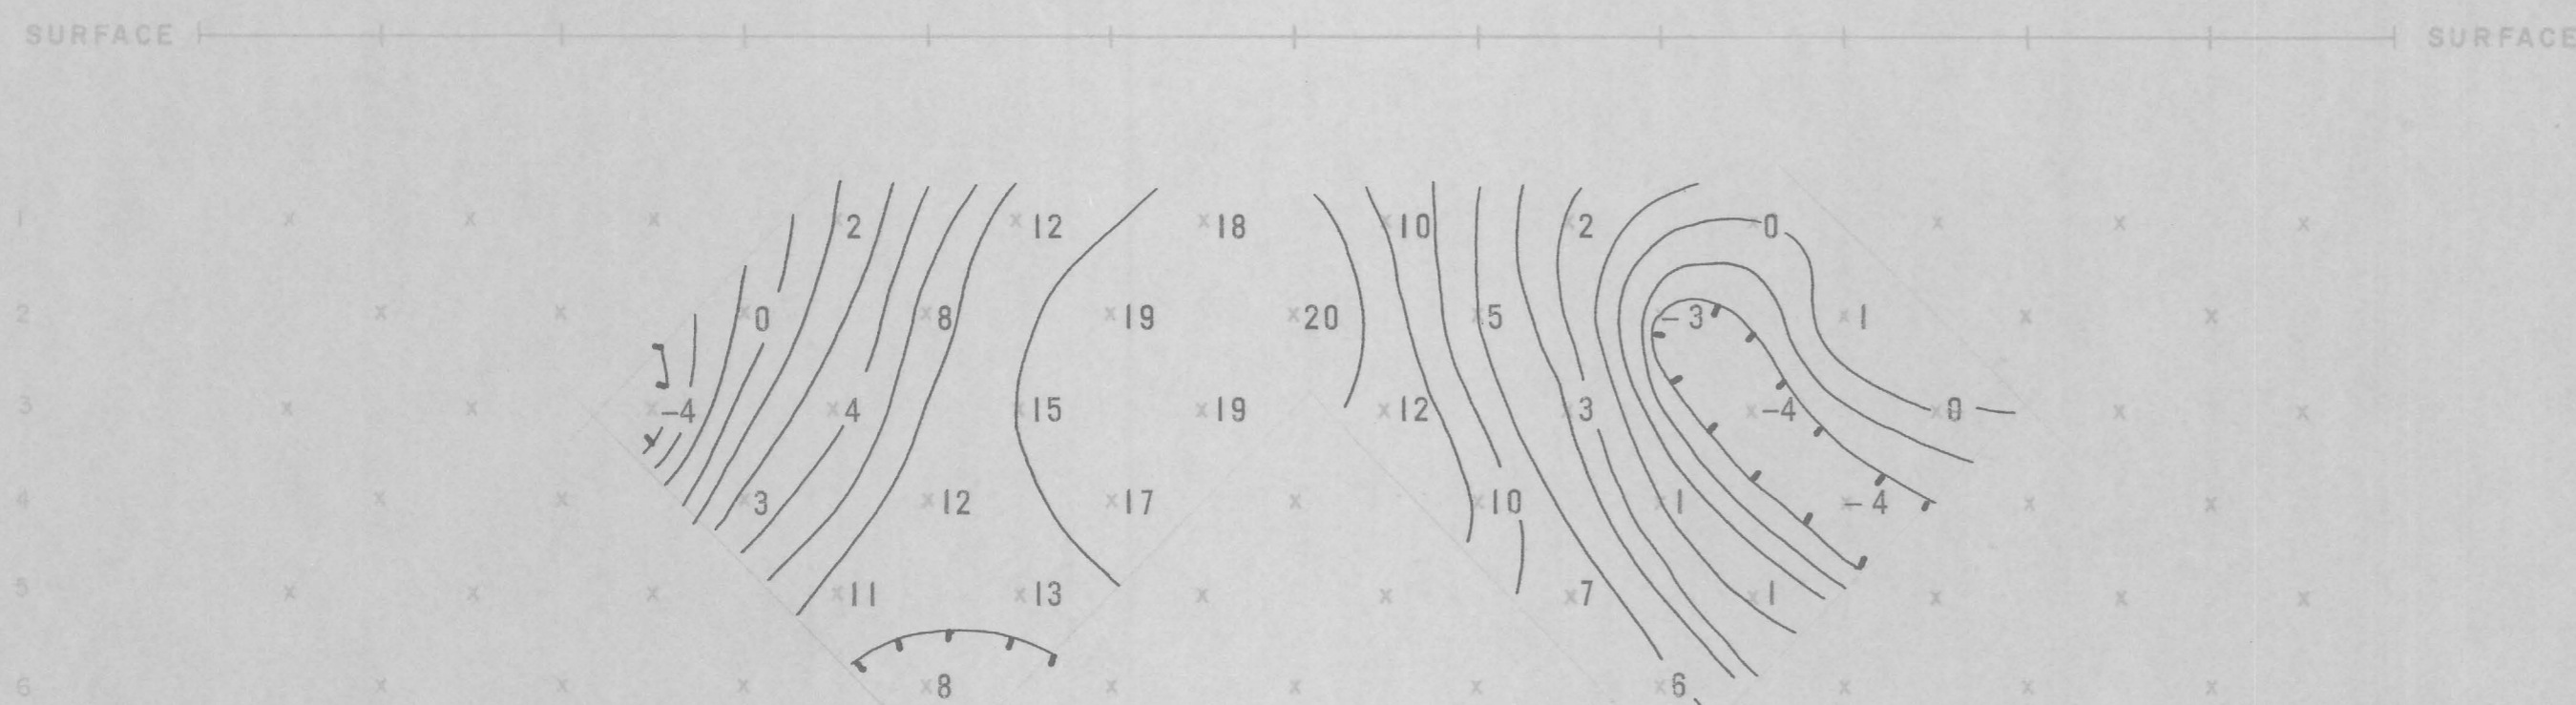

APPARENT METALLIC CONDUCTANCE FACTOR (MGF)
(MGF = $\frac{\rho_a}{\rho} \times 1000$)
CONTOUR INTERVAL LOGARITHMIC

JOHNSON CAMP AREA

SECTIONAL DATA SHEET

LINE NO. 3 (SPREAD 1)

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE, 1" = 250'

DATE: OCT 1968

FOR

CONTINENTAL EXPLORATION CORP.

SELF POTENTIAL

