
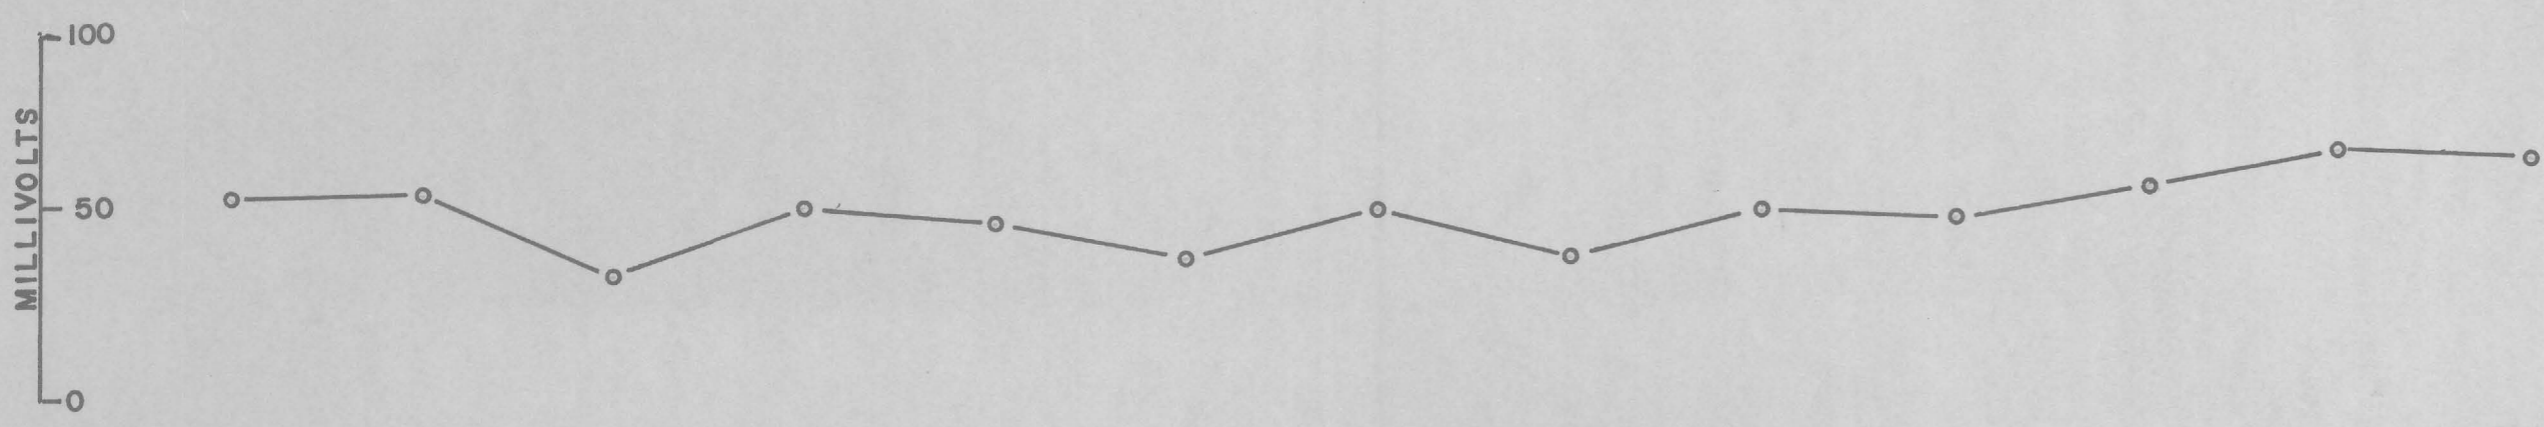
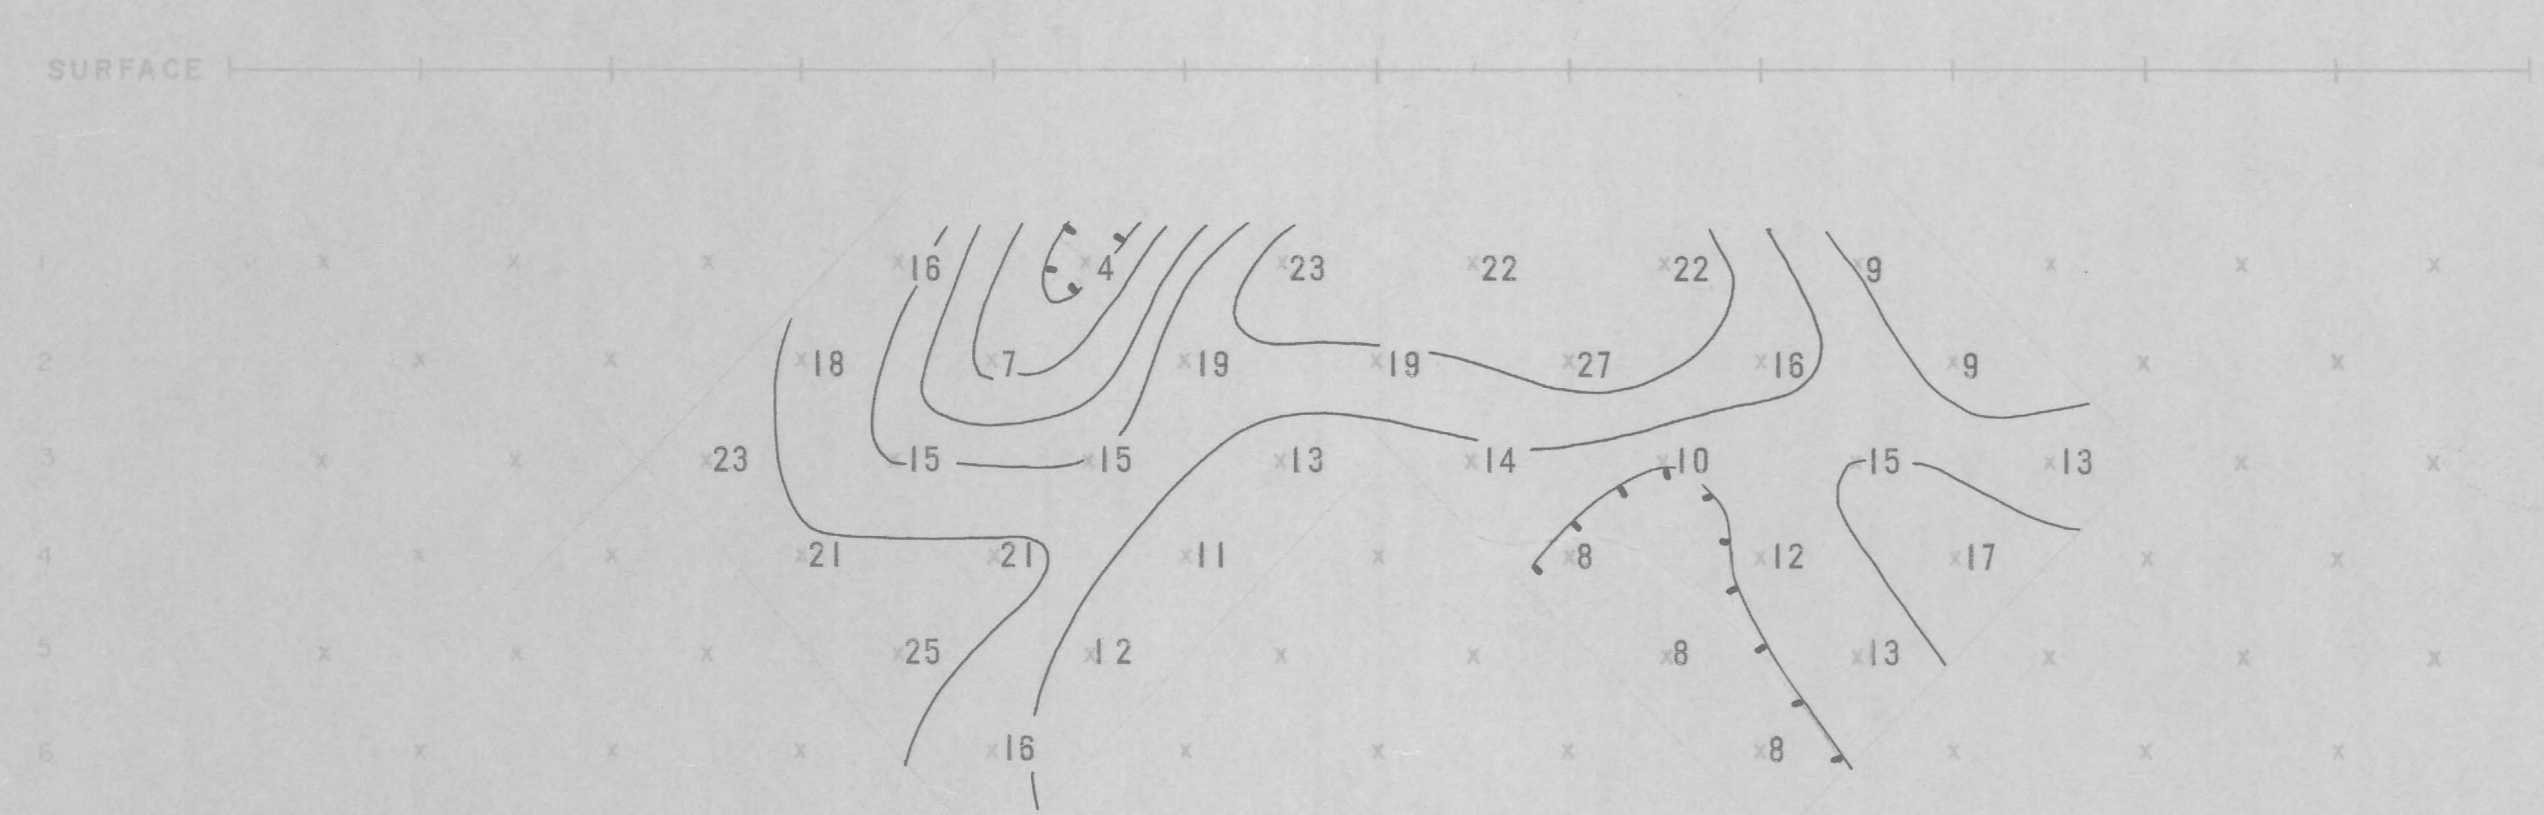
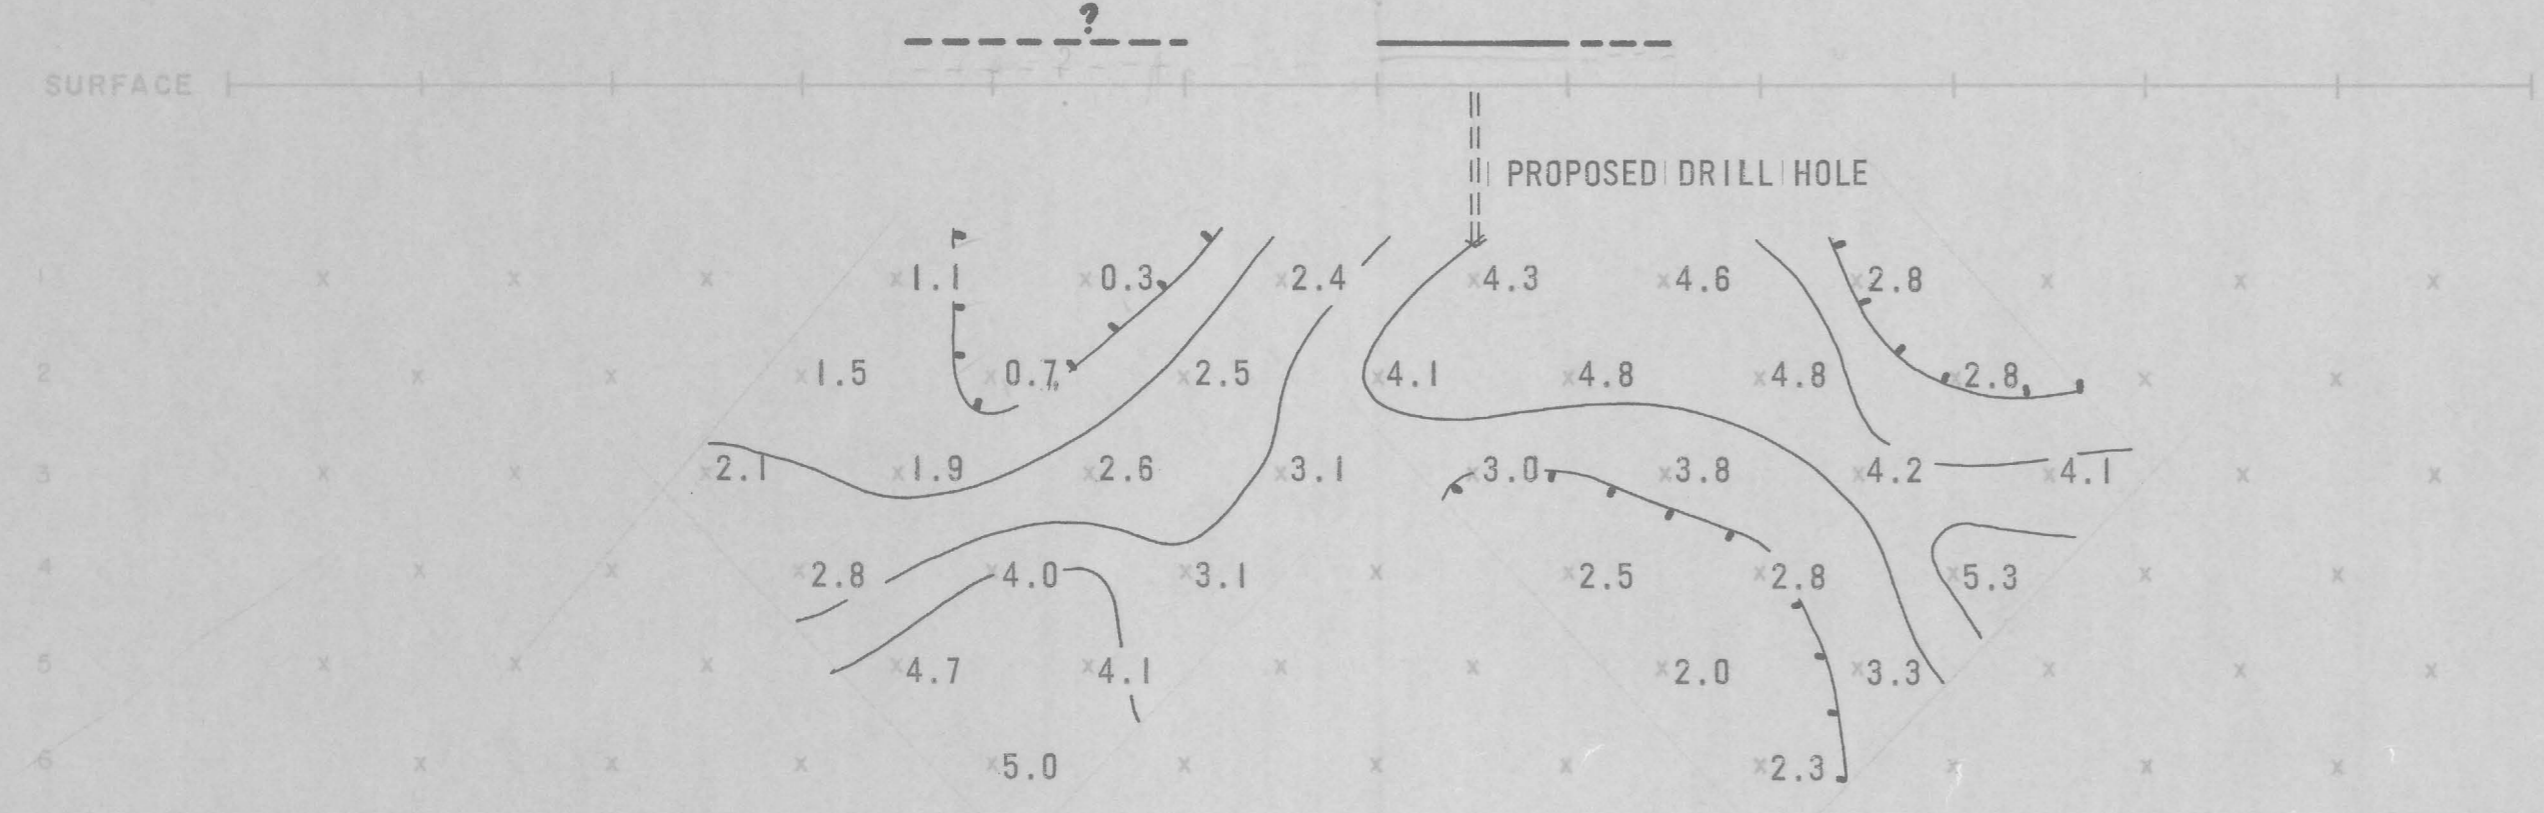



ELECTRODES SURFACE STATIONS 15NW 12.5 10 7.5 5 2.5 0-NW/SE 2.5 5 7.5 10 12.5 15SE SURFACE

SPREAD 1 INTERFACE

INTERVAL BETWEEN SENDER & RECEIVER DIPOLES

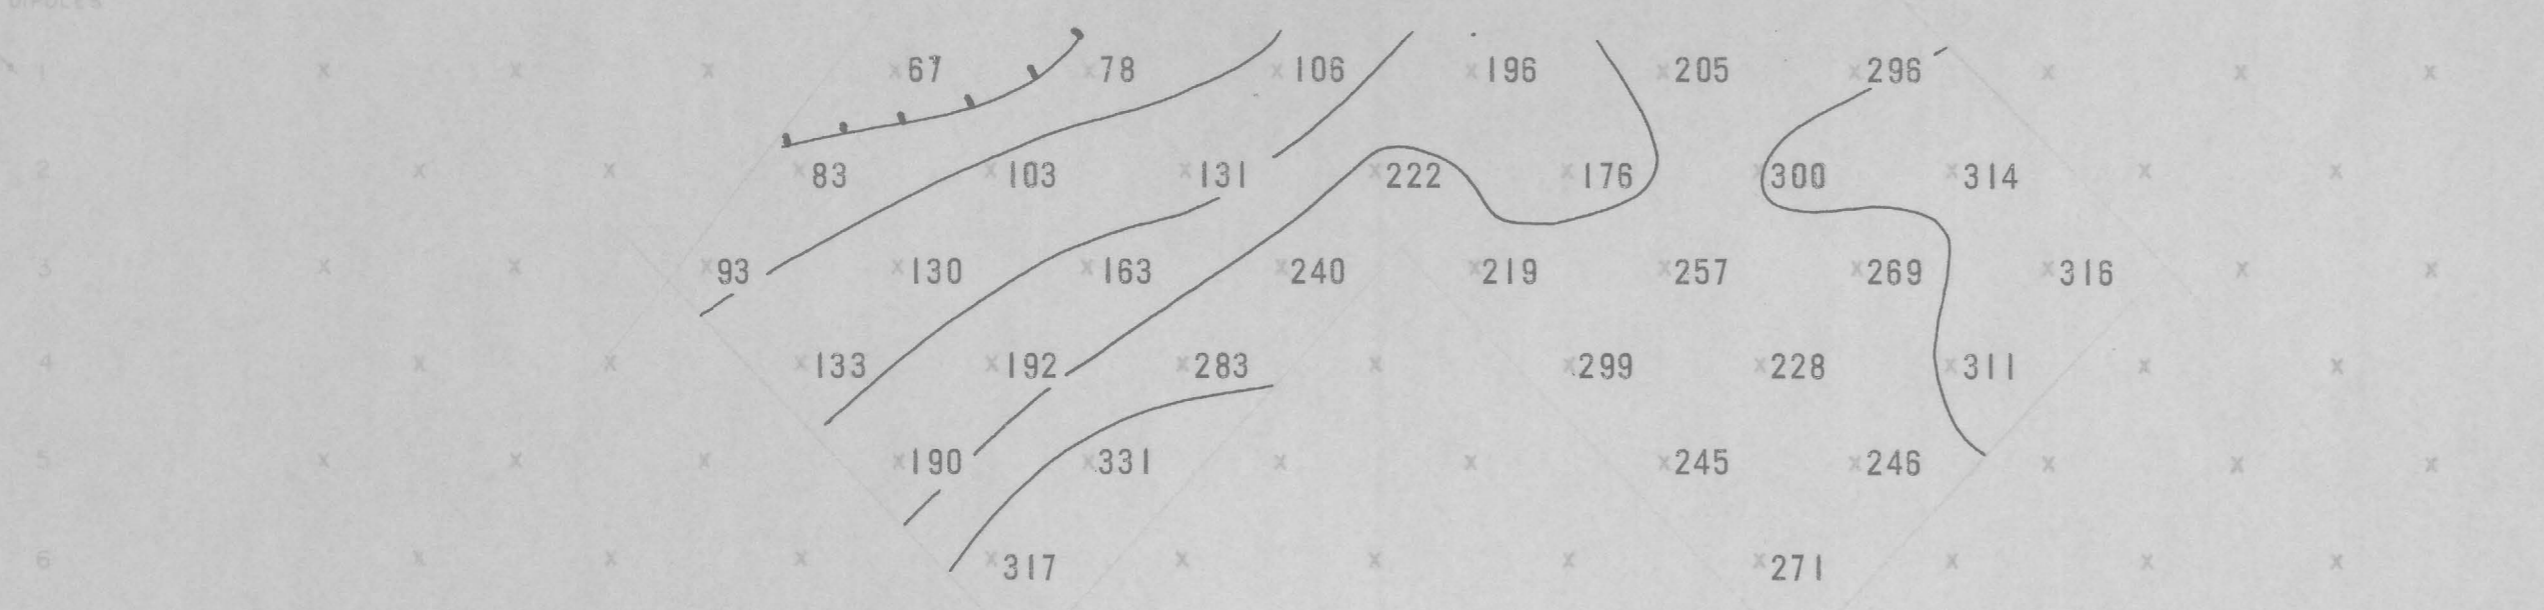

EXPLANATION

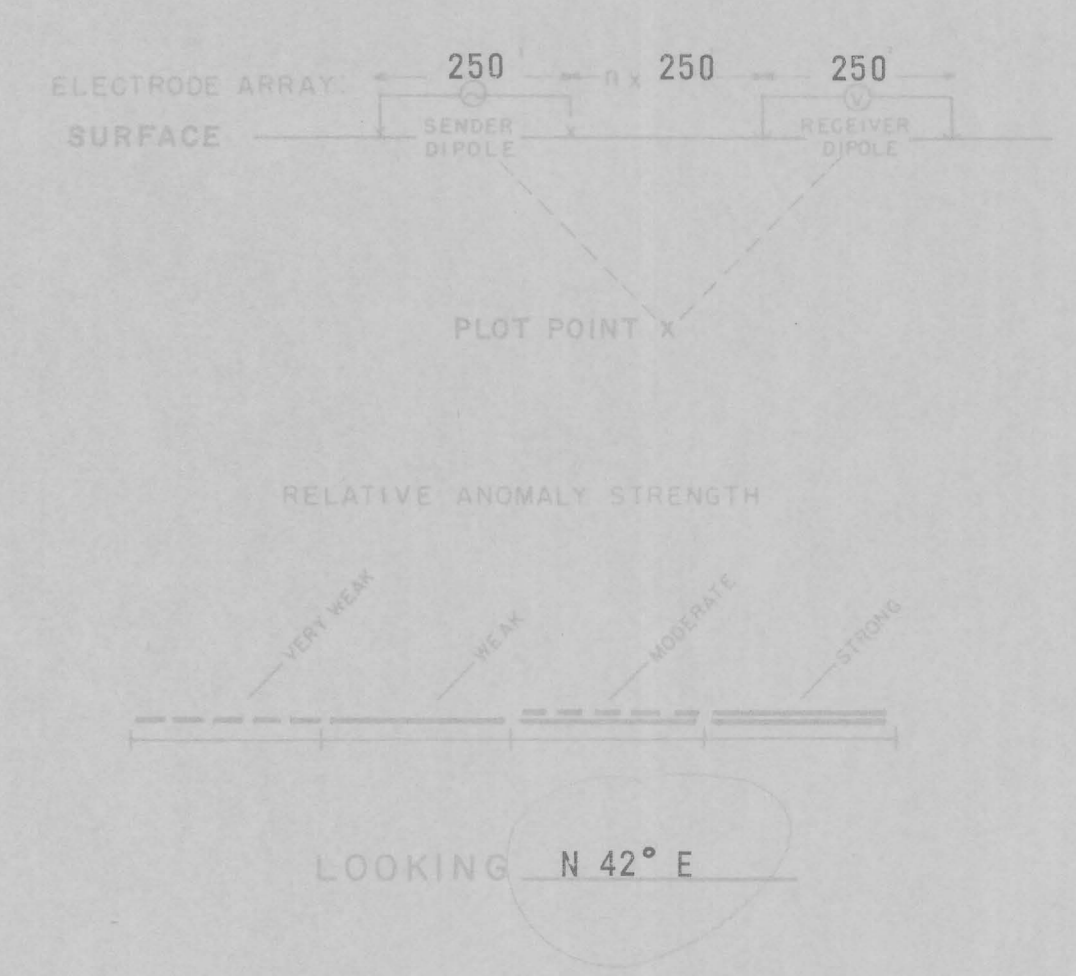

APPARENT RESISTIVITY ( $\rho_{DC}$ ) IN UNITS OF OHM FEET  
 CONTOUR INTERVAL LOGARITHMIC  
 SENDER FREQUENCY: 0.05 C.P.S.

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT  
 SENDER FREQUENCIES: 0.05 & 3.0 C.P.S.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF) (MCF =  $\frac{PFE \times 1000}{\rho_{DC}}$ )  
 CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

JOHNSON CAMP AREA  
 SECTIONAL DATA SHEET  
 LINE NO. 2 (SPREAD 1)  
 INDUCED POLARIZATION TRAVERSE  
 HEINRICHS GEOEXPLORATION COMPANY  
 SCALE: 1" = 500' DATE: OCT 1968  
 FOR  
 CONTINENTAL EXPLORATION CORP.

