


SPREAD 1


ELECTRODES SURFACE STATIONS 15SW 12.5 10 7.5 5 2.5 0-SW/NE 2.5 5 7.5 10 12.5 15NE SURFACE

D INTERVAL BETWEEN SENDER & RECEIVER DIPOLES

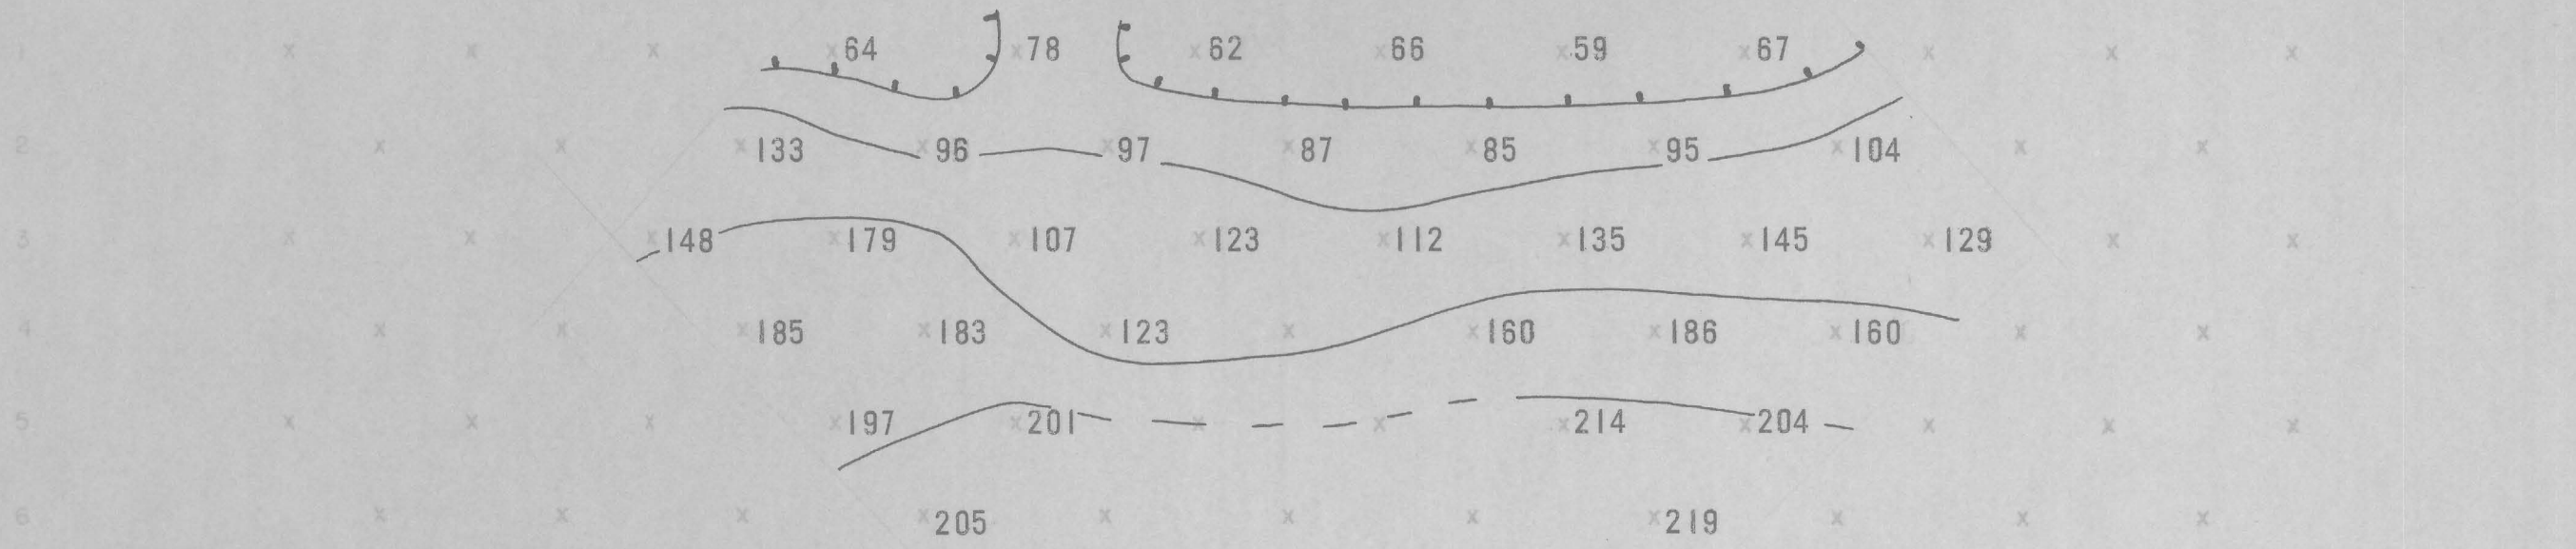


APPARENT RESISTIVITY (P) IN UNITS OF OHM FEET SENDER INTERVAL LOGARITHMIC SENDER FREQUENCY, 0.05 CPS

EXPLANATION

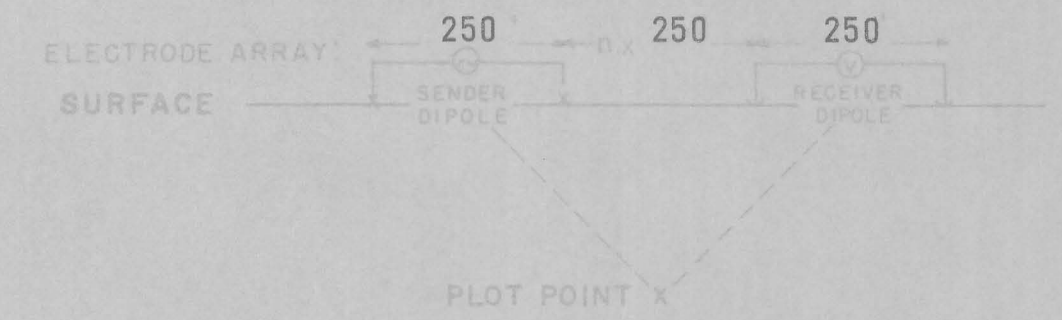


RELATIVE ANOMALY STRENGTH

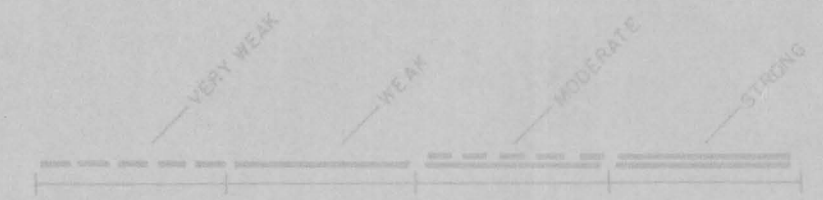

LOOKING N 35° W


SURFACE SURFACE

PROPOSED DRILL HOLE

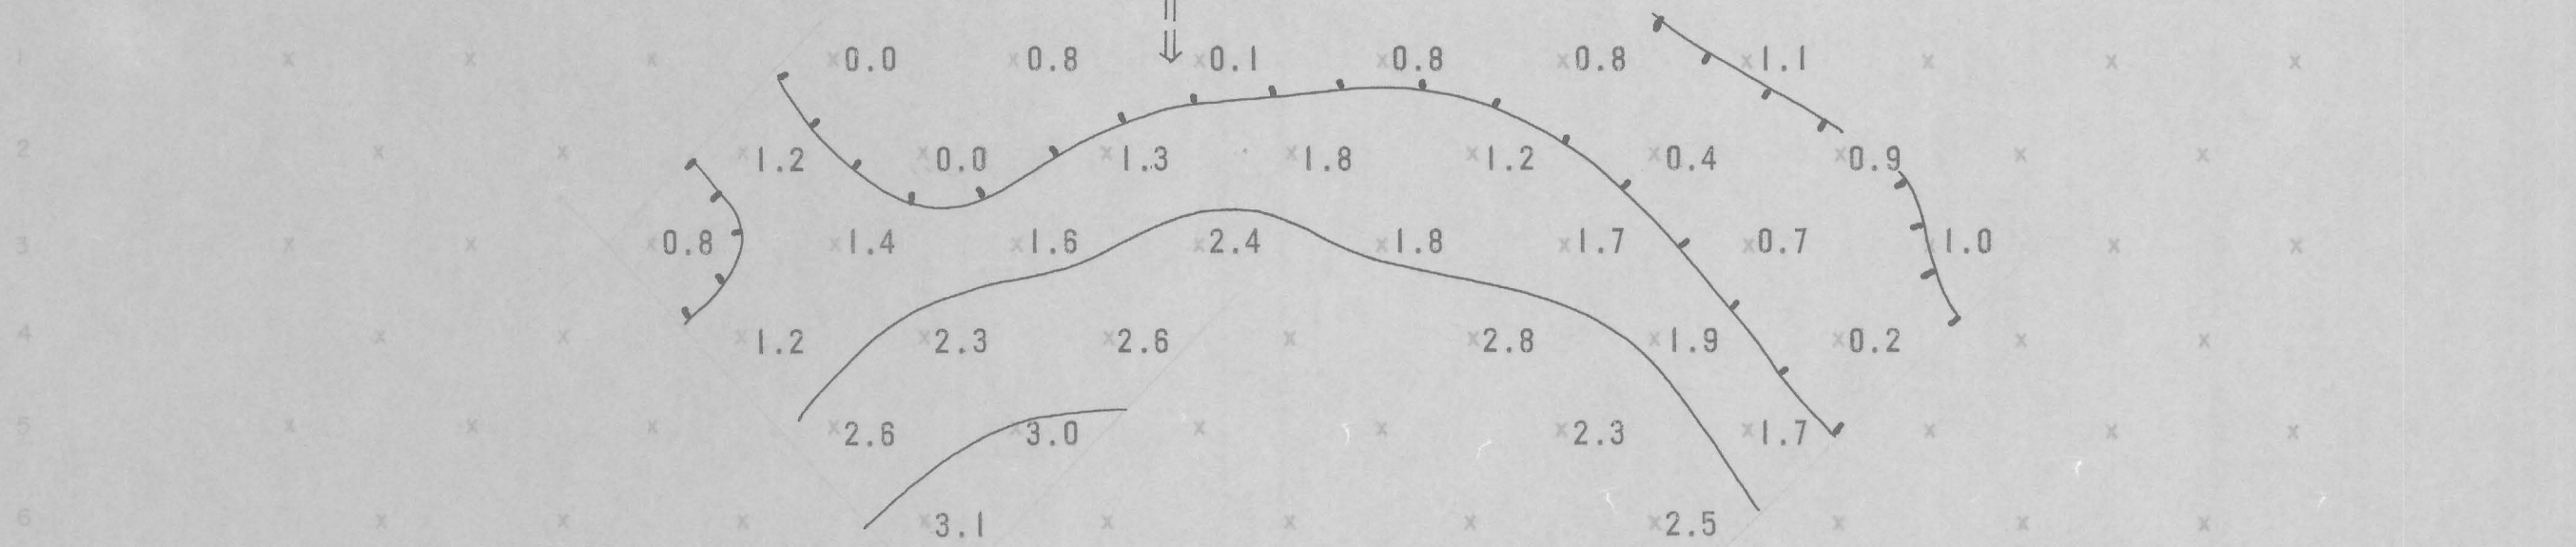

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT SENDER FREQUENCIES: 0.05 & 3.0 CPS

SURFACE SURFACE

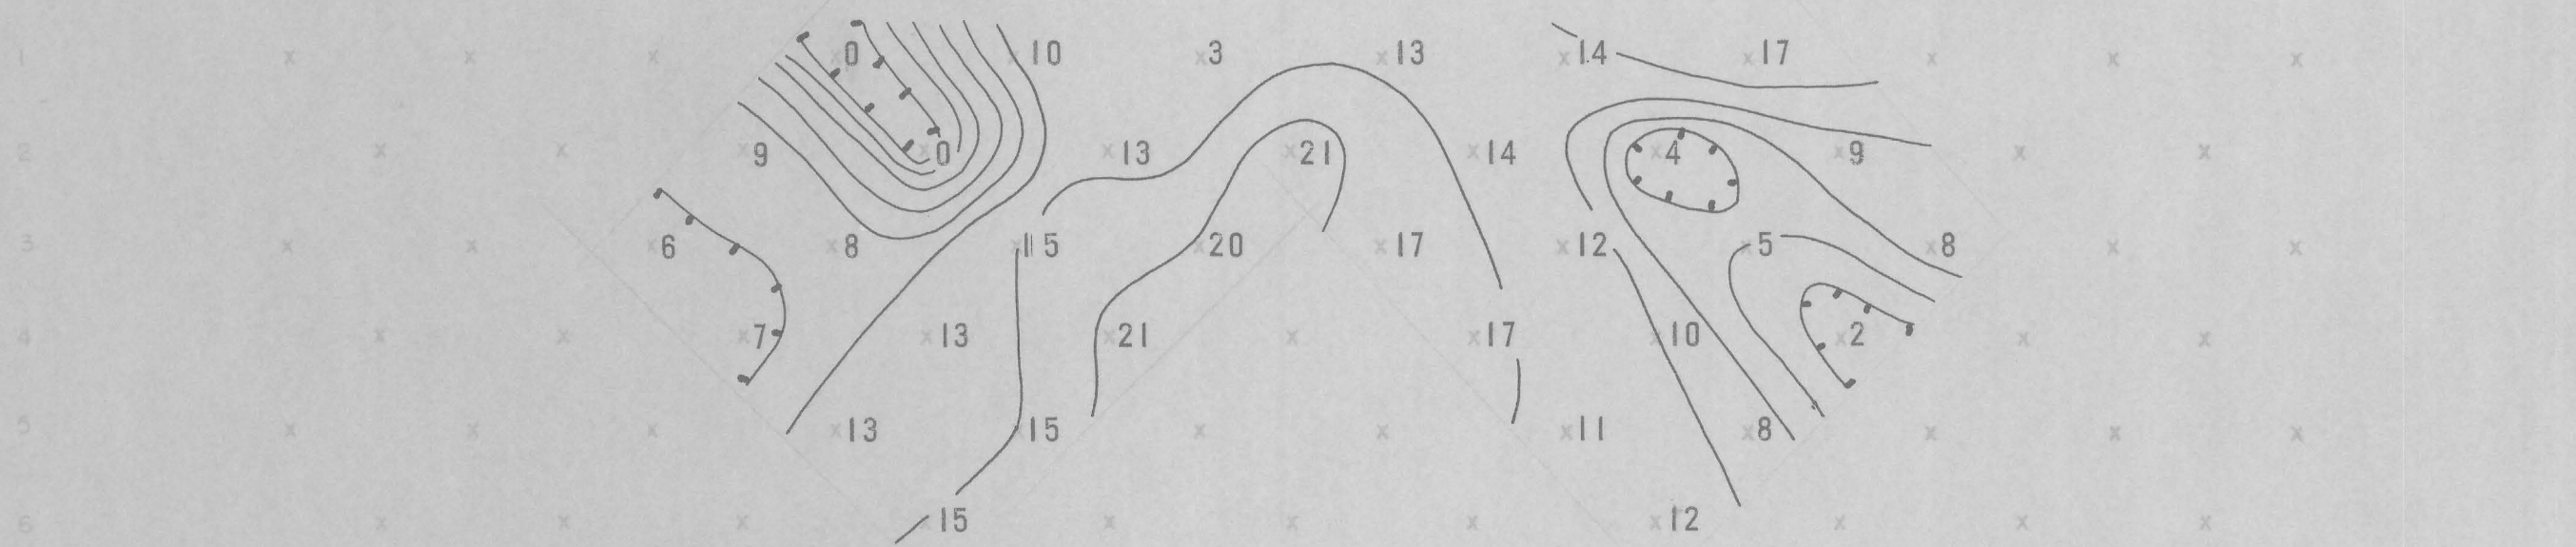

APPARENT "METALLIC CONDUCTION" FACTOR (MCF) (MCF = PFE x 1000) CONTOUR INTERVAL LOGARITHMIC

JOHNSON CAMP AREA

SECTIONAL DATA SHEET

LINE NO. 4 (SPREAD 1)

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 250' DATE: OCT 1968

FOR

CONTINENTAL EXPLORATION CORP.

SELF POTENTIAL

