


REBEL SHAFT

LITTLE KICKER SHAFT

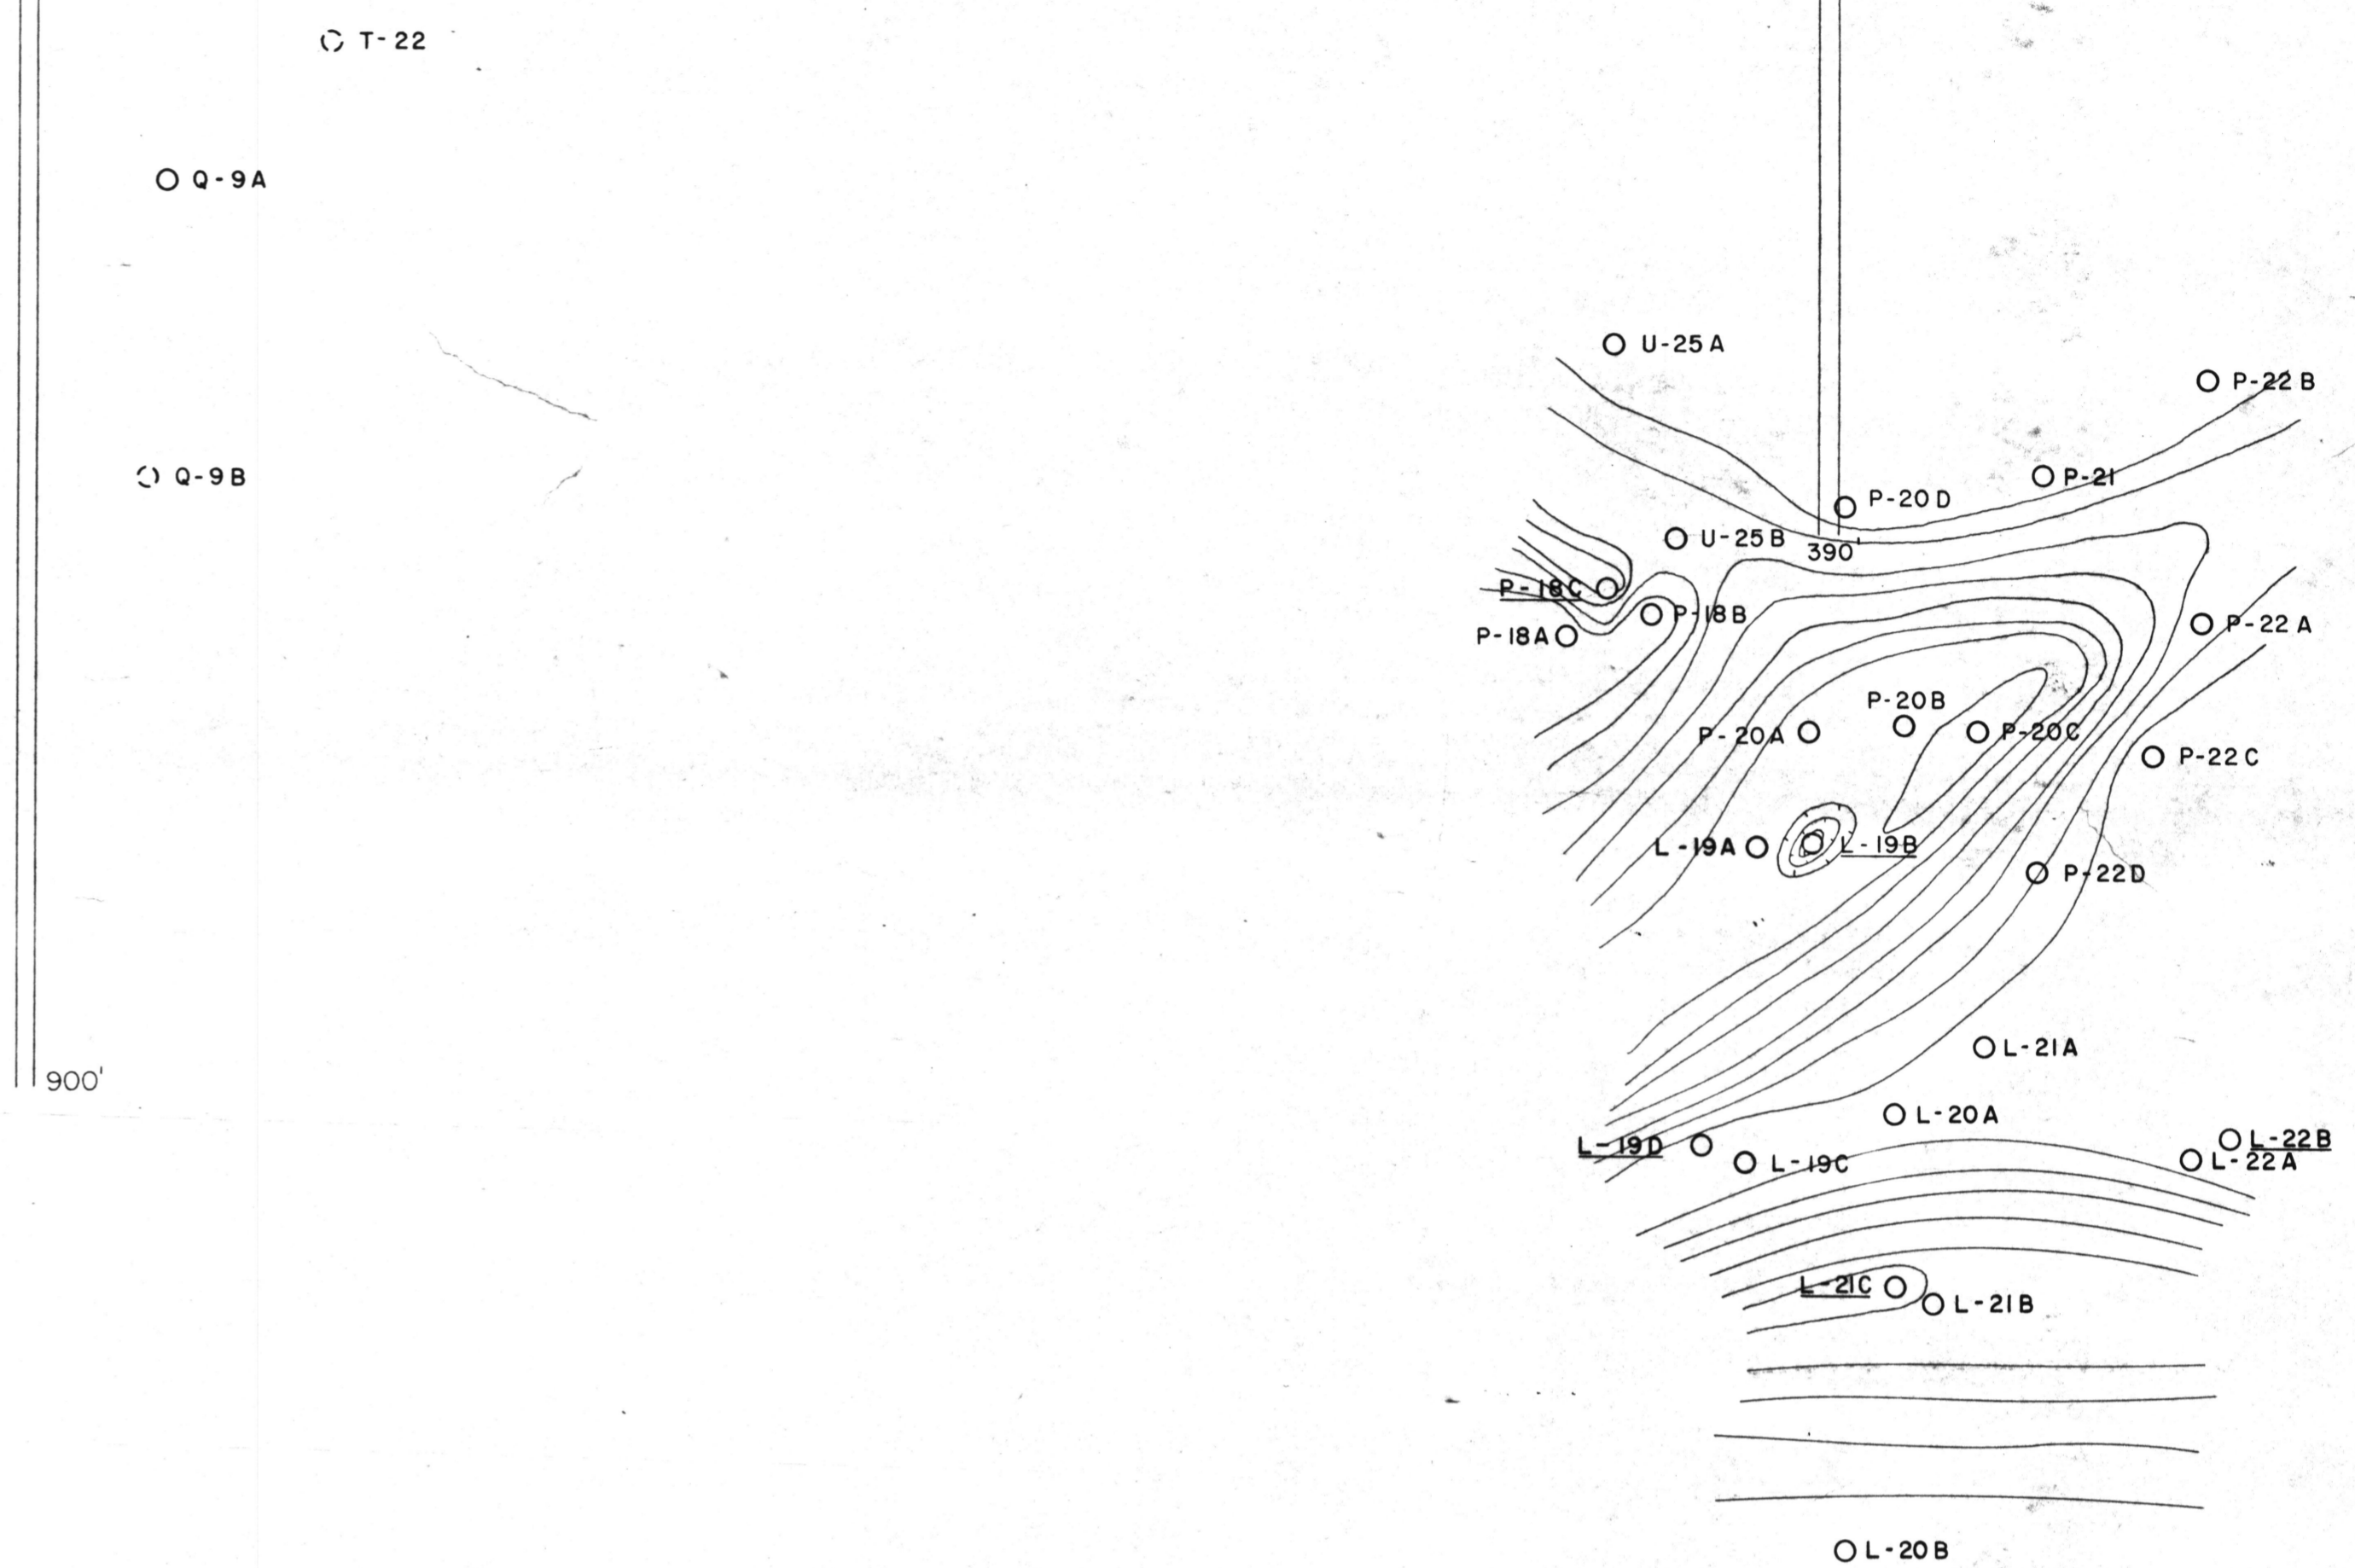

| Drill Hole | Volcanics (true width, ft.) | Mineralization (true width, ft) | Gold (oz/T) | Silver (oz/T) | Copper (%) | Lead (%) | Zinc (%) |
|------------------------------------------------------------------------------------------|--------------------------------|------------------------------------|----------------|------------------|---------------|-------------|-------------|
| U-25A | 34.0 | 5.8 | .014 | .25 | .01 | .15 | .68 |
| U-25B | 21.1 | 6.0 | .031 | .07 | .11 | .21 | .64 |
| P-20A | 13.0 | 4.6 | .304 | 1.39 | 0.23 | 1.02 | 1.11 |
| P-20B | 22.6 | 5.2 | .250 | 3.71 | 0.57 | 1.32 | 1.66 |
| P-20C | 27.4 | 4.0 | 1.215 | 6.61 | 0.69 | 1.63 | 4.84 |
| † P-20D | 8.9 | 4.4 | .020 | .20 | .02 | .34 | .68 |
| P-22A | 10.8 | 2.5 | .076 | .56 | .04 | .21 | 2.78 |
| P-22B | 12.3 | 1.5 | .013 | <.10 | .01 | .03 | .1 |
| P-22C | 16.3 | 4.5 | .012 | .23 | .02 | .12 | .87 |
| P-22D | 14.9 | 0.9 | .182 | <.1 | .11 | 1.5 | 3.05 |
| L-19A | 17.0 | 4.1 | .302 | 2.98 | 0.79 | 0.11 | 0.37 |
| *L-19B | 12.0 | 5.6 | .072 | .42 | .23 | .14 | .20 |
| † L-19C | 7.7 | 4.0 | .007 | .06 | <.01 | .07 | 1.14 |
| L-30 | 13.1 | 1.4 | .013 | <.1 | .01 | .10 | .35 |
| Q-9A | 5.9 | 1.9 | .062 | .15 | .04 | .42 | 2.15 |
| Q-9B | 13.9 | 0.9 | <.01 | <.10 | <.01 | .05 | .02 |
| L-20 | 10.6 | 2.7 | .009 | 2.07 | .45 | .48 | .42 |
| †L-19D | † 8.3 | 0.7 | .006 | <.10 | .02 | .12 | .33 |
| L-20B | 19.5 | 0.6 | .237 | 1.7 | .22 | 1.40 | .48 |
| † L-21A | 13.6 | 4.1 | .003 | 0.3 | .06 | 1.8 | .33 |
| L-21B | 4.6 | 4.6 | .111 | 1.06 | .19 | .32 | .42 |
| *L-21C | † 4.5 | 3.8 | .335 | 2.9 | | | |
| L-22A | 20.4 | 1.5 | .007 | .1 | <.01 | .13 | .36 |
| †L-22B | 9.2 | 2.4 | .012 | .18 | | | |
| P-18A | 3.8 | 0.9 | .016 | 1.1 | .11 | 1.12 | 1.37 |
| † P-18B | 8.3 | 3.2 | <.01 | <.01 | <.01 | .03 | .27 |
| ††P-18C | 7.3 | 3.1 | .126 | .6 | .06 | .62 | 1.20 |
| P-21 | 12.5 | 2.6 | .018 | .1 | <.01 | .03 | 1.13 |
| L-22C | 12.9 | 3.3 | .010 | .47 | .14 | .63 | 1.29 |
| L-23 | 11.8 | 2.6 | .025 | .79 | .08 | 1.86 | 2.72 |
| L-19F # | 6.5 | 2.9 | .249 | 2.42 | 1.00 | 1.62 | 1.62 |
| L-25 | 18.9 | 4.2 | .66 | 2.30 | .44 | .33 | 1.51 |
| L-17 | 3.0 | 1.1 | .08 | .10 | <.01 | .07 | .10 |
| L-16 | Fault Zone | 2.0 | .010 | .20 | .03 | .16 | .08 |
| * Denotes wedge, † Denotes core loss, ‡ Mineralized, sheared, granodiorite and volcanics | | | | | | | |
| L-25B | 13.9 | 3.7 | .006 | 0.1 | .04 | <.01 | .01 |
| J-25B | 16.1 | 0.4 | .120 | 0.2 | N/A | N/A | N/A |
| J-25 | 31.5 | 1.5 | .036 | 1.4 | .06 | .17 | .73 |
| L-27 | 10.5 | 0.7 | .080 | .20 | <.01 | <.01 | .02 |
| L-20 | 19.3 | 1.4 | .013 | <.10 | <.01 | .10 | .35 |

GRADE ISOPACH
Grade times true width of mineralization
1" = 100'

EXPLANATION

- > 2
- 1 - 2
- .75 - 1.0
- .50 - .75
- .25 - .50
- .2 - .25
- .15 - .20
- .10 - .15
- <.10
- P-18B Drill Hole intercept
- P-18B Wedge intercept

ADMMR0003113