

ASSAY MAP OF SAN MARCOS MINE

WENDEN YUMA COUNTY ARIZONA



SKETCH SHOWING HORIZONTAL PROJECTION
AND SECTIONS

DATE: MAY 25 1932, RECHECKED MARCH 1933.

ASSAYED AND SAMPLED BY A.W. WORCHESTER

ASSAYS

No.	Loc.	Depth	Remarks
1	610	35	7.00 No. F.W.
2	615	29	5.00 No. walls
3	110	29	7.00 Bottom shallow mine No. Walls
4	410	28	5.00 No. walls
5	018	39	7.00 Top of Tunnel
6	315	32	6.40 No. walls
7	610	24	4.80 -
8	615	33	6.40 -
9	310	29	5.00 (H.W.) No. walls
10	310	35	11.00 F.W.
11	410	49	9.80 -
12	115	83	16.00 -
13	410	81	8.00 -
14	310	29	5.00 -
15	210	25	5.00 -
16	410	35	7.00 -
17	210	25	6.00 (H.W.) No. F.W.
18	410	33	6.60 No. F.W.
19	310	23	No. walls
20	910	28	5.80 No. F.W.
21	410	15	11.00 (H.W.) No. walls
22	410	29	7.00 No. Walls
23	510	37	7.40 -
24	310	19	7.00 Gauge in F.W. - No F.W. yet
25	310	17	5.60 (H.W.) No. walls
26	315	45	7.00 No. walls
27	115	27	5.60 (H.W.) No. walls in F.W. not exposed
28	415	37	6.40 No. walls
29	610	36	6.00 -
30	510	27	5.40 -
31	610	37	7.40 -
32	310	23	6.00 Under track - No. F.W.
33	610	22	4.40 Taken above H.W. in shaft
34	510	18	10.00 Under track No. F.W.
35	410	24	4.80 -
36	610	35	7.00 No. walls
37	310	23	6.00 F.W.
38	610	24	4.80 -
39	24	4.80 Under track No. F.W.	
40	910	23	6.00 (H.W.) No. walls
41	410	23	4.80 (H.W.) No. walls
42	410	23	4.80 Under track No. F.W.
43	610	17	4.40 (H.W.)
44	410	23	4.80 F.W.
45	410	23	4.80 Under track No. F.W.
46	610	26	7.00 No. walls
47	310	23	6.00 -
48	610	28	7.00 Under track No. F.W.
49	415	39	7.00 -
50	610	37	7.40 -
51	610	11	4.00 F.W. No. walls
52	610	35	7.00 F.W.
53	415	31	6.00 No. walls
54	315	31	6.00 -
55	410	23	4.80 -
56	410	23	4.80 -
57	910	23	5.00 -
58	415	27	5.40 -
59	610	31	6.00 No. walls
60	610	21	5.00 -
61	610	27	5.40 -
62	610	37	7.40 -
63	610	36	7.00 -
63A	610	34	6.00 - H.W.
63B	510	37	7.40 -
64	510	31	6.00 No. walls
65	510	28	5.40 - H.W.
66	610	32	6.40 -
67	315	28	6.00 No. walls
68	410	36	7.20 -
69	410	32	6.40 -
70	410	23	4.80 No. H.W.
71	310	23	5.00 -
72	210	23	4.40 -
73	215	23	4.40 -
74	610	39	7.80 -
75	1010	28	5.60 -
76	1010	28	5.60 -
77	1010	29	11.00 -
78	710	29	18.00 -
79	810	23	6.40 No. walls
80	210	27	4.00 Under track
81	415	25	5.00 -
82	210	20	4.00 -
83	410	22	4.40 (H.W.)
84	210	23	5.00 F.W.
85	110	23	5.00 No. H.W.
85A	415	24	4.80 No. H.W.
85B	415	24	4.80 F.W.
86	810	21	4.00 -
87	415	20	4.00 -
88	810	30	6.00 -
89	610	23	6.00 -
90	510	24	4.80 -
91	415	24	4.80 -
92	615	28	5.40 -
93	410	23	4.40 -
94	810	37	7.40 -
95	515	24	4.80 Face H.W. w. Vertical Winch
96	210	22	4.40 -
96A	710	21	4.00 -
97	215	15	3.00 No. F.W.
98	210	26	4.00 -
99	710	103	20.00 - H.W.
100	415	36	7.00 No. walls
101	315	28	6.00 -
102	315	25	5.60 -
103	310	27	5.40 -

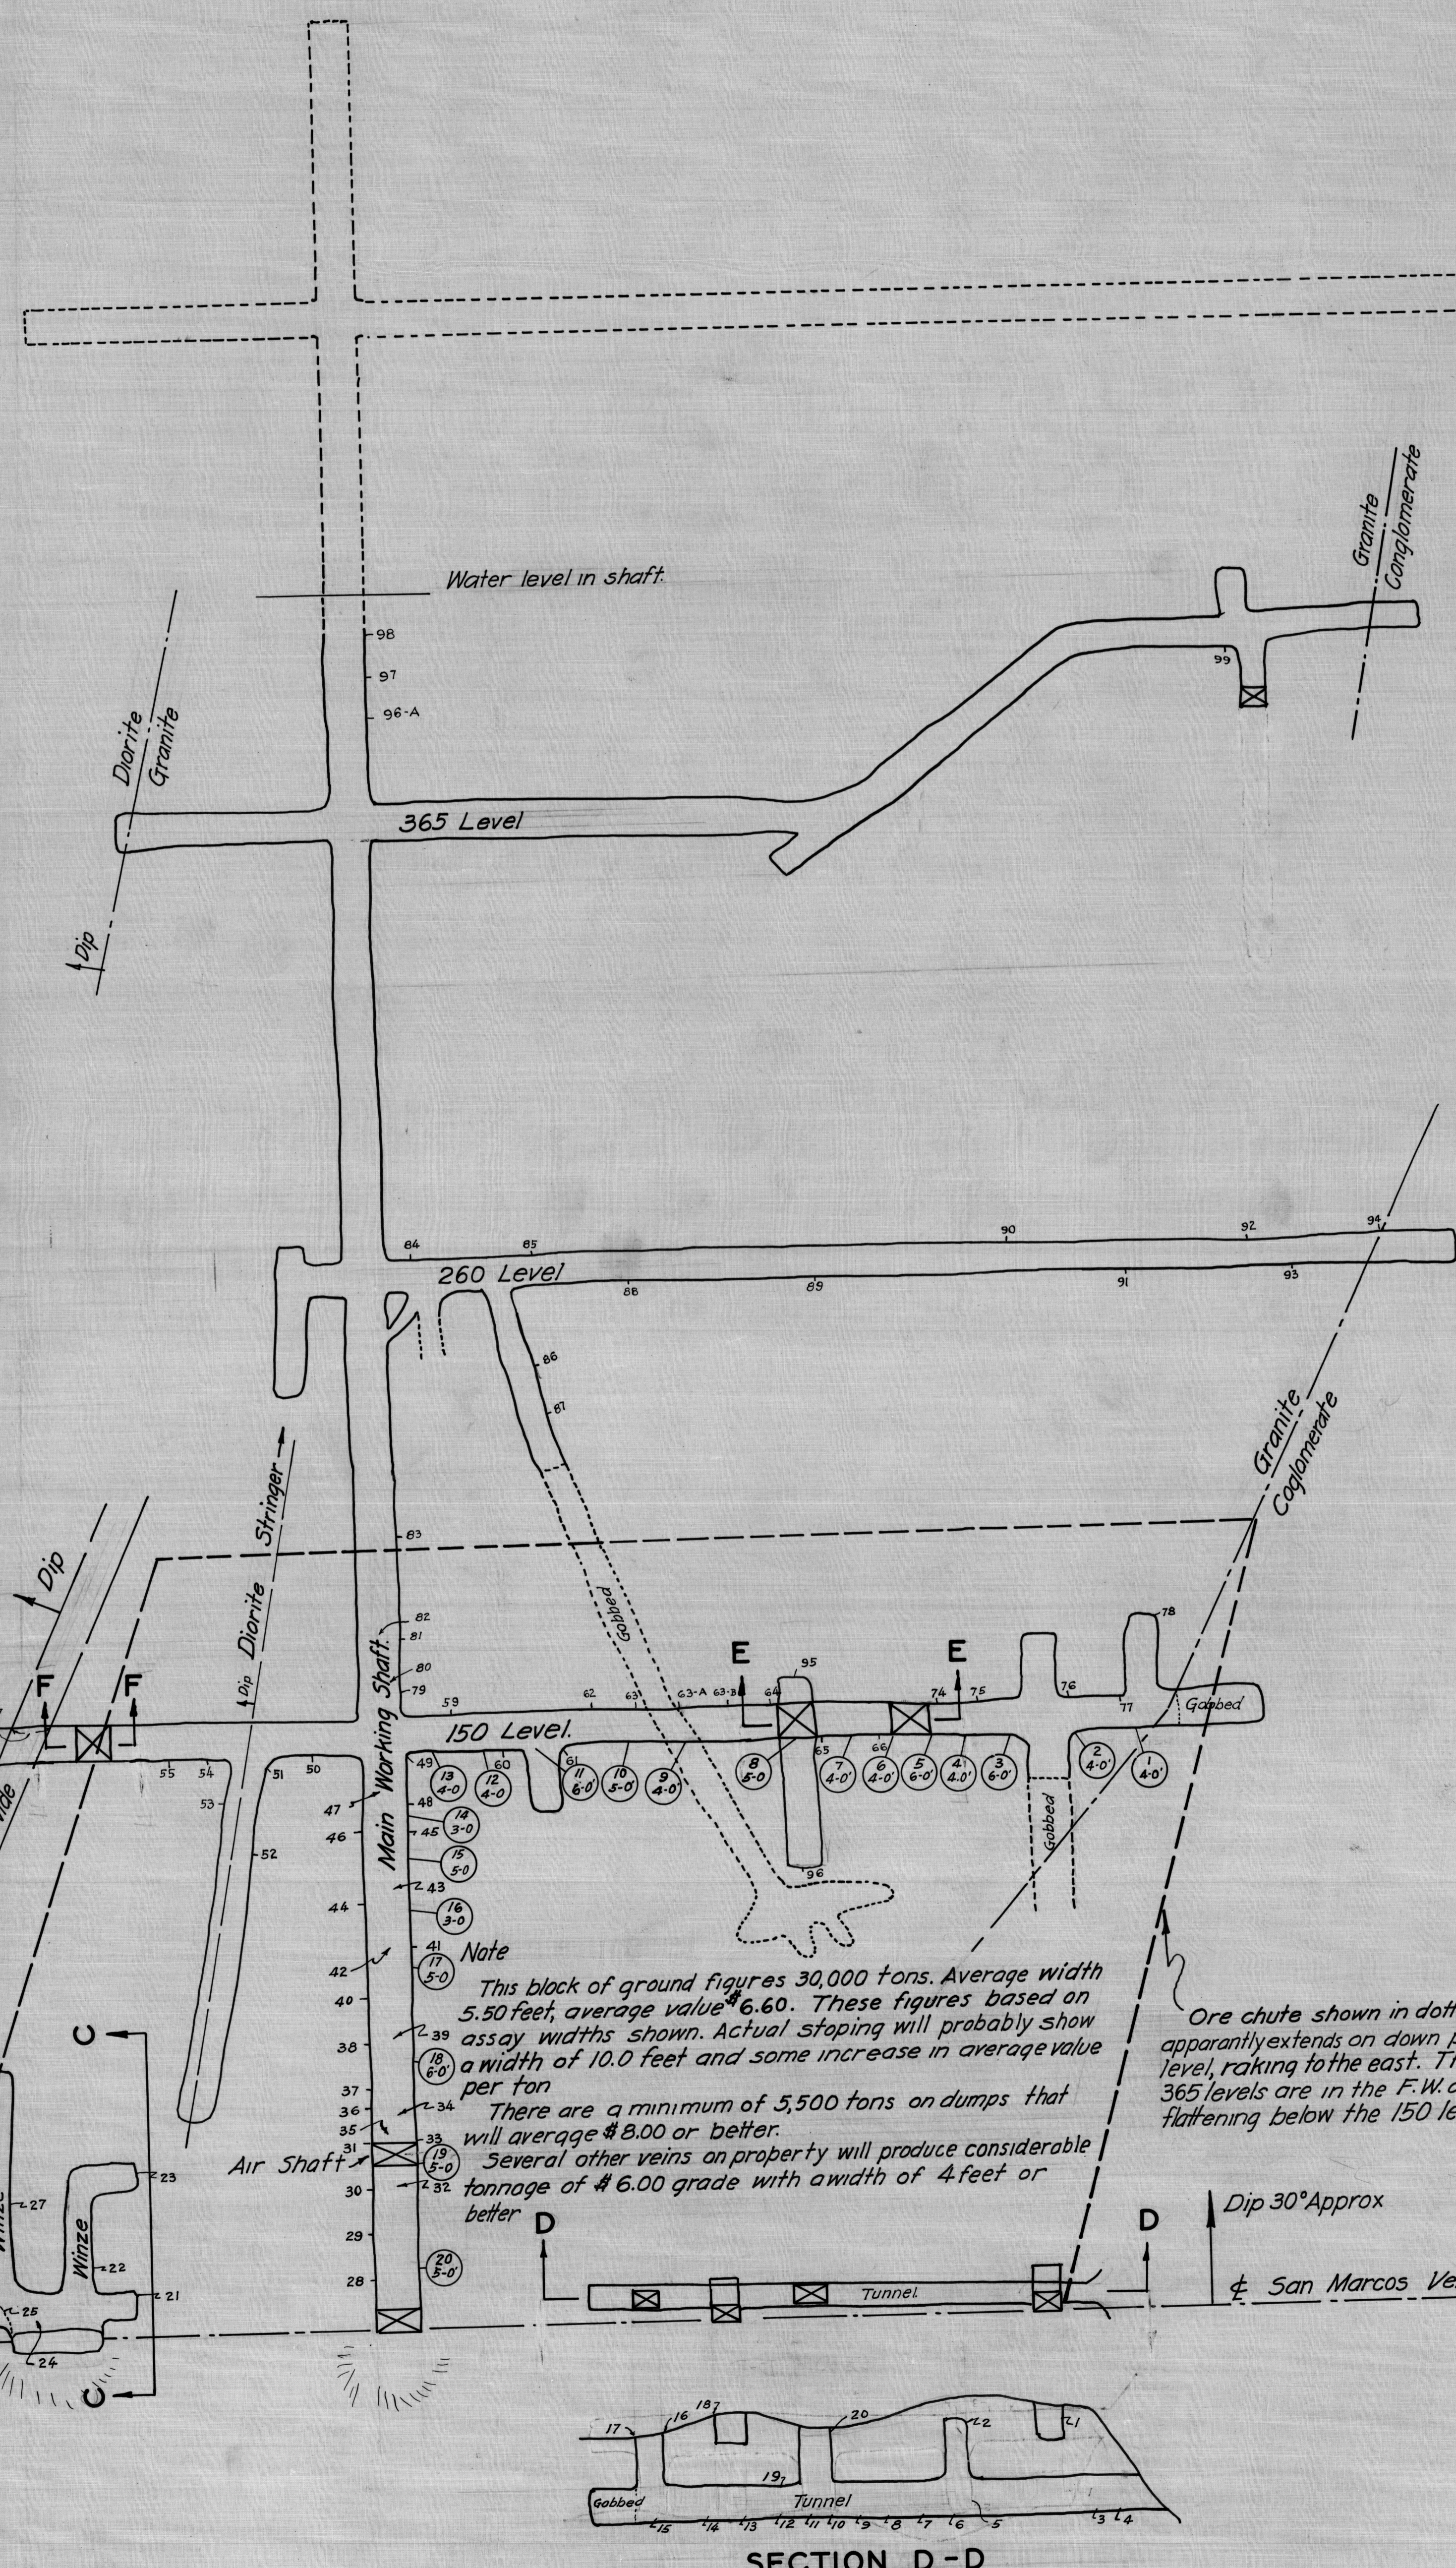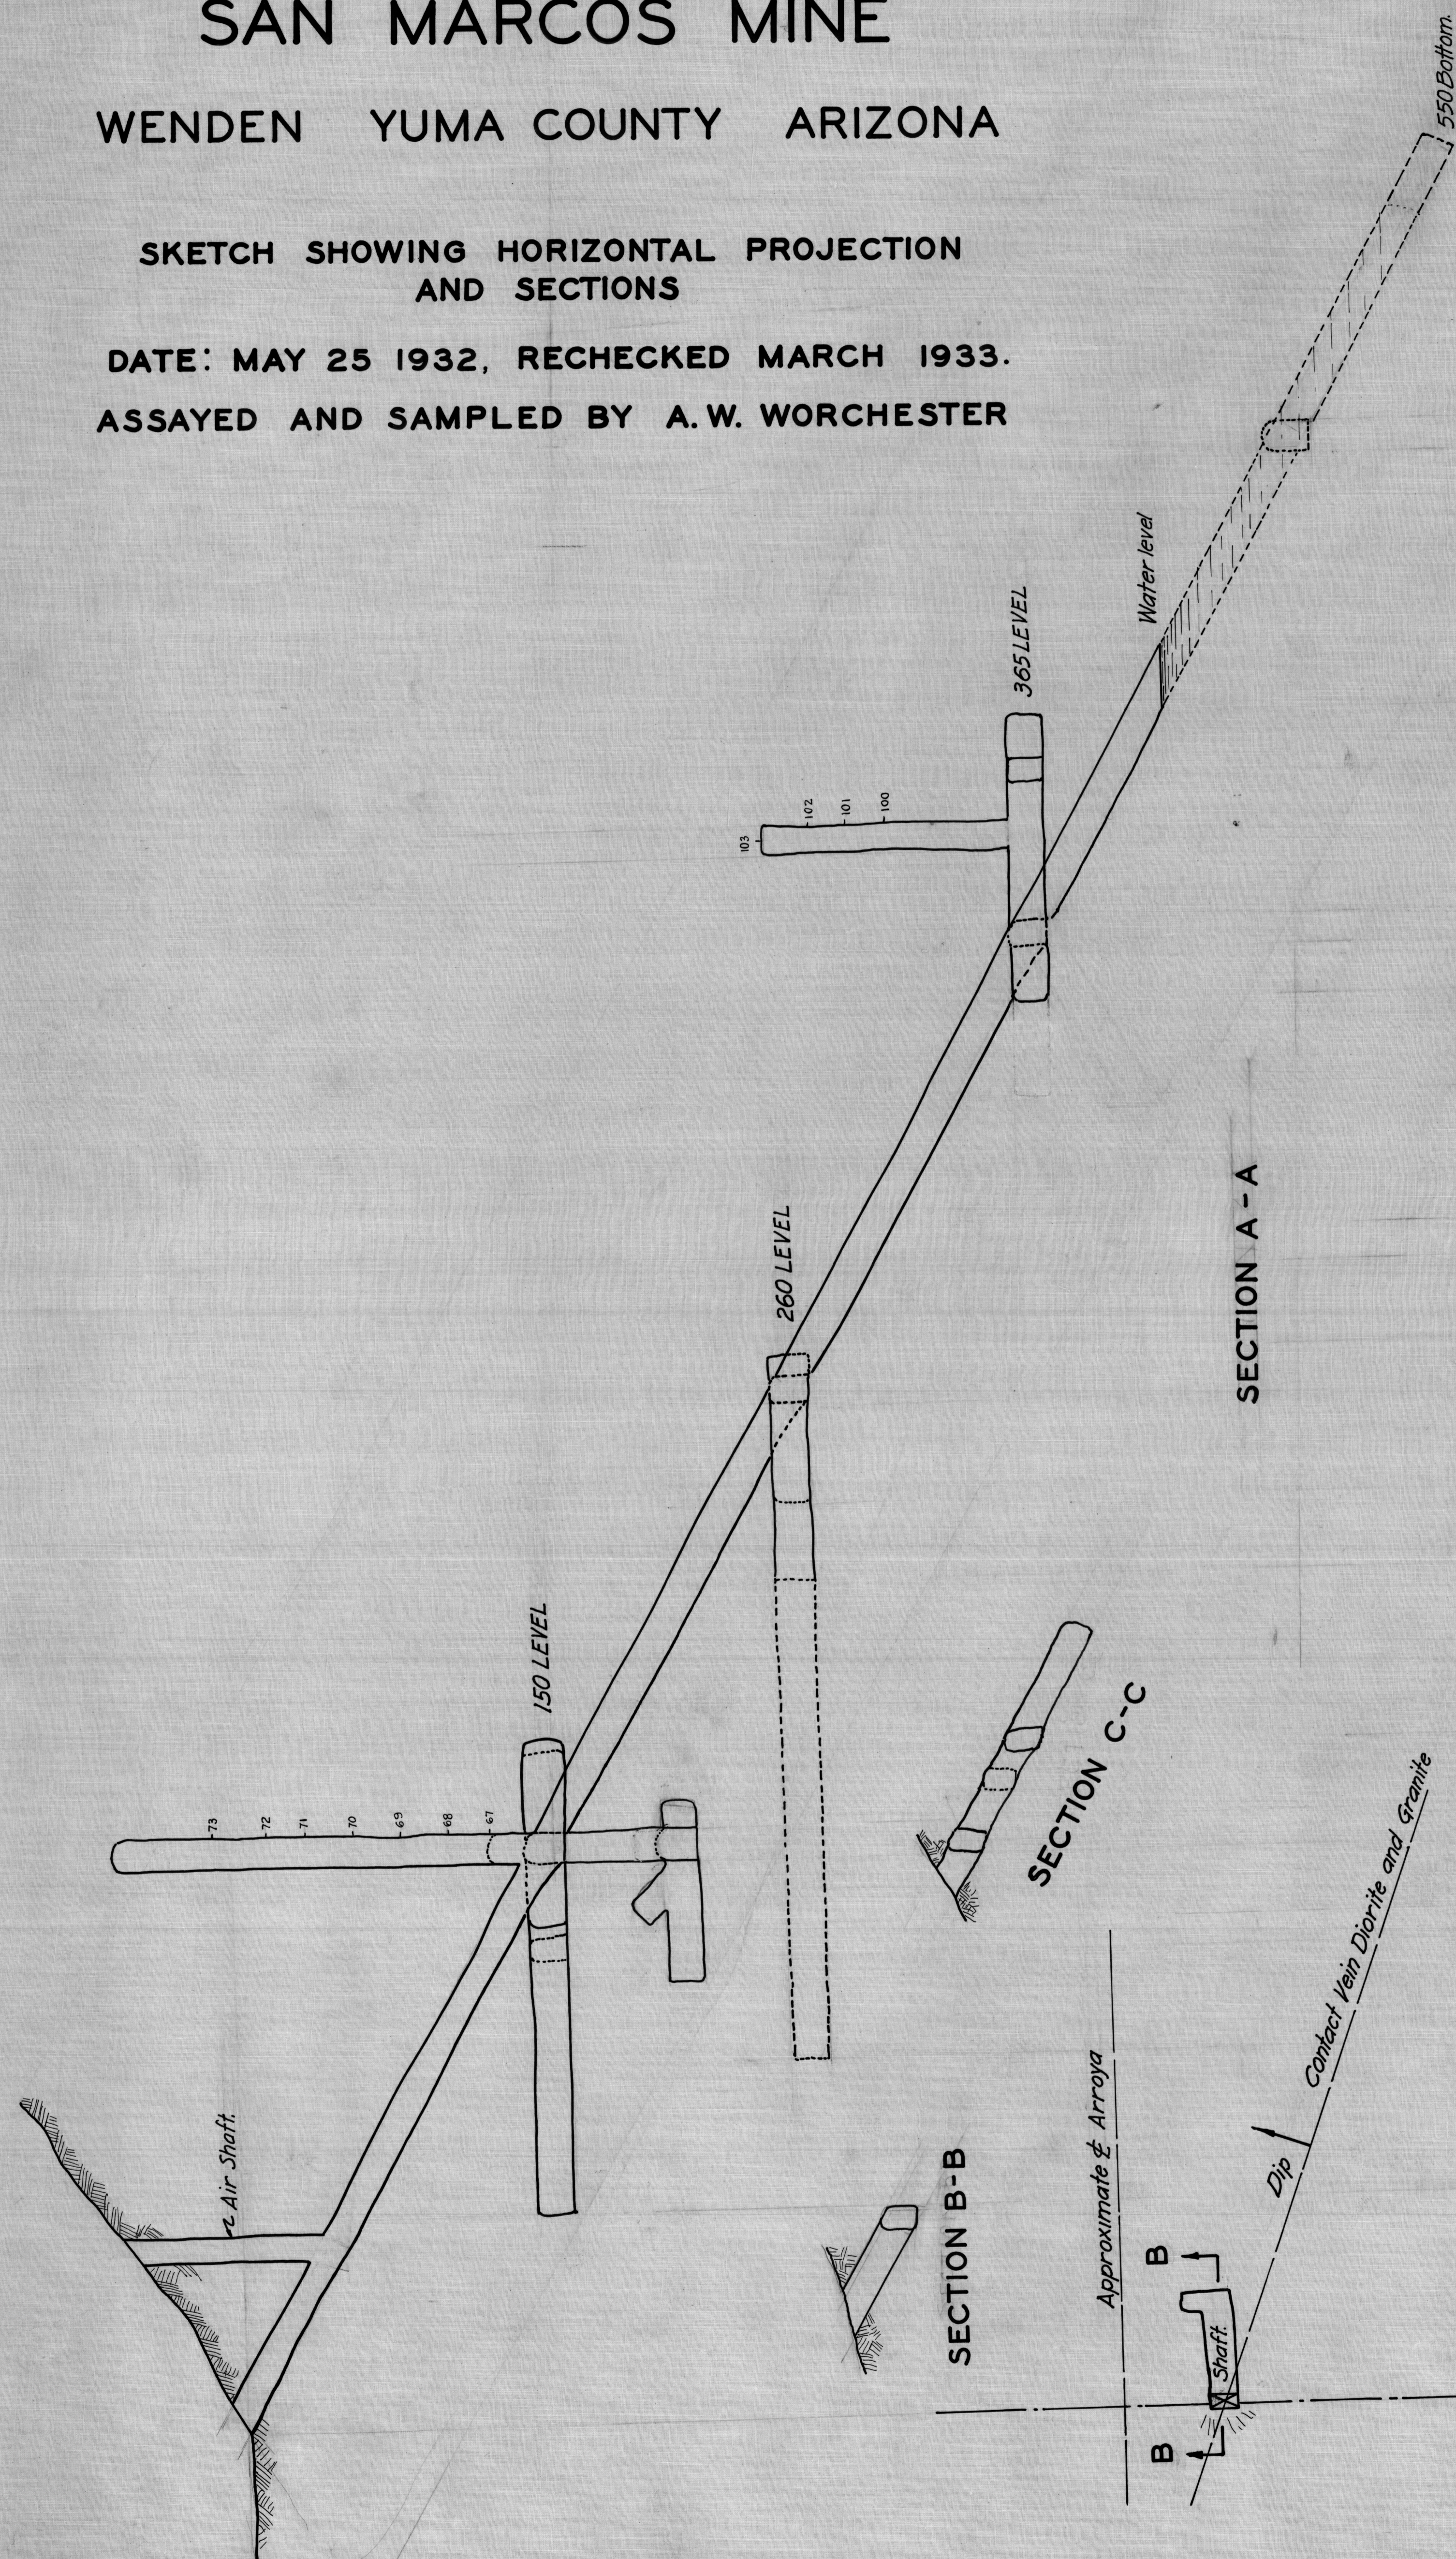

Note
This block of ground figures 30,000 tons. Average width 5.50 feet, average value \$6.60. These figures based on assay widths shown. Actual stoping will probably show a width of 10.0 feet and some increase in average value per ton.
There are a minimum of 5,500 tons on dumps that will average \$8.00 or better.
Several other veins on property will produce considerable tonnage of \$6.00 grade with a width of 4 feet or better.

Ore chute shown in dotted lines apparently extends on down past the 365 level, raking to the east. The 260 and 365 levels are in the F.W. due to vein flattening below the 150 level.

Approximate E. of Arroyo

SECTION D-D