


BUREAU OF MINES SAMPLES						
NO.	WID.	% PB	% ZN	% CU	OZ. AU	OZ. AG
2821	6.0'	2.3	3.6	.03	.185	1.20
2822	4.5'	2.6	3.8	.03	.125	2.95
2823	5.5'	0.4	0.1	.02	.045	0.05
2824	5.2'	4.3	5.4	.09	.260	2.15
2825	5.3'	6.9	6.5	.02	.255	2.85
2826	6.0'	1.4	3.7	.03	.730	1.10
2827	5.2'	2.6	6.7	.20	.935	2.35
2828	4.0'	0.3	0.1	.03	.005	0.40
2829	2.3'	0.2	0.1	.02	.005	0.50
2830	5.2'	7.1	3.2	.47	.360	3.95
2831	2.8'	0.2	2.6	.02	.090	0.60
2832	4.2'	0.1	1.9	.04	.010	0.40
2833	6.0'	0.2	0.8	.02	.010	0.25
2834	4.2'	0.5	1.1	.04	.070	0.30
2835	4.0'	3.1	0.8	.04	.125	0.45

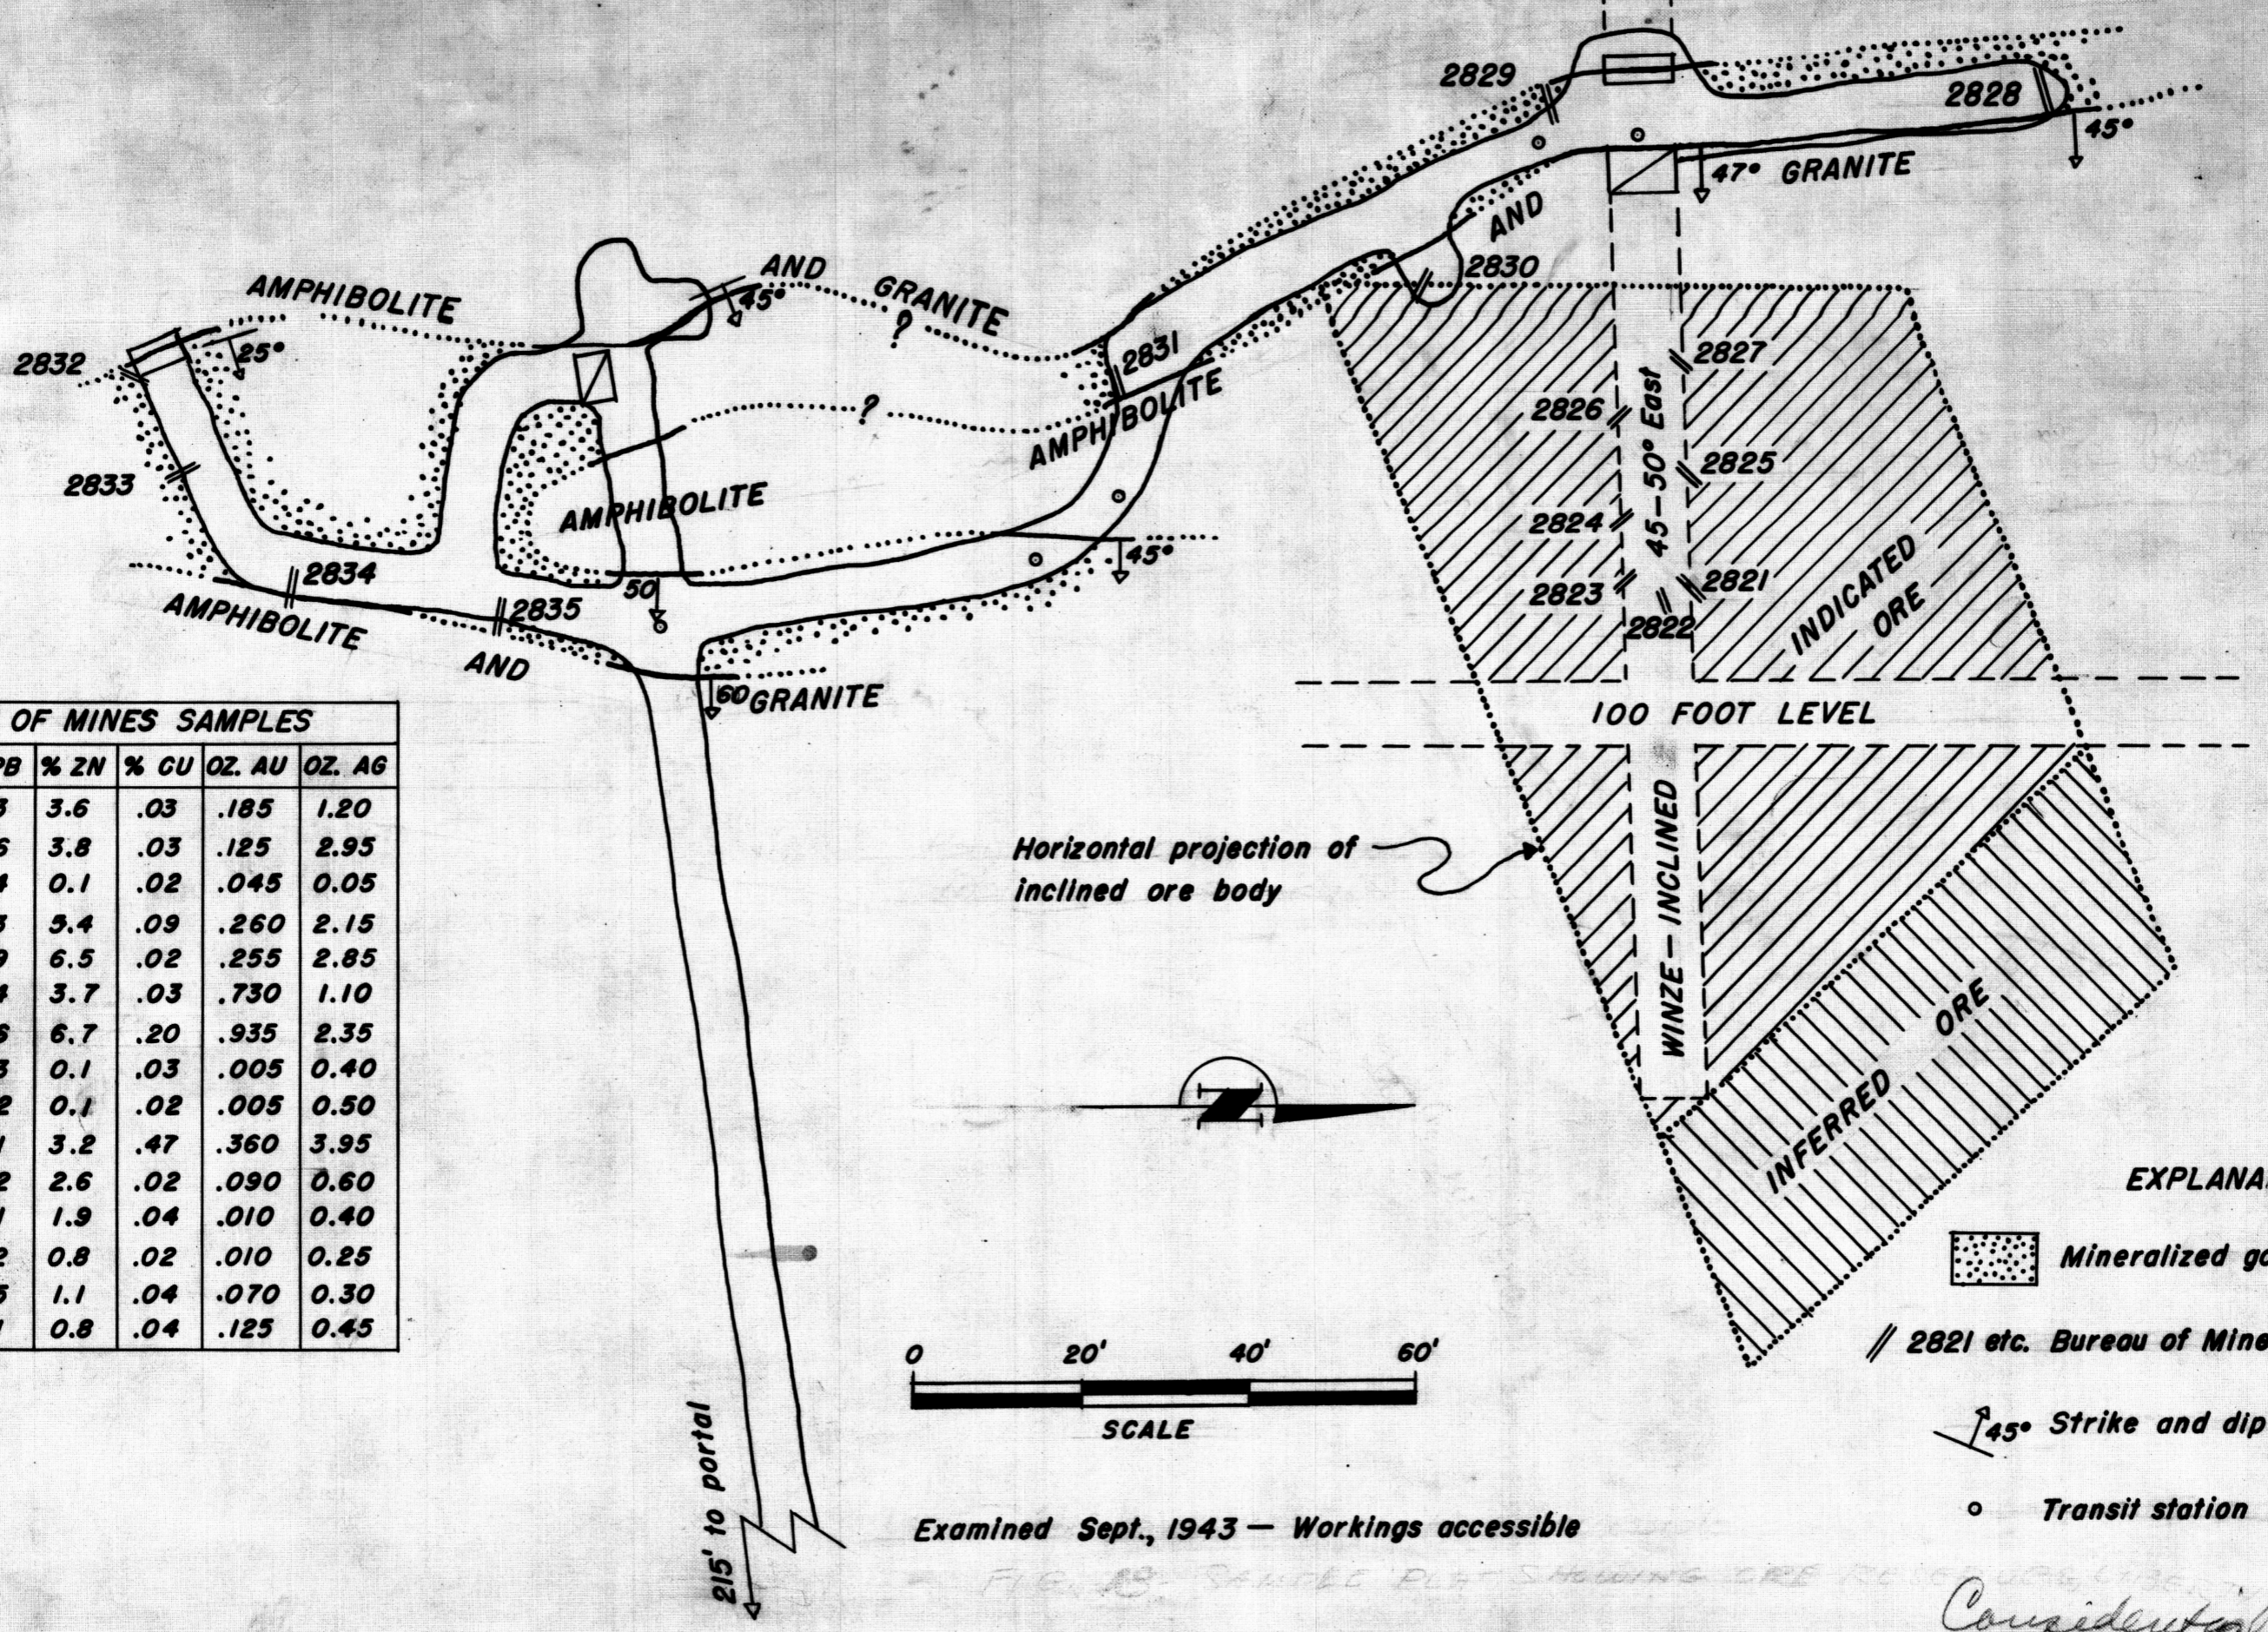

- EXPLANATION**
- Mineralized gouge and breccia
 - 2821 etc. Bureau of Mines samples
 - 45° Strike and dip
 - Transit station

Confidential Plat

FIG. 18-SAMPLE PLAT SHOWING ORE RESERVES, LIBERTY MINE