


EXPLANATION

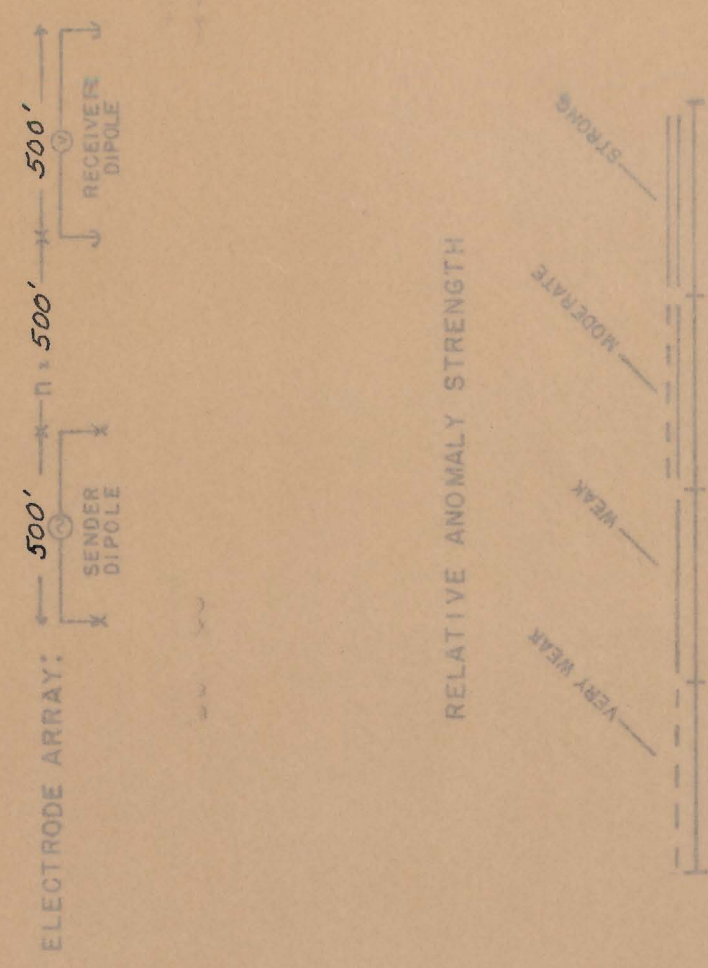

SECTIONAL DATA SHEET  
 LINE No. 2, Spread 1  
 INDUCED POLARIZATION TRAVERSE  
 Barnhard Prospect - Silver Reef Mts. Ariz.  
 HEINRICHS GEOEXPLORATION COMPANY  
 SCALE: 1" = 500' DATE: January 29, 1964  
 FOR  
 C. C. Huston & Associates  
 Toronto, Ontario, Canada

APPARENT RESISTIVITY (rho DC)  
 IN UNITS OF OHM FEET  
 CONTOUR INTERVAL LOGARITHMIC  
 SENDER FREQUENCY: 0.05 cps

PERCENT FREQUENCY EFFECT (PFE)  
 CONTOUR INTERVAL CONSTANT  
 SENDER FREQUENCIES: 0.05 & 3.0 cps

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
 (MCF = PFE x 1000 / rho DC)  
 CONTOUR INTERVAL LOGARITHMIC