



APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

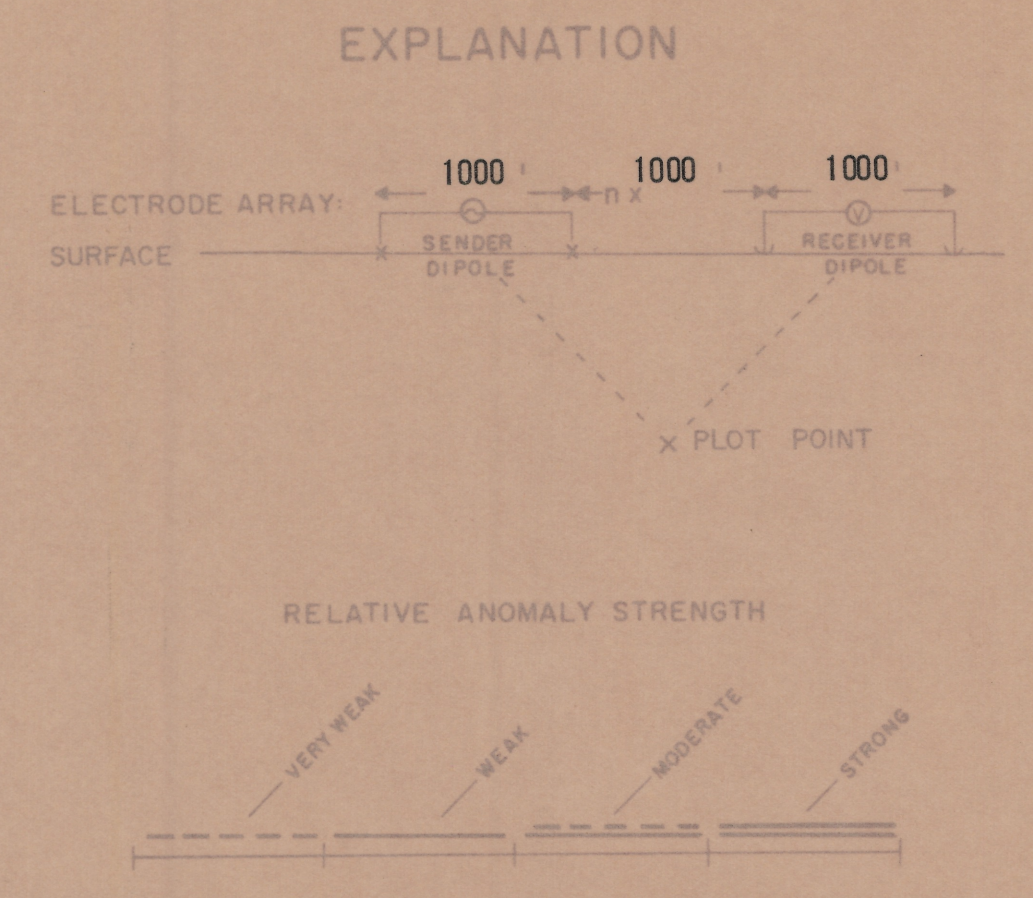


LOOKING NORTH

MIAMI AREA 1 (FLORENCE)
PHASE 2
SECTIONAL DATA SHEET
LINE NO. 12 (SPREADS 1&2)
INDUCED POLARIZATION TRAVERSE


HEINRICH'S GEOEXPLORATION COMPANY
SCALE: 1" = 1000' DATE: JUNE 1967
FOR
MIAMI COPPER COMPANY

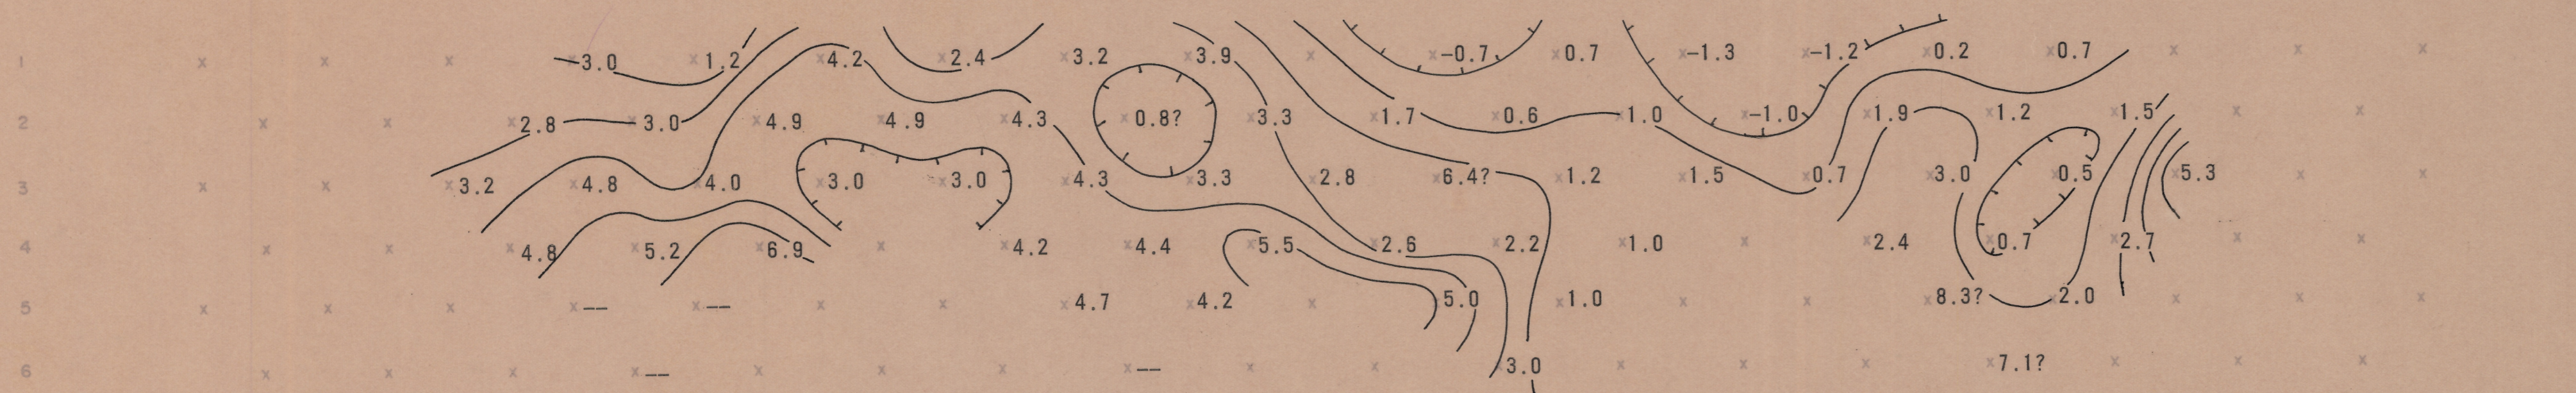

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 1.0 c.p.s.

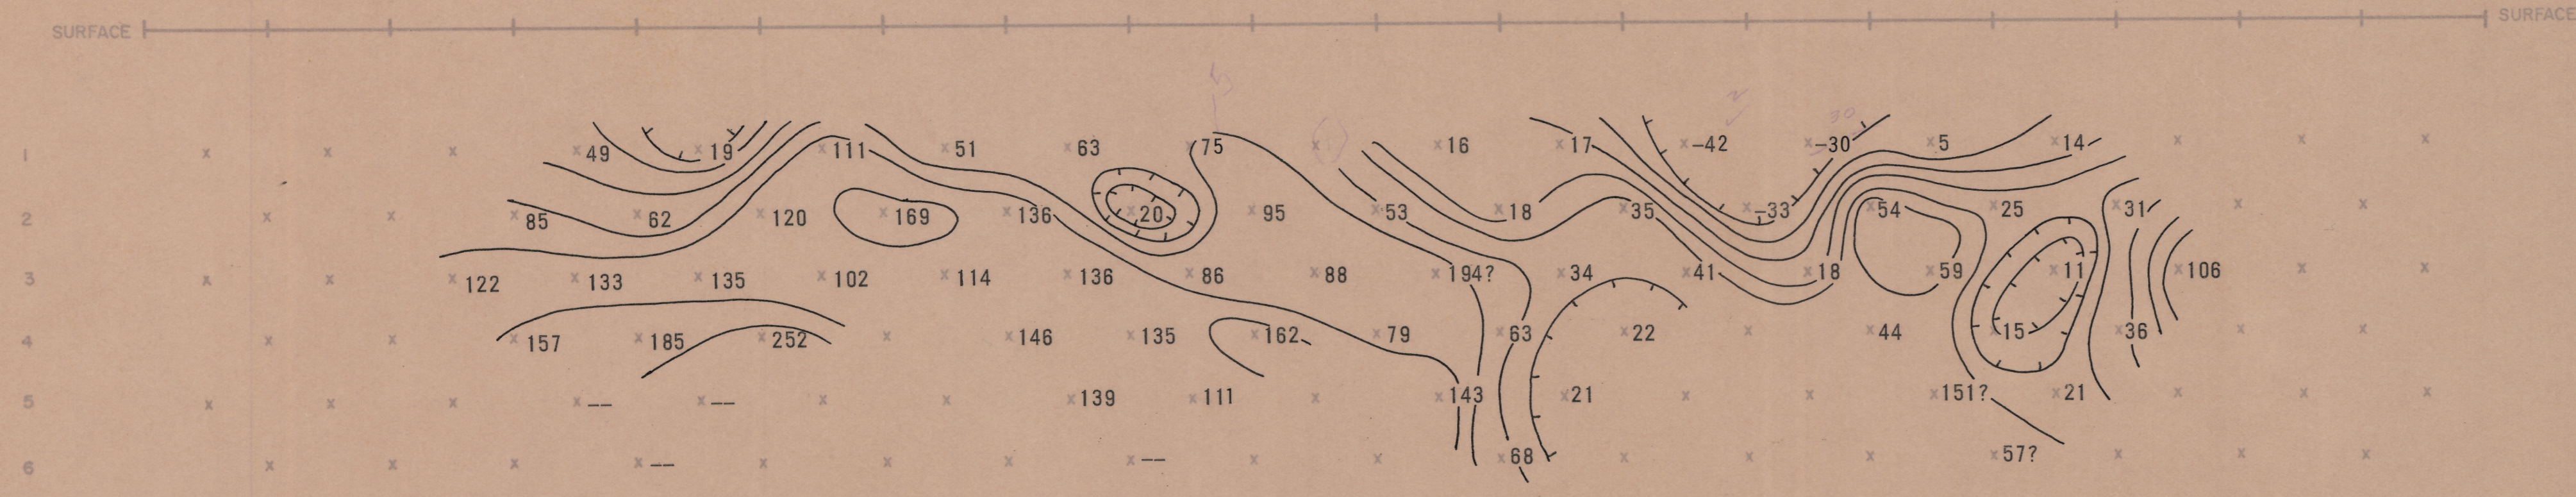

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
(MCF = $\frac{\rho_{DC}}{PFE \times 1000}$)
CONTOUR INTERVAL LOGARITHMIC

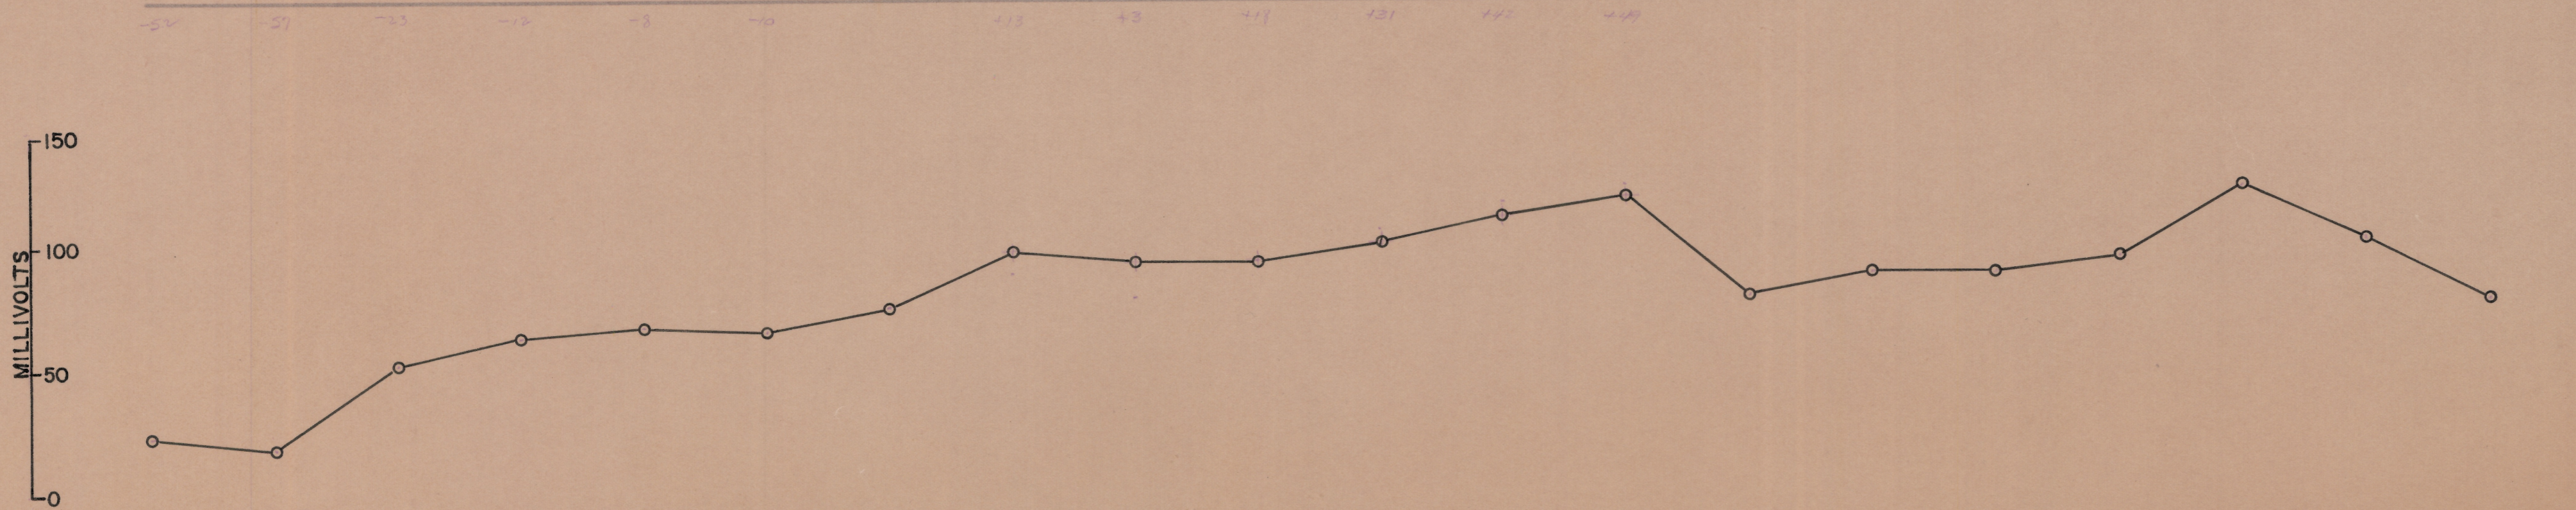

SELF POTENTIAL

8/11-200-10-107 HLE pg bernice 1/1