

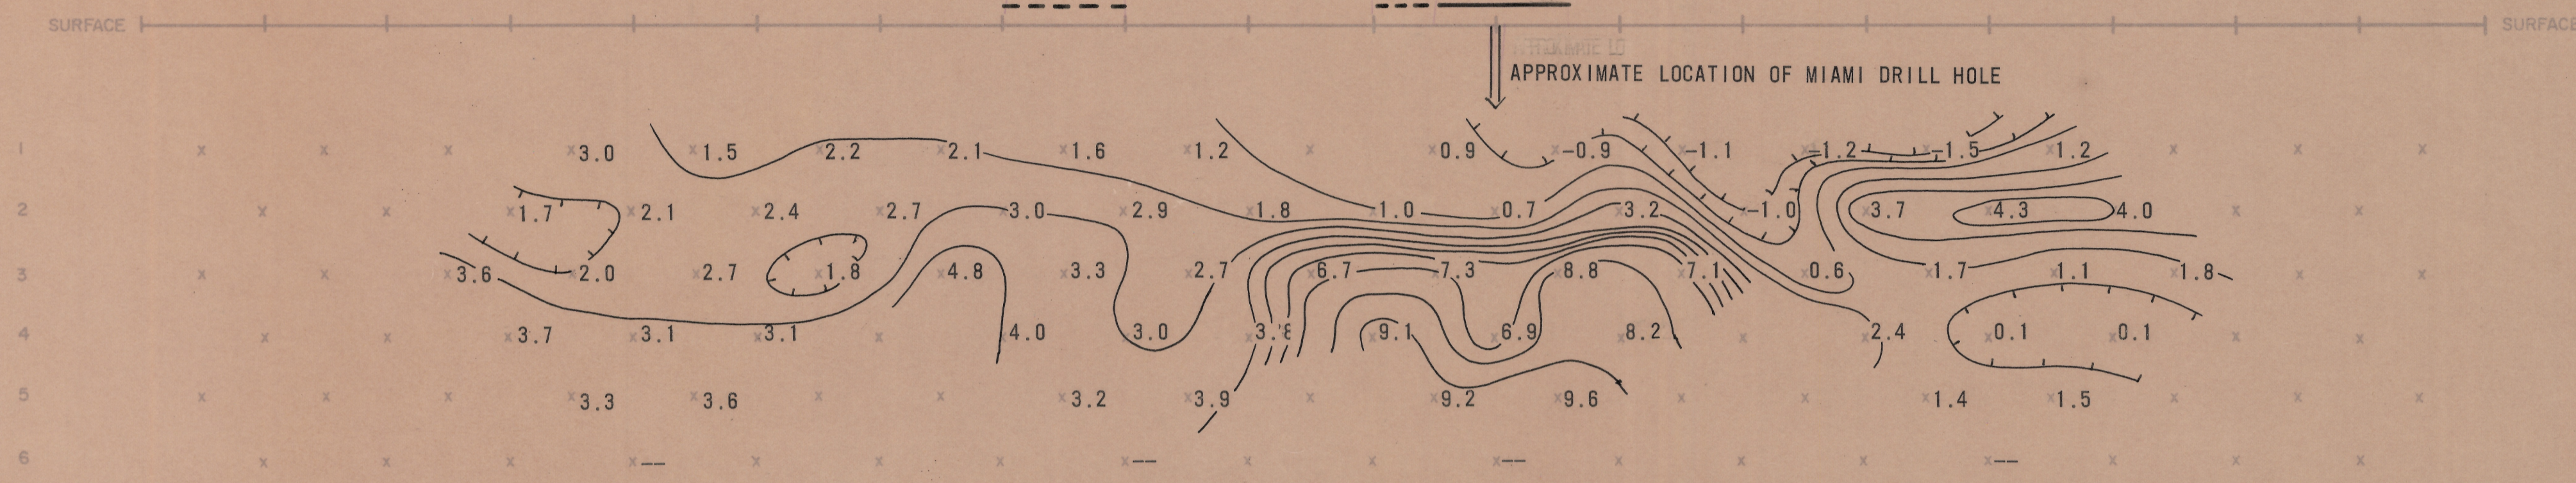
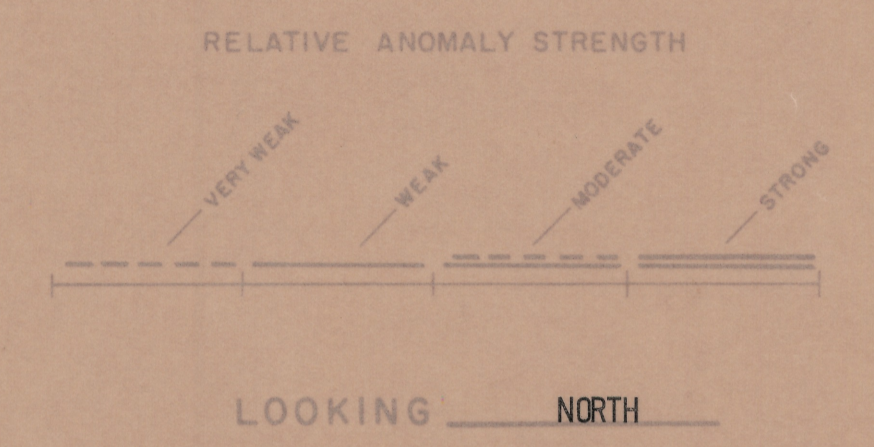


APPARENT RESISTIVITY ( $\rho_{DC}$ )  
IN UNITS OF OHM FEET  $\times 10^4$   
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 c.p.s.

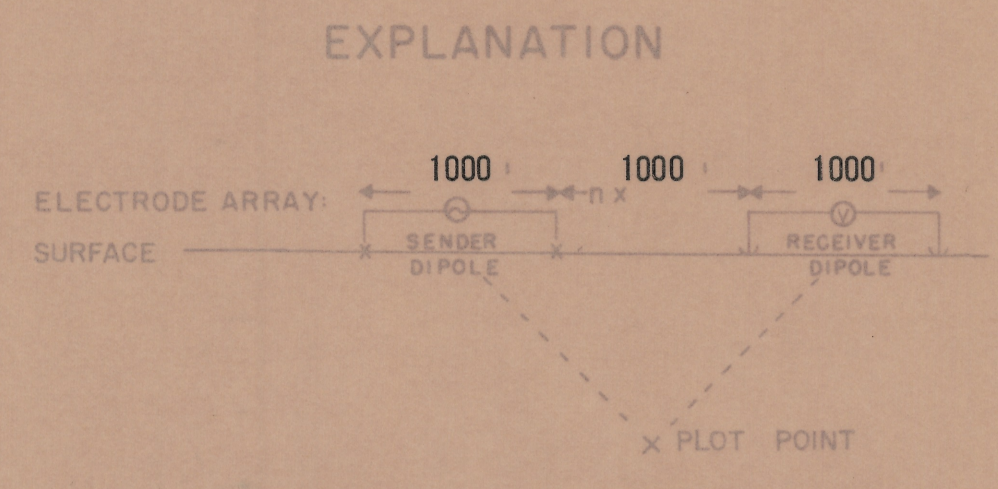

PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 1.0 c.p.s.

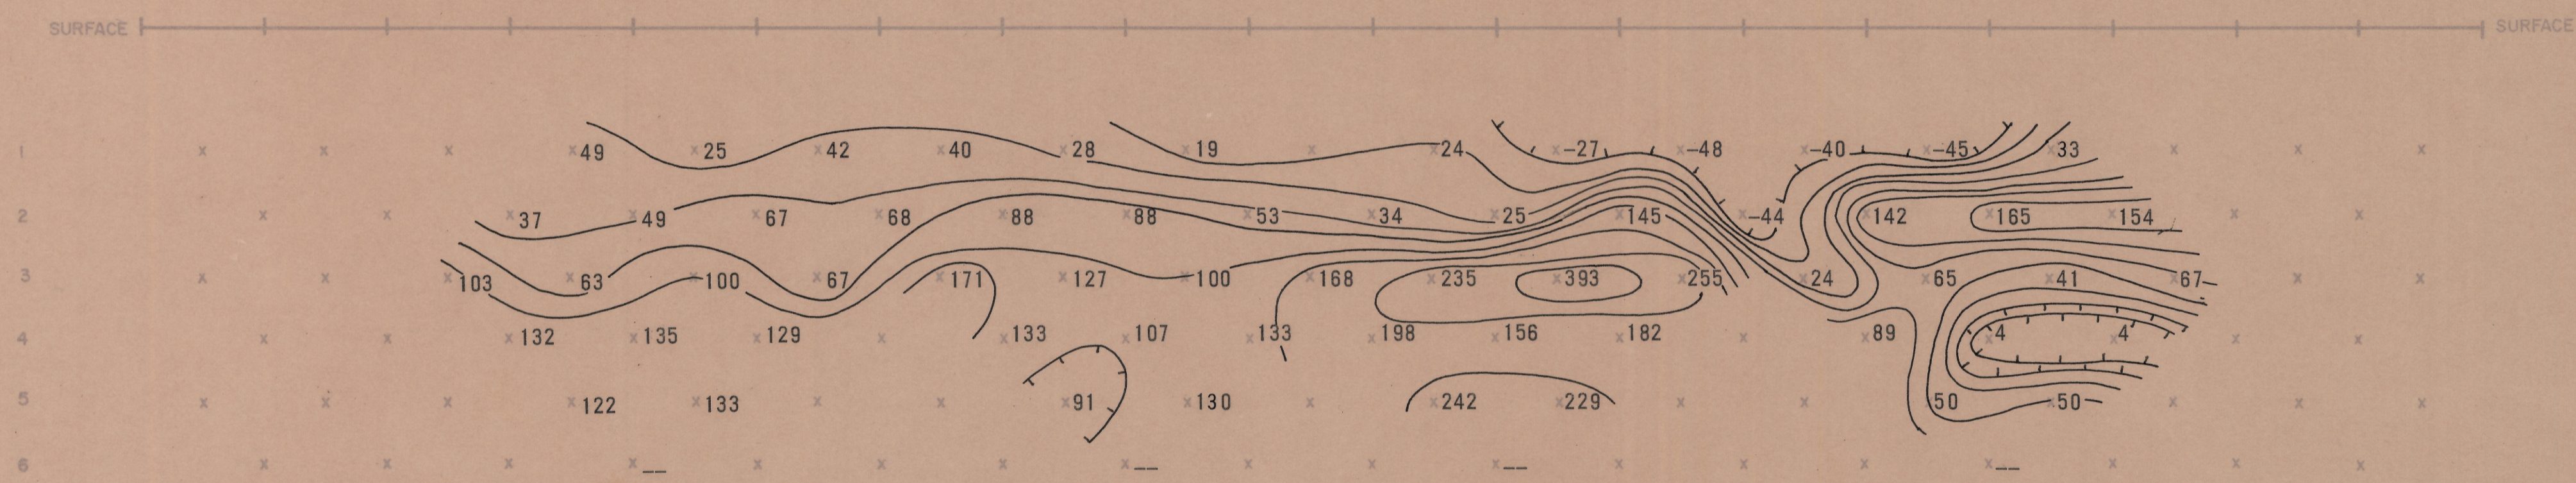

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
( $MCF = PFE \times 1000$ )  
CONTOUR INTERVAL LOGARITHMIC

MIAMI AREA 1 (FLORENCE)  
PHASE 2  
SECTIONAL DATA SHEET  
LINE NO. 13 (SPREADS 1 & 2)  
INDUCED POLARIZATION TRAVERSE  
HEINRICH'S GEOEXPLORATION COMPANY  
SCALE: 1" = 1000' DATE: JUNE 1967  
FOR  
MIAMI COPPER COMPANY



SELF POTENTIAL

10/11-200-10-105 H/15 88 hennas 1