

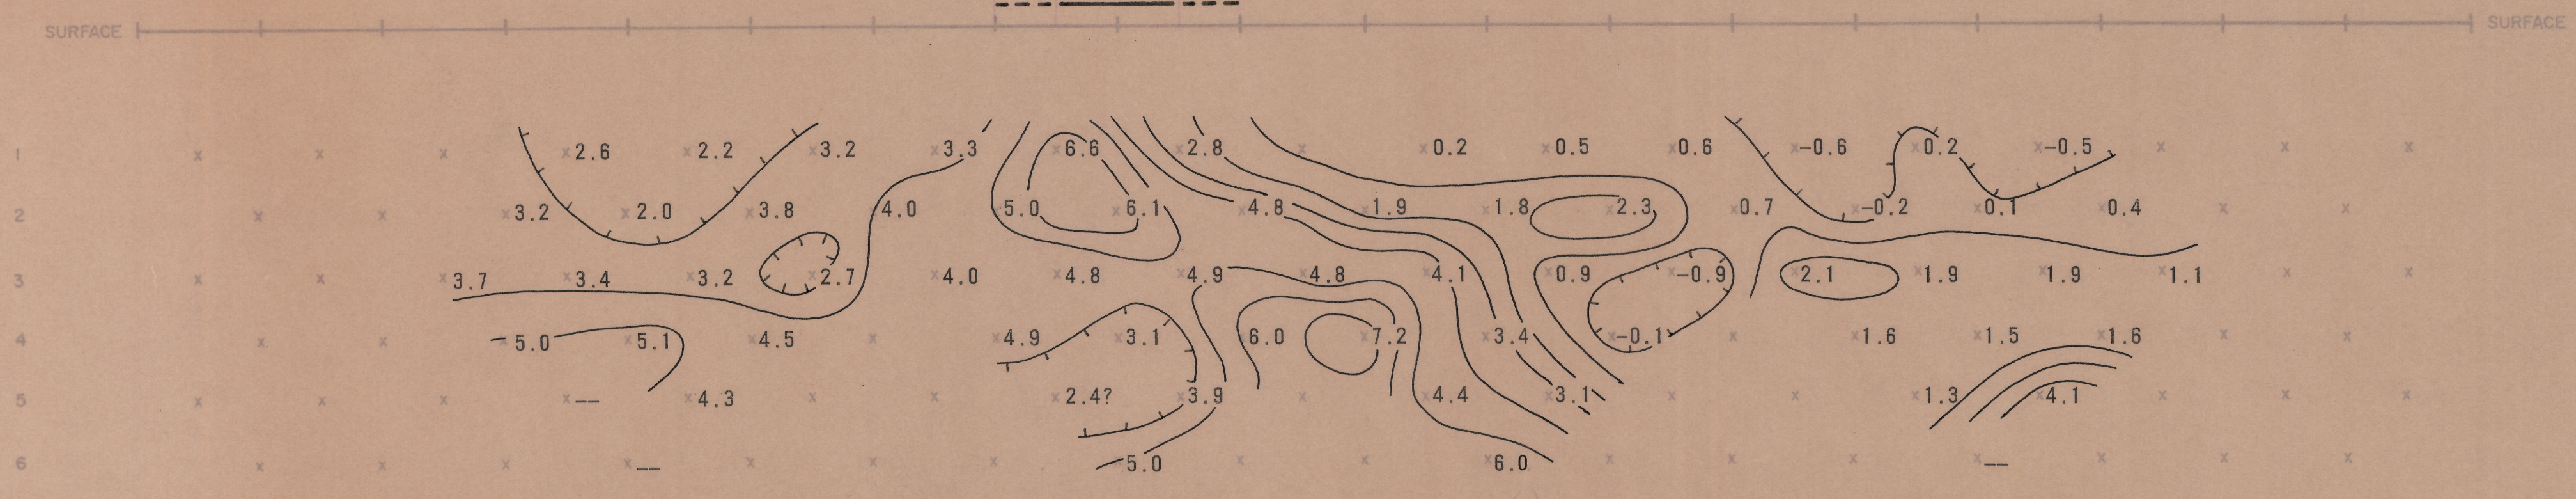


APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET/2T
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

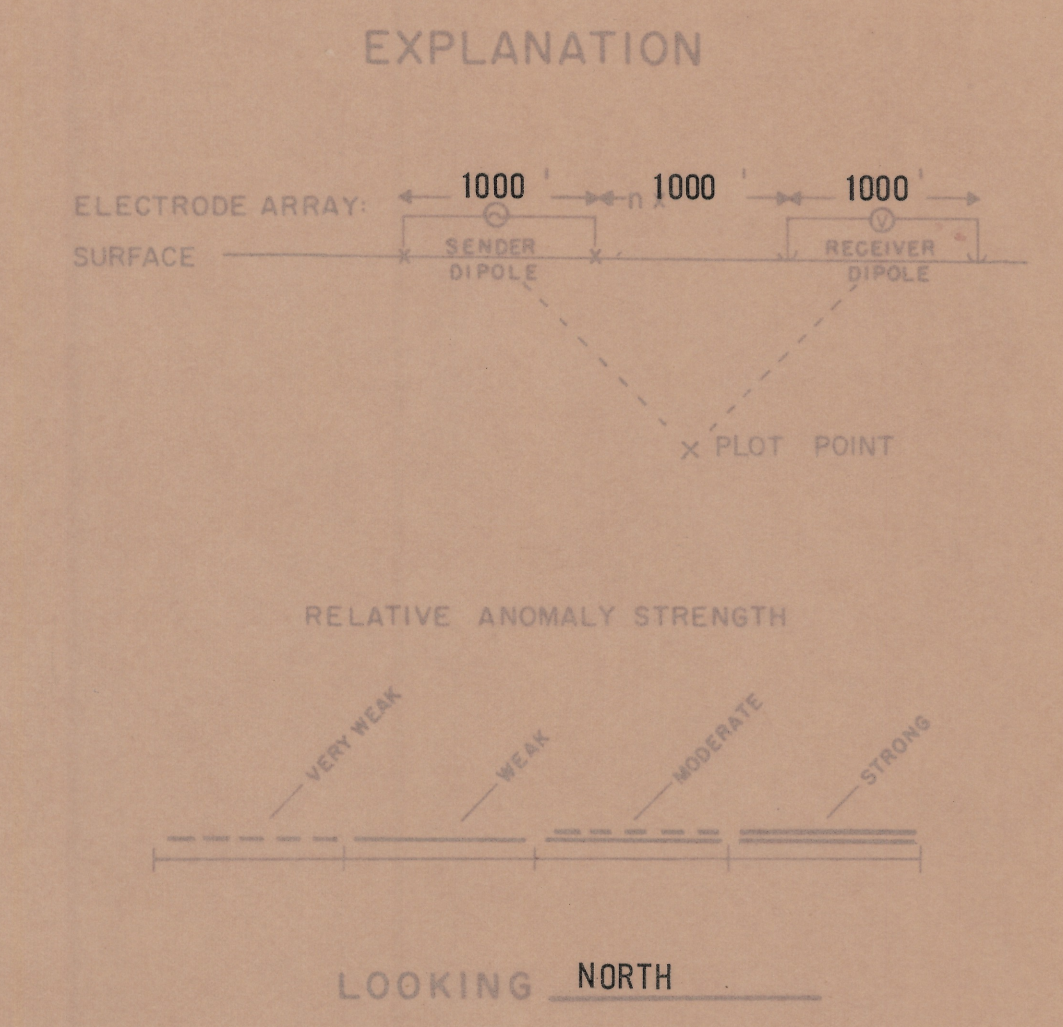


PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 1.0 c.p.s.

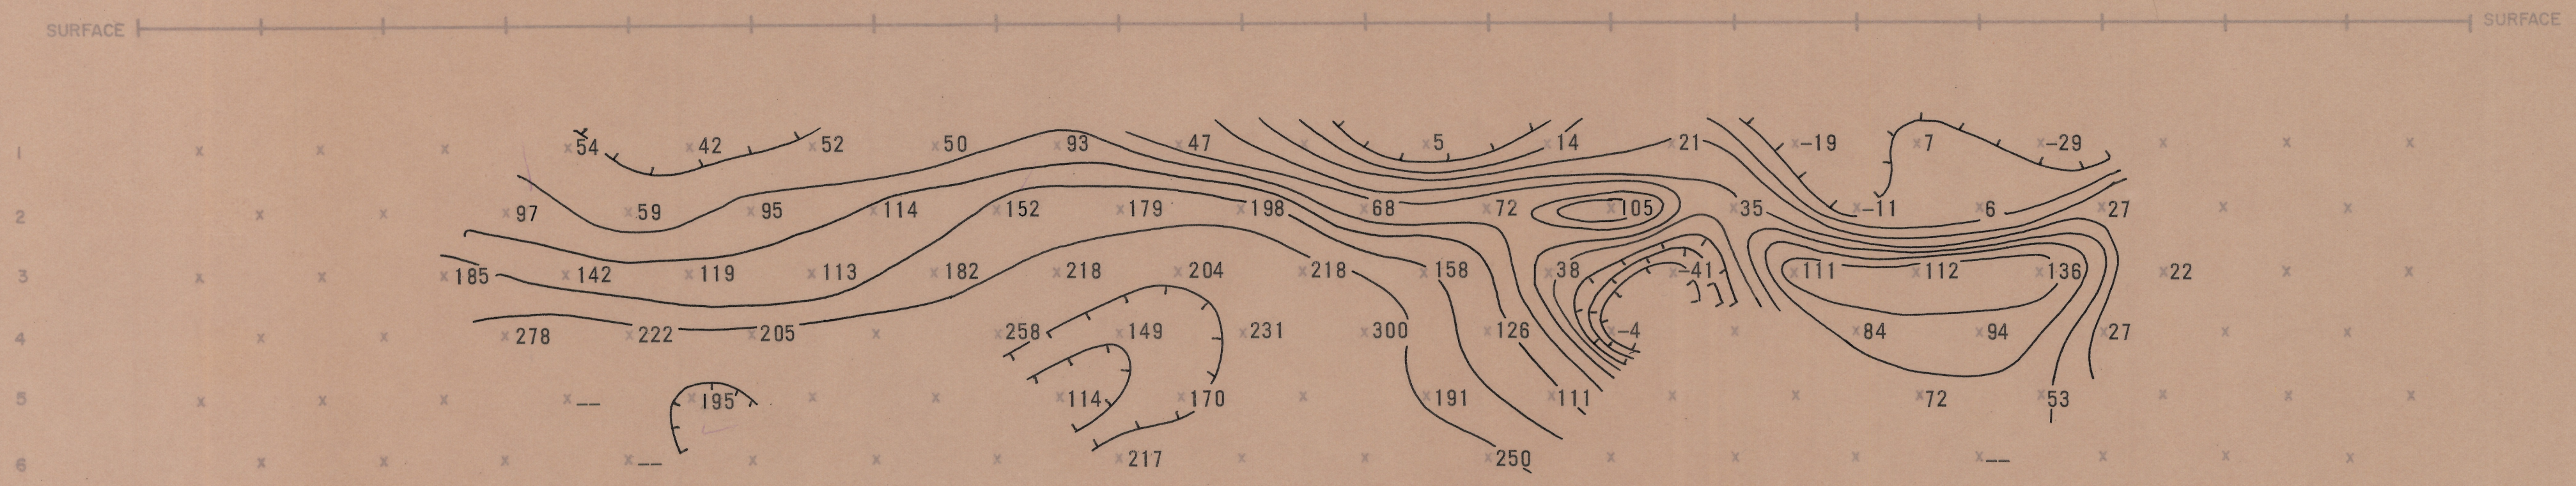

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
(MCF = PFE x 1000)
CONTOUR INTERVAL LOGARITHMIC

MIAMI AREA 1 (FLORENCE)
PHASE 2
SECTIONAL DATA SHEET
LINE NO. 14 (SPREADS 1 & 2)
INDUCED POLARIZATION TRAVERSE
HEINRICH'S GEOEXPLORATION COMPANY
SCALE: 1" = 1000' DATE: JUNE 1967
FOR
MIAMI COPPER COMPANY

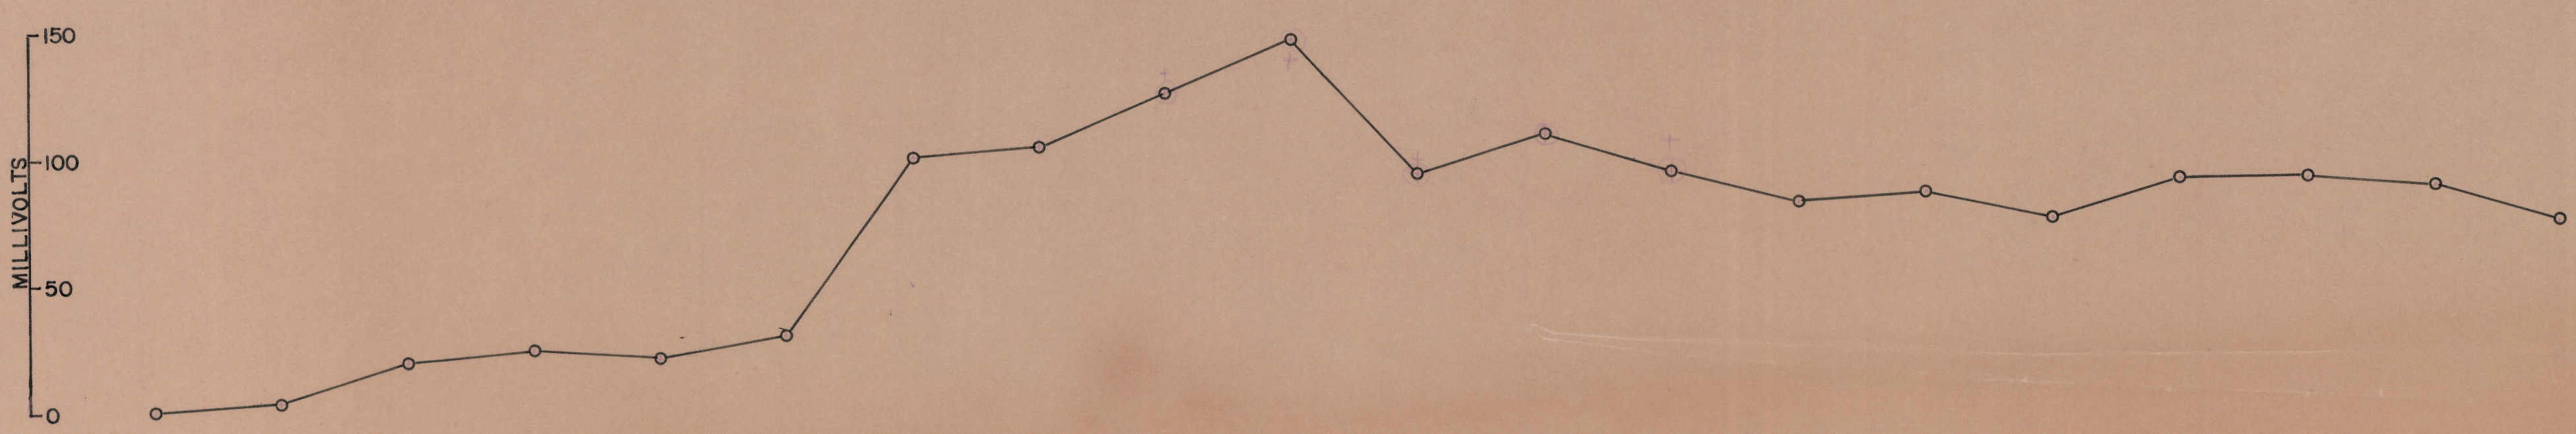

SELF POTENTIAL

011-200-10-100 WLS 98 10/10/67