


Looking Northerly


ELECTRODES STATIONS 3.0W 2.5W 2.0W 1.5W 1.0W 0.5W 0 E/W 0.5E 1.0E 1.5E 2.0E 2.5E 3.0E

Interval between sender & receiver dipoles


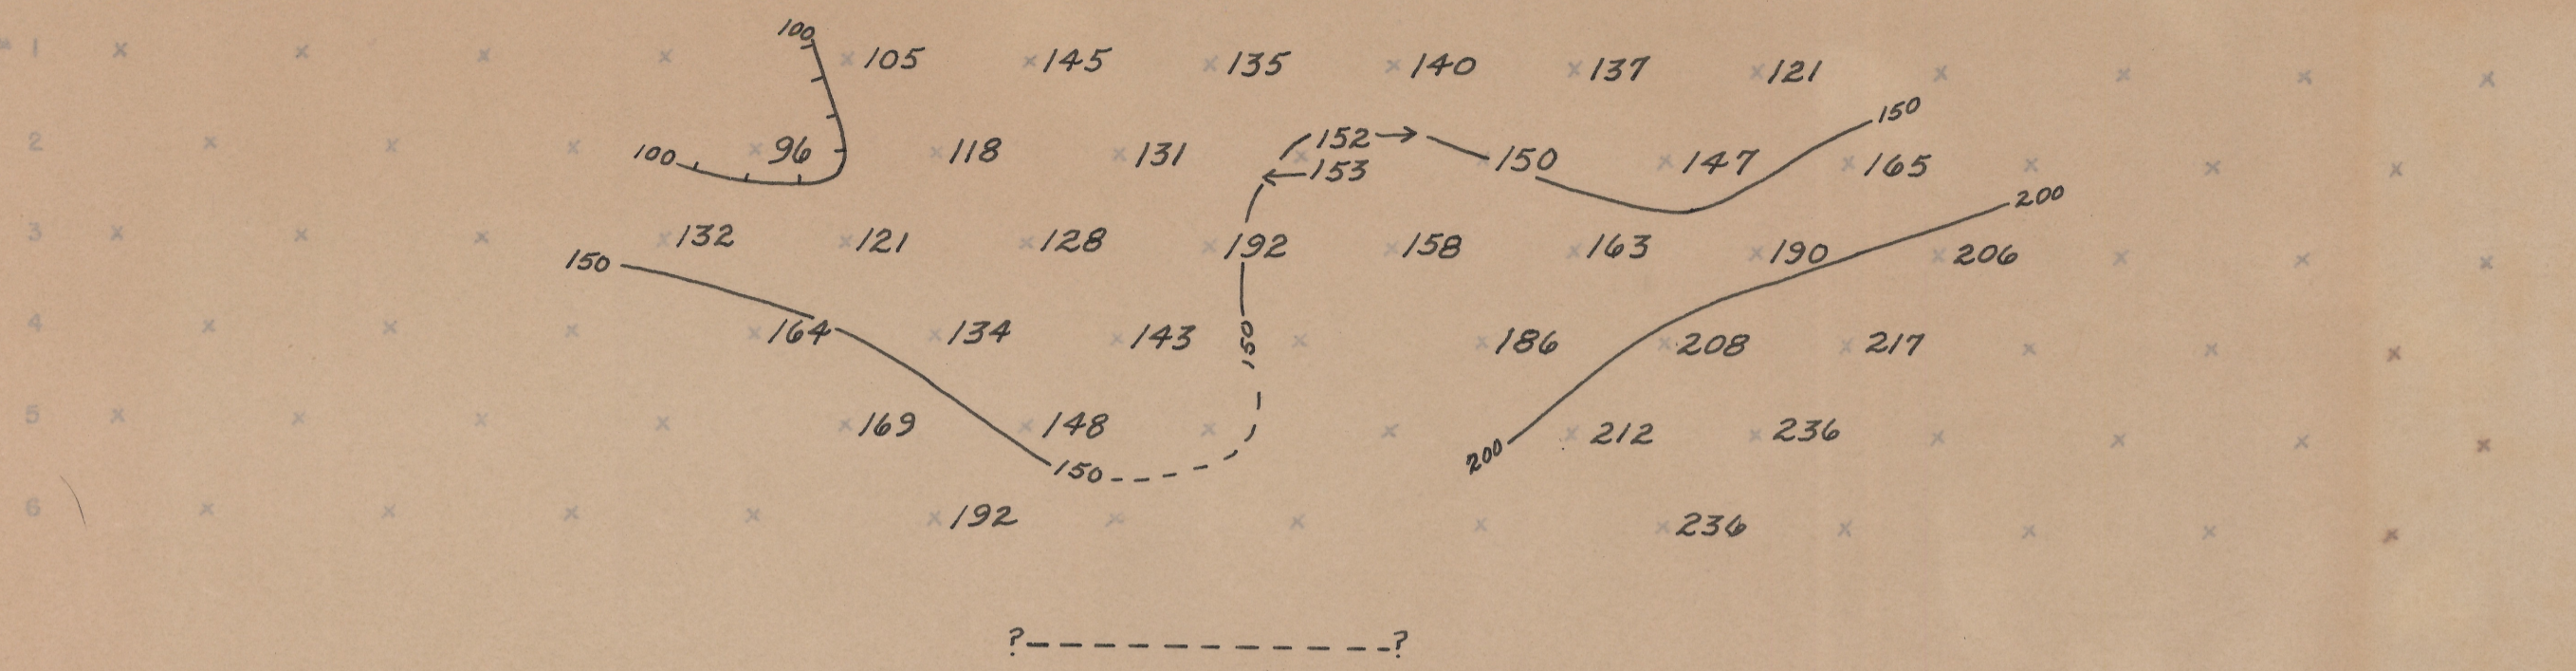


APPARENT RESISTIVITY (PDC) IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 cps


EXPLANATION

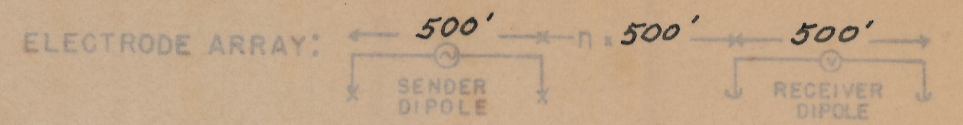

RELATIVE ANOMALY STRENGTH

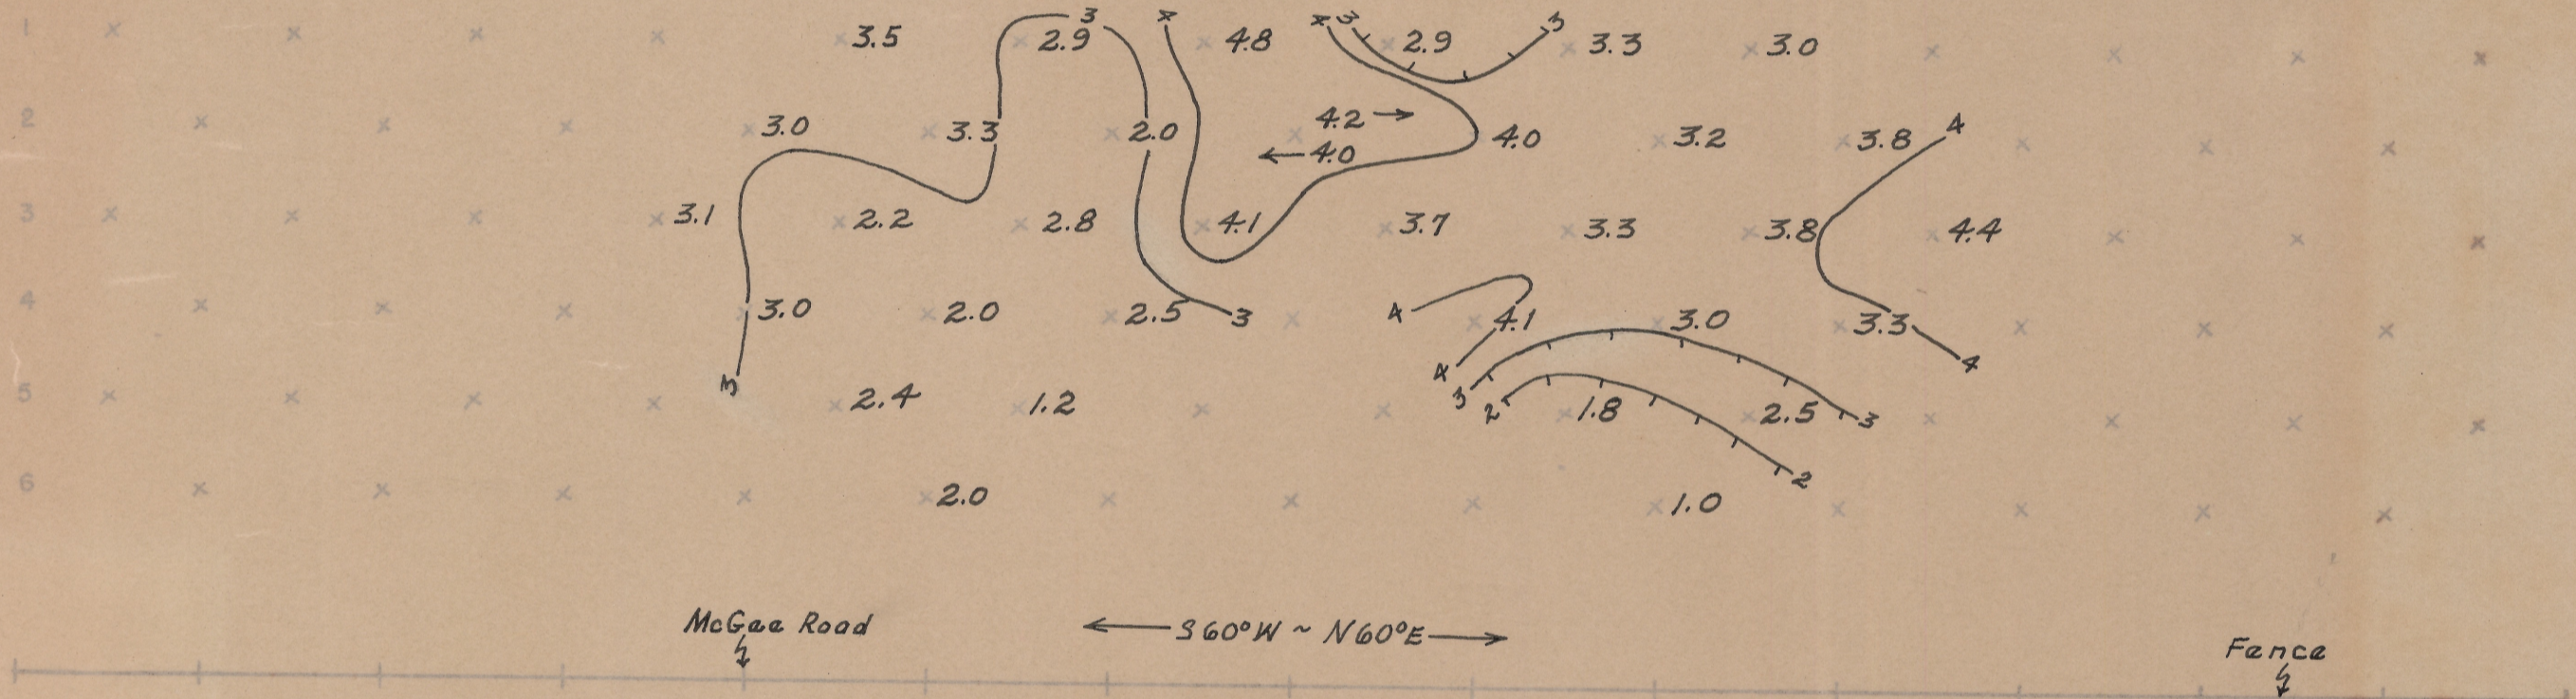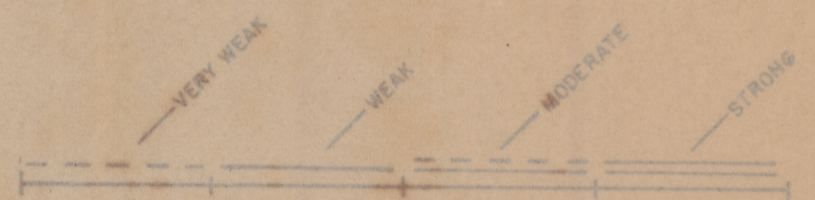

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 cps

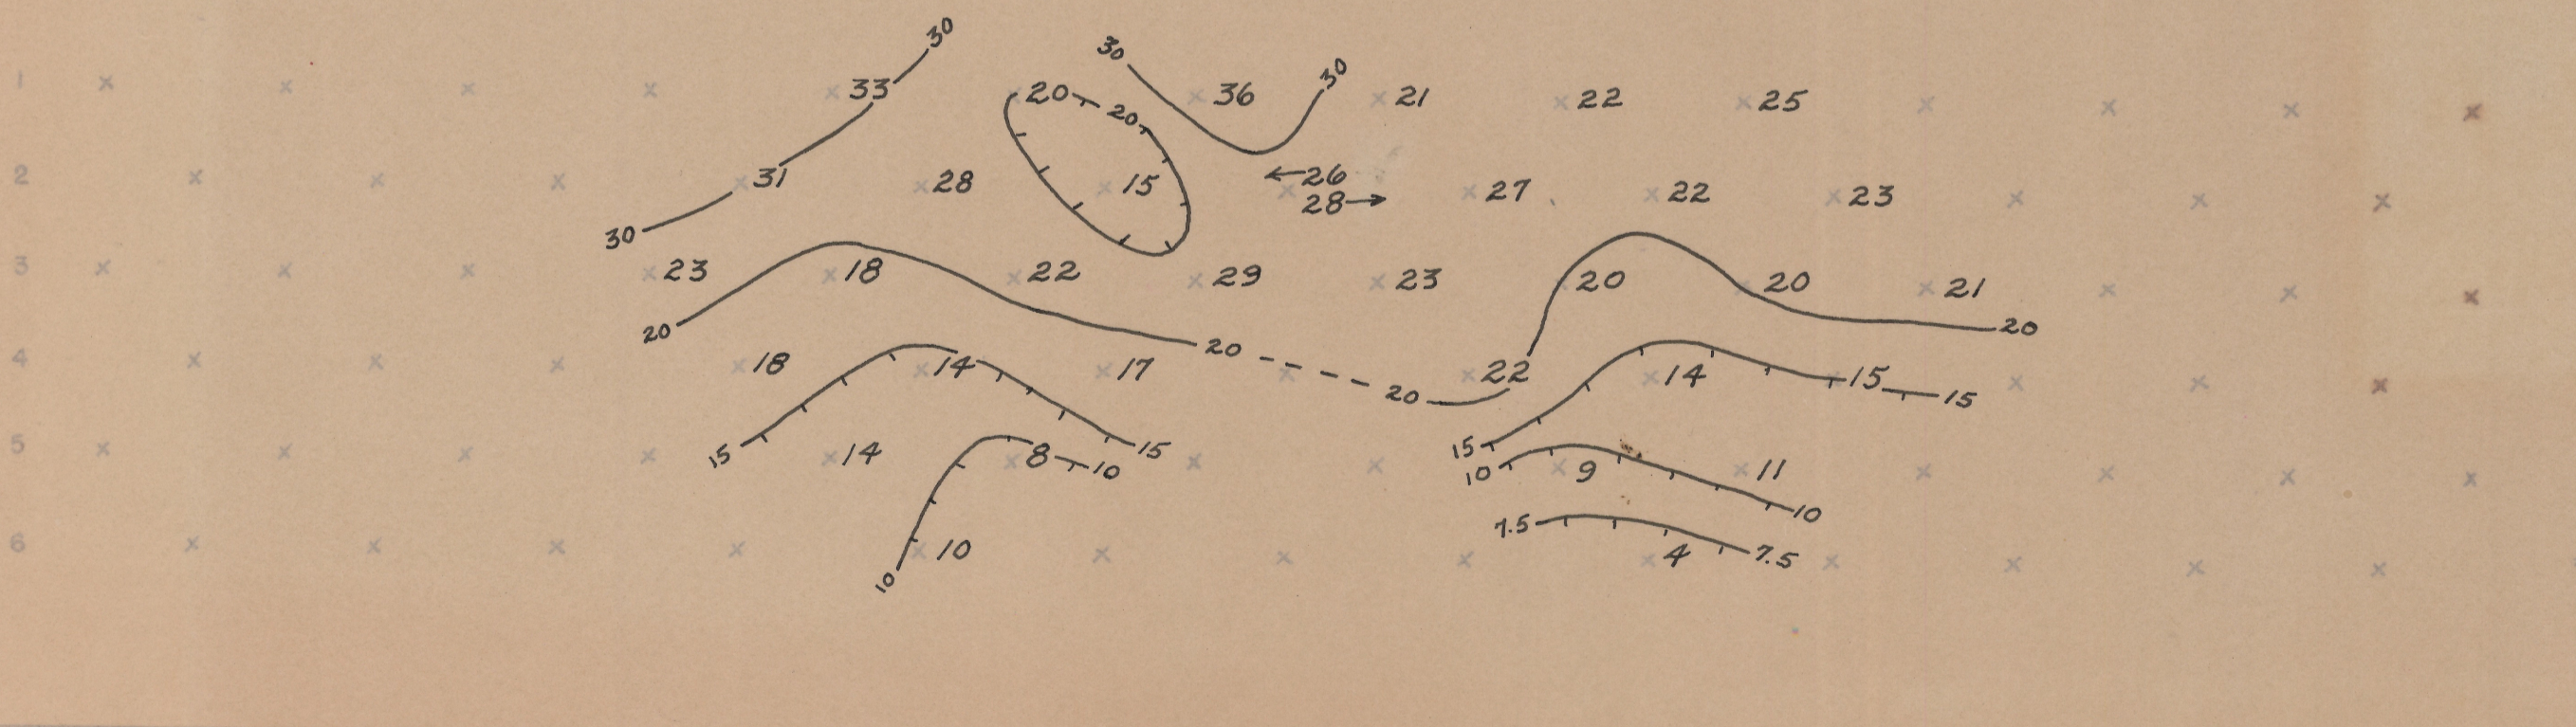

APPARENT "METALLIC CONDUCTION" FACTOR (MGF) CONTOUR INTERVAL LOGARITHMIC

SECTIONAL DATA SHEET

LINE No. 1

INDUCED POLARIZATION TRAVERSE
Duval Extension Claims,
Twin Buttes Mining District
HEINRICH'S GEOEXPLORATION COMPANY

SCALE: 1" = 500'

DATE: February 1964

FOR
J. A. WOOLSEY
Tucson, Arizona

SELF POTENTIAL SURFACE PROFILE GEOLOGY, ETC.

1500-1000-100 Mc 50 200000