



ELECTRODE STATIONS SURFACE 60S 50 40 30 20 10 0-N/S 10 20 30 40 50 60N SURFACE

D INTERVAL BETWEEN SENDER & RECEIVER DIPOLES

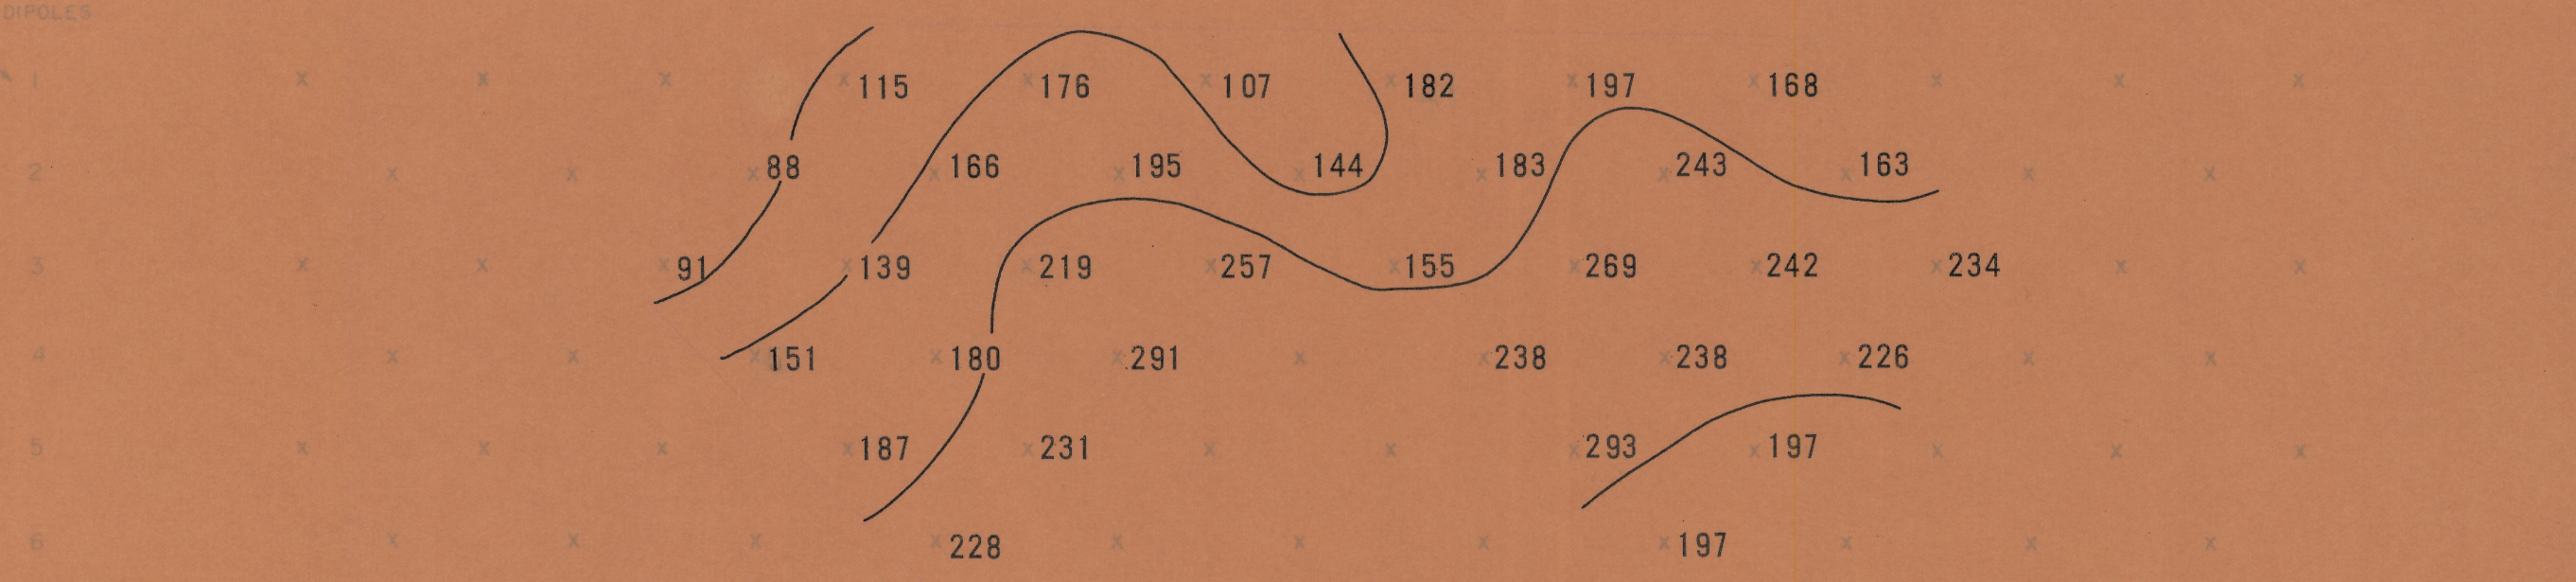

APPARENT RESISTIVITY ( $\rho_a$ ) IN UNITS OF OHM FEET FT  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 CPS

EXPLANATION

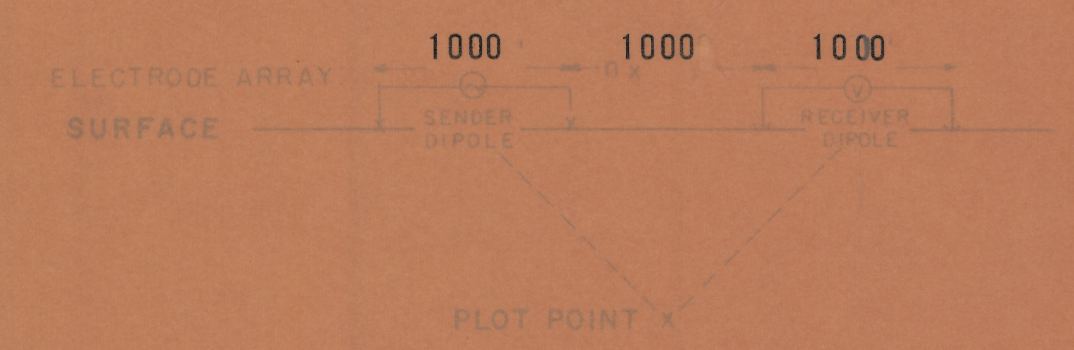


RELATIVE ANOMALY STRENGTH




LOOKING N 79° W

SURFACE SURFACE

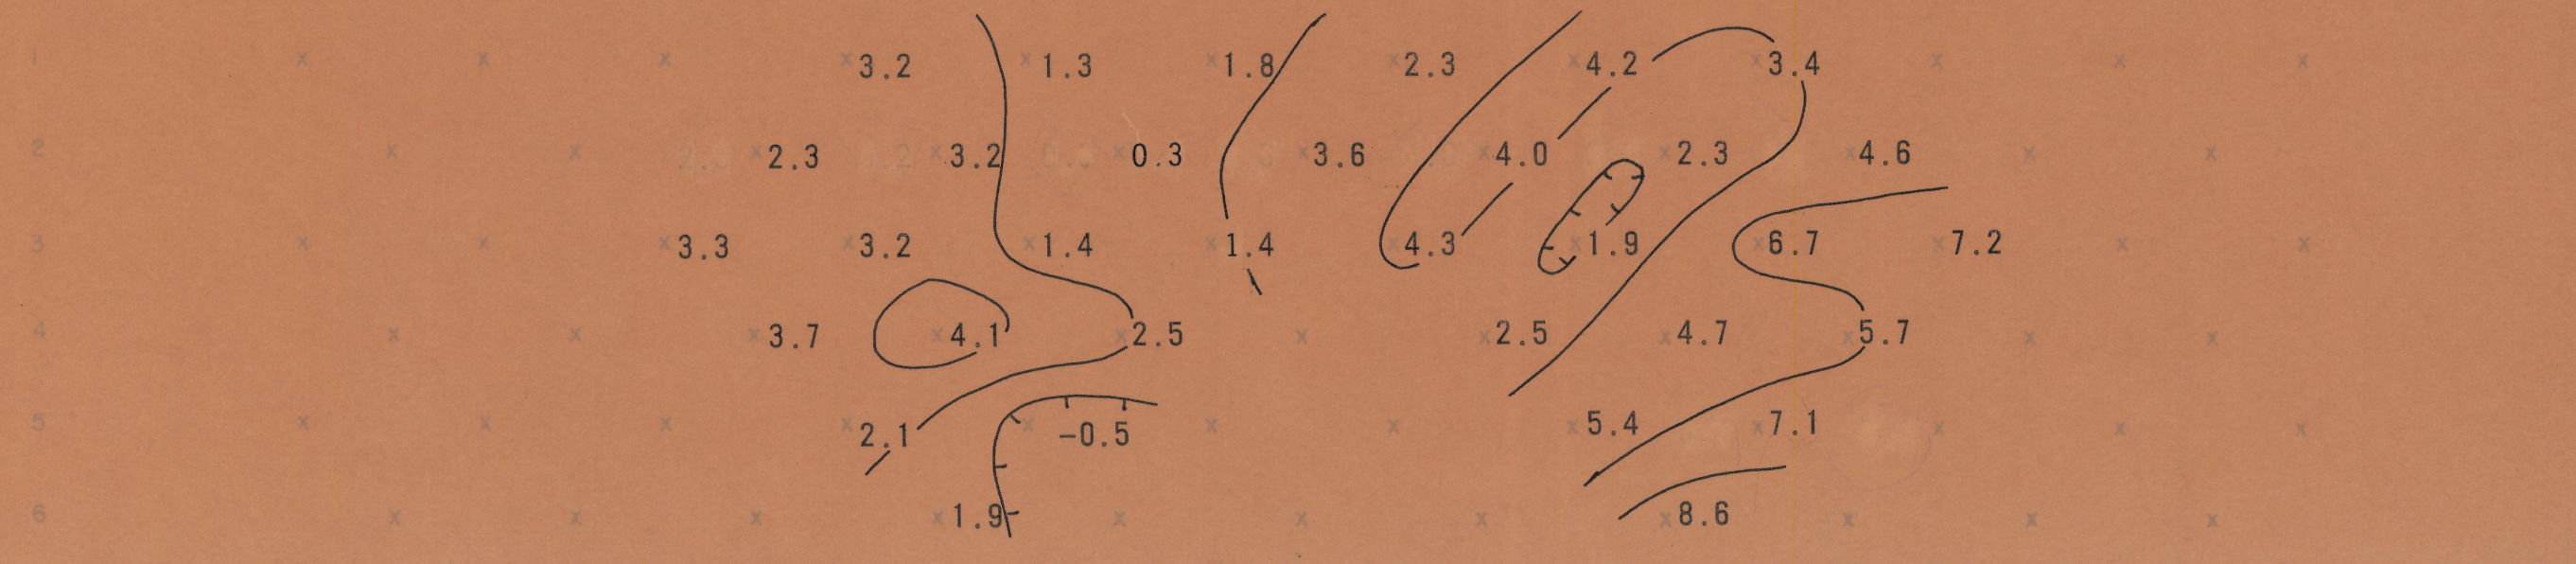

PERCENT FREQUENCY OF RECT (PFR)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 1.0 CPS

SURFACE SURFACE

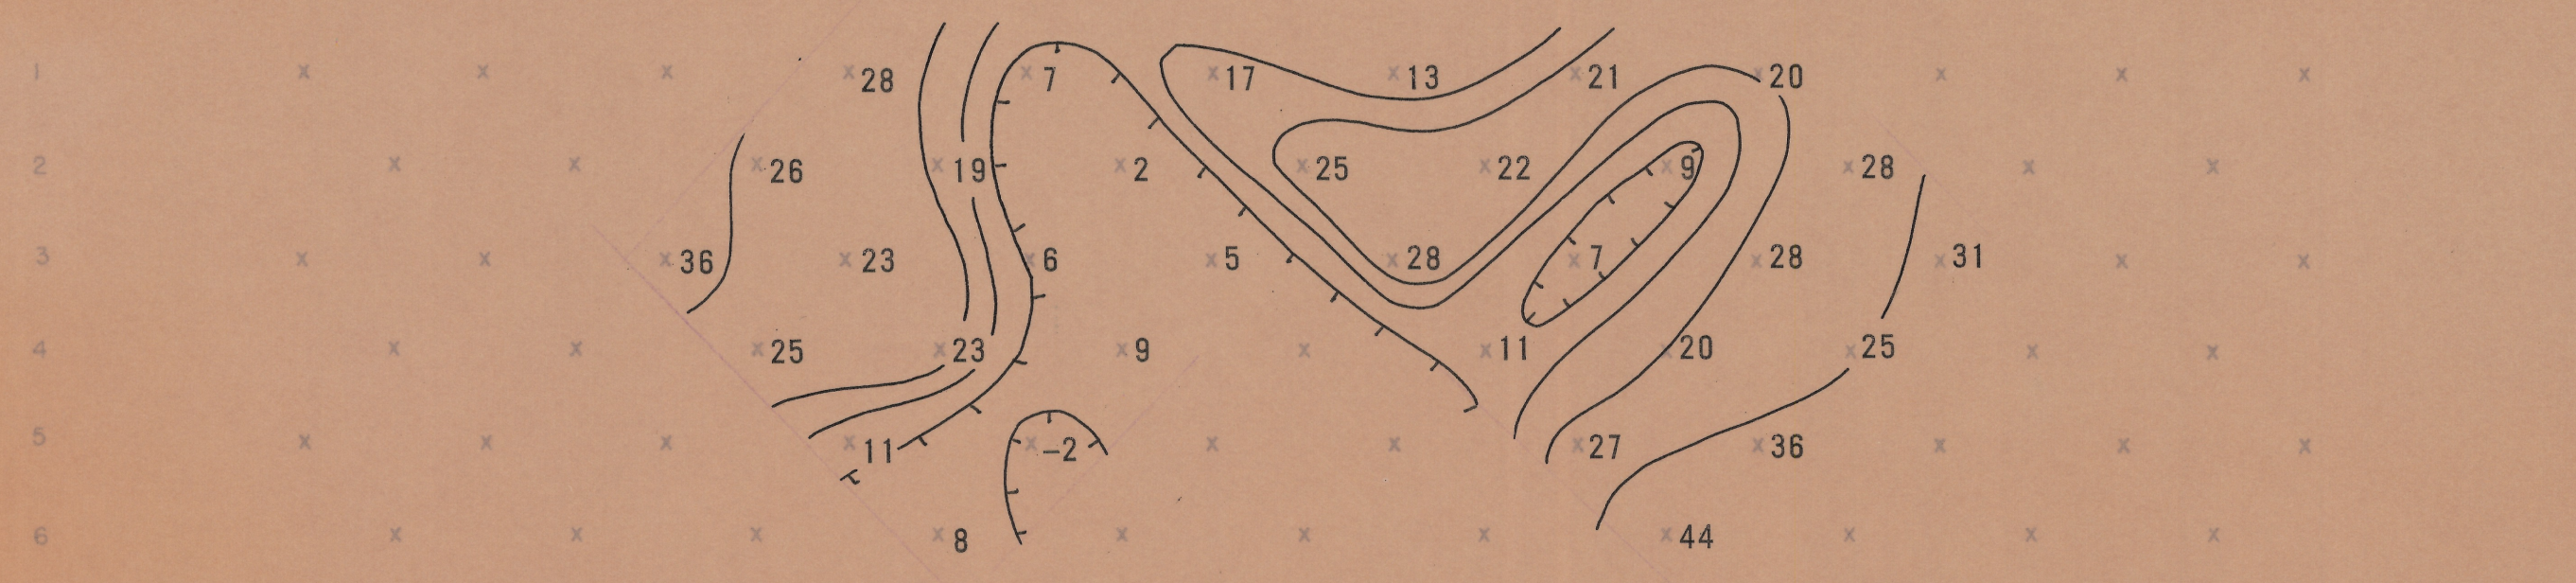

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
(MCF =  $\frac{\rho_a}{PFR \times 1000}$ )  
CONTOUR INTERVAL LOGARITHMIC

ALPHA DELTA CLAIMS

SECTIONAL DATA SHEET

LINE NO. 3

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000' DATE: JUNE 1967

FOR

PICK ENTERPRISES

SELF POTENTIAL

