



APPARENT RESISTIVITY (P.D.)
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 305 CPS


EXPLANATION

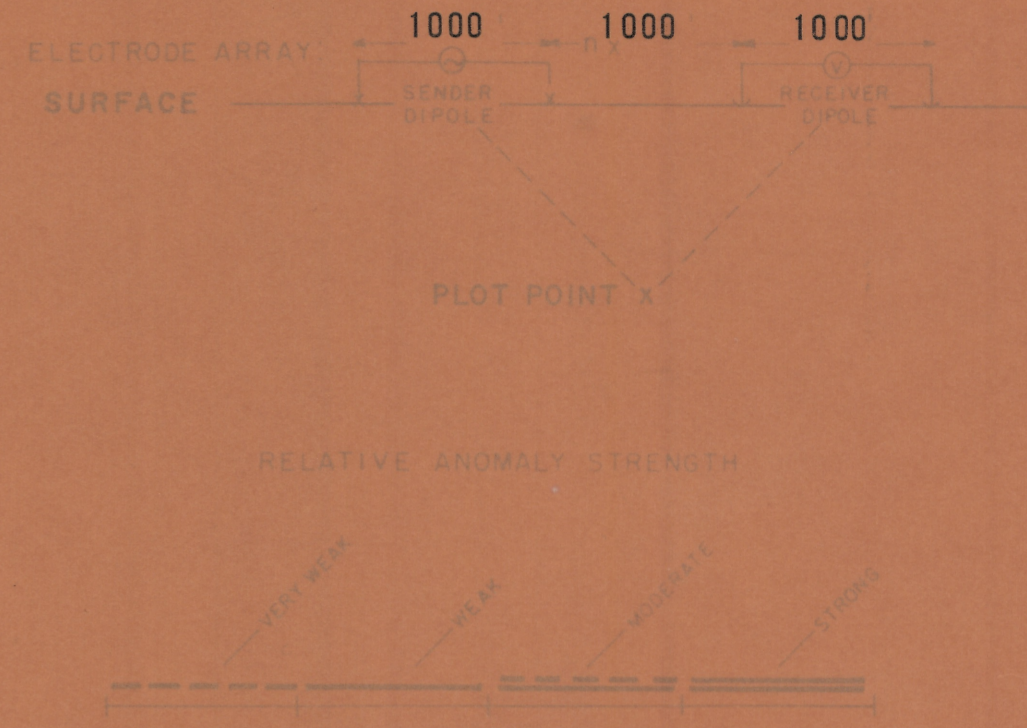

LOOKING S 11° W

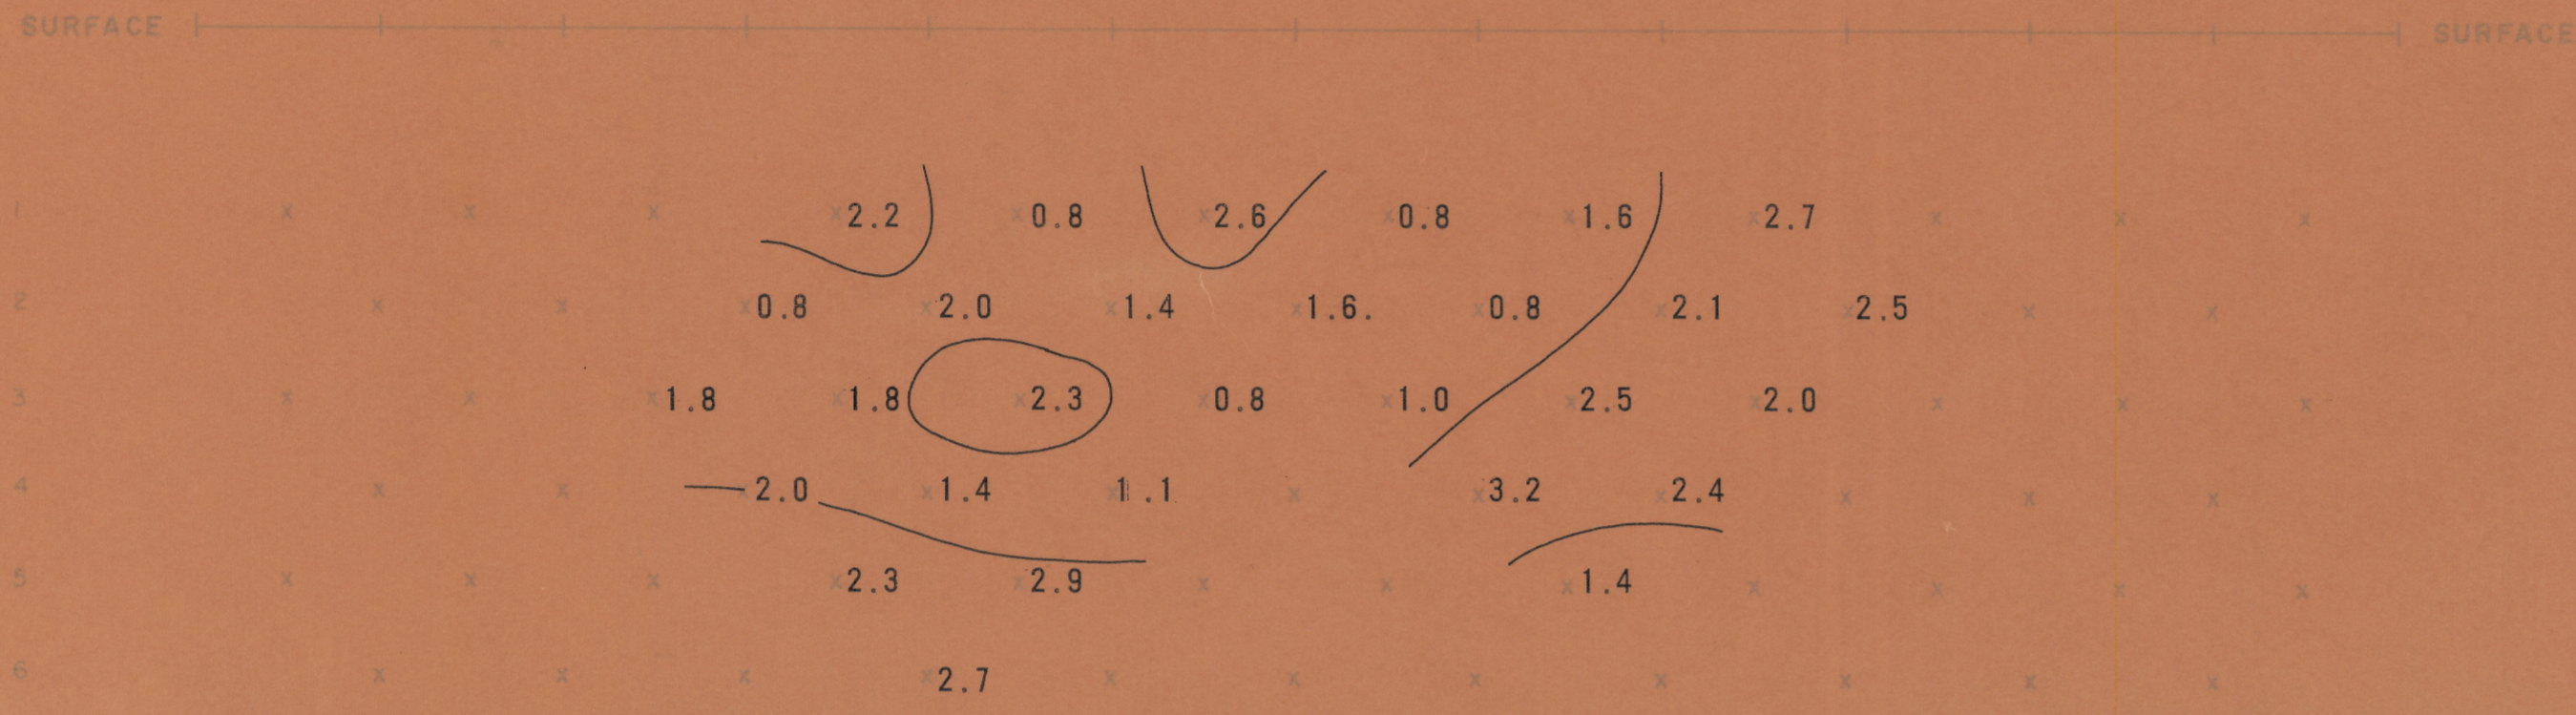

PERCENT FREQUENCY EFFECT (PEE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 305 & 100 CPS

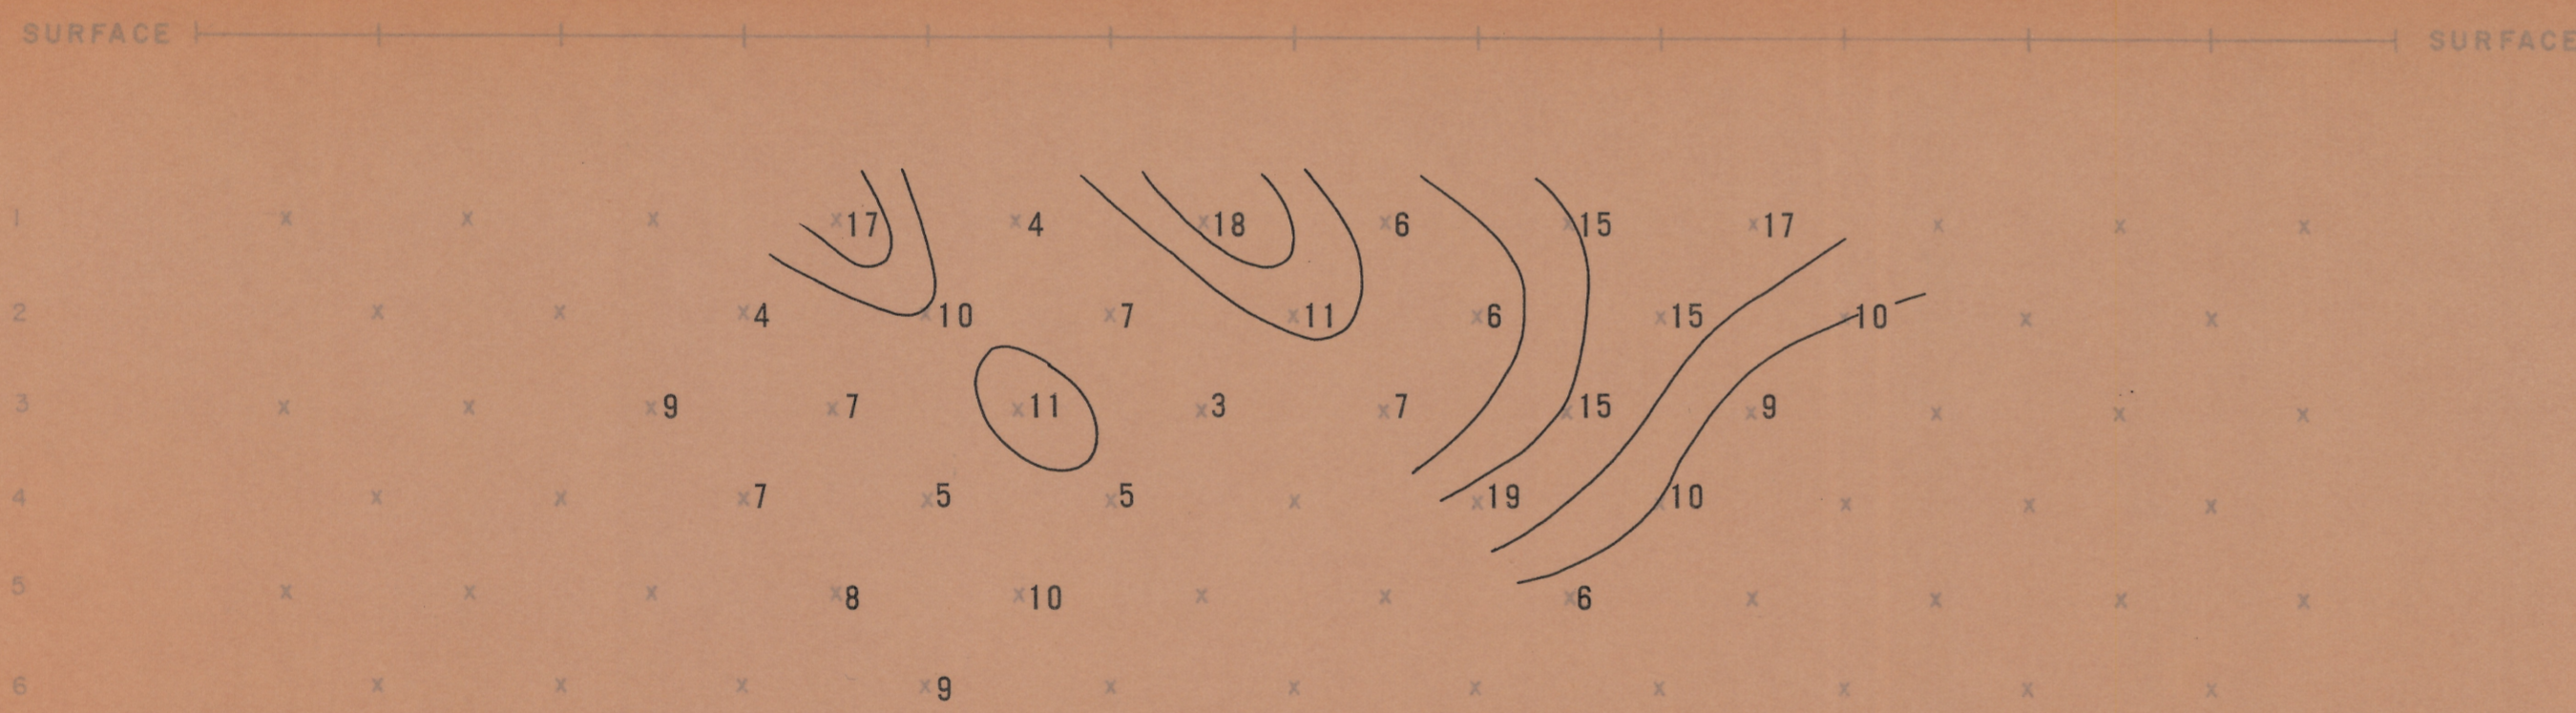

APPARENT METALLIC CONDUCTION FACTOR (MCF)
(MCF = $\frac{P.D.}{P.E.E. \times 1000}$)
CONTOUR INTERVAL LOGARITHMIC

ALPHA DELTA CLAIMS
SECTIONAL DATA SHEET
LINE NO. 4
INDUCED POLARIZATION TRAVERSE
HEINRICH'S GEOEXPLORATION COMPANY
SCALE: 1" = 1000' DATE: JUNE 1967

FOR
PICK ENTERPRISES

SELF POTENTIAL

