



SPREAD 1

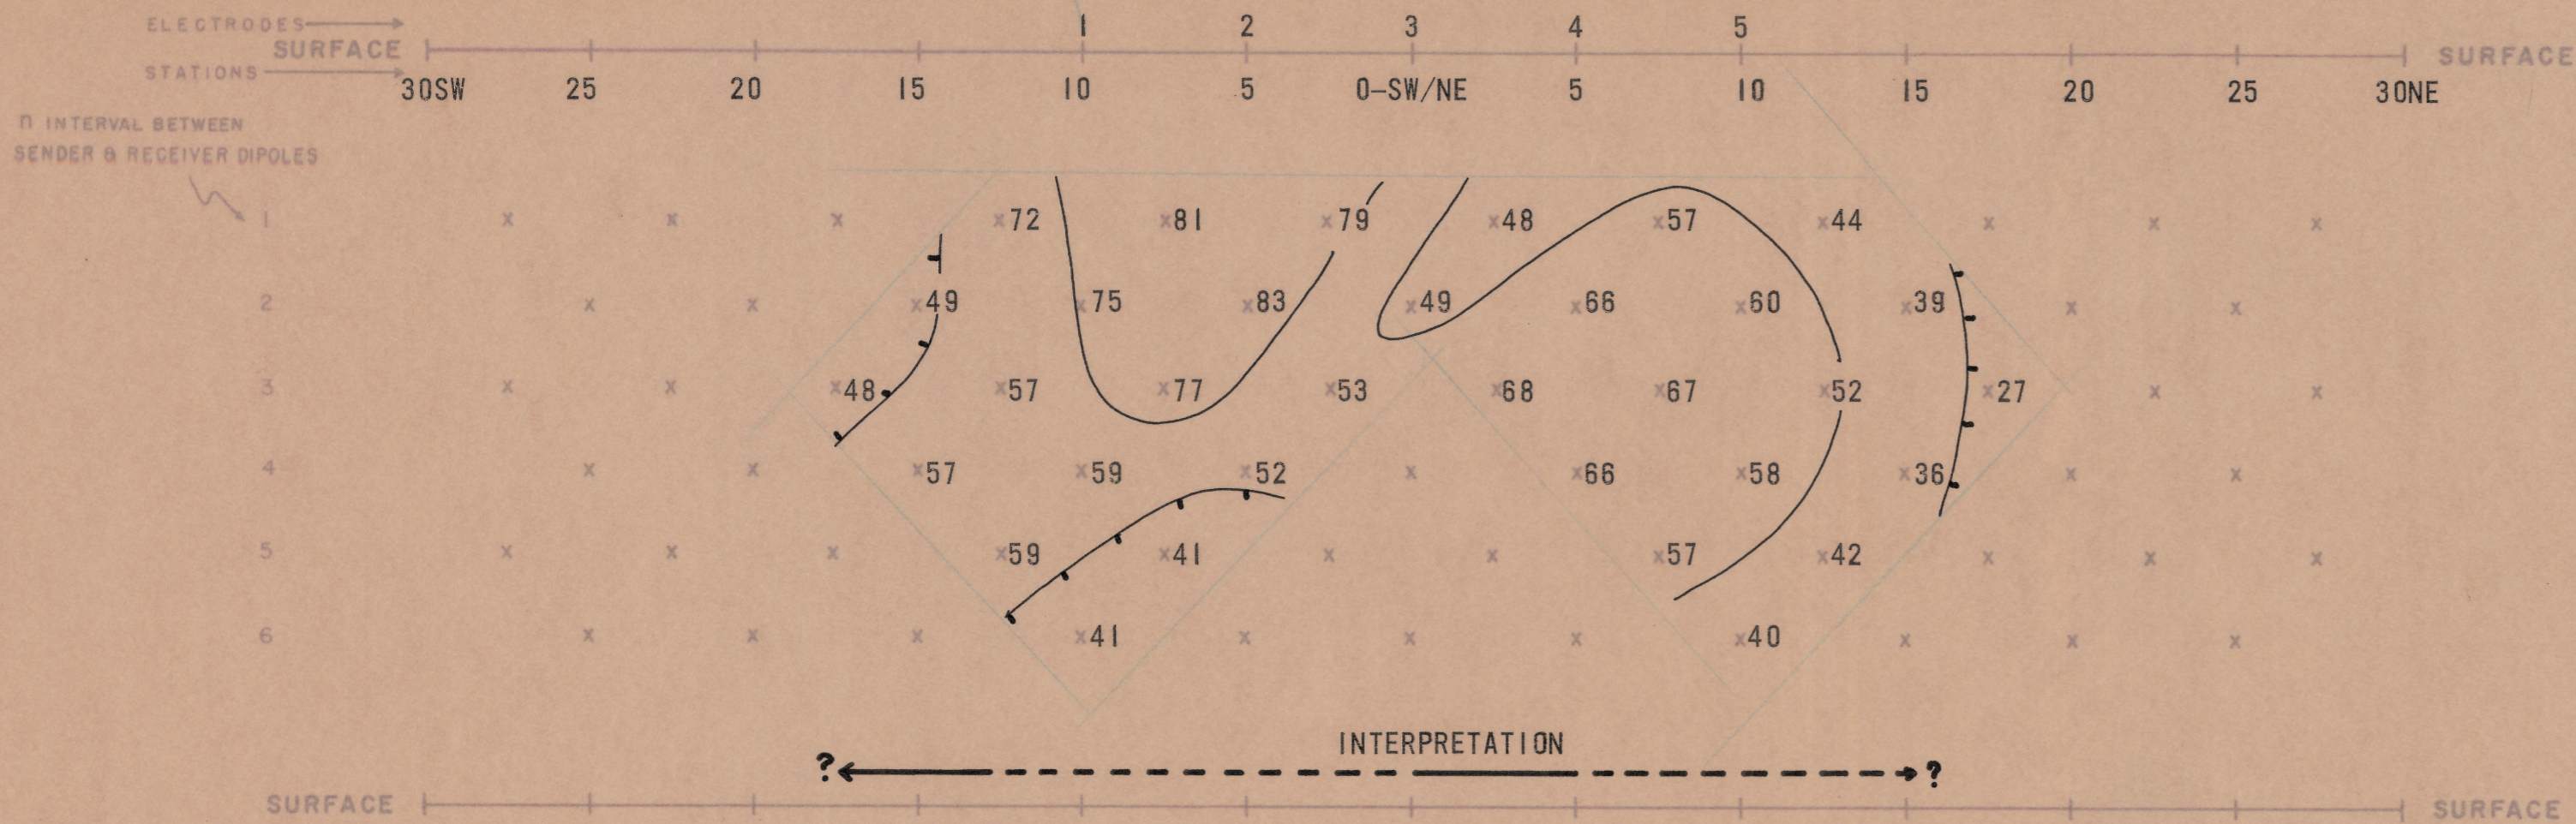


APPARENT RESISTIVITY (ρ_a)
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 cps.

EXPLANATION

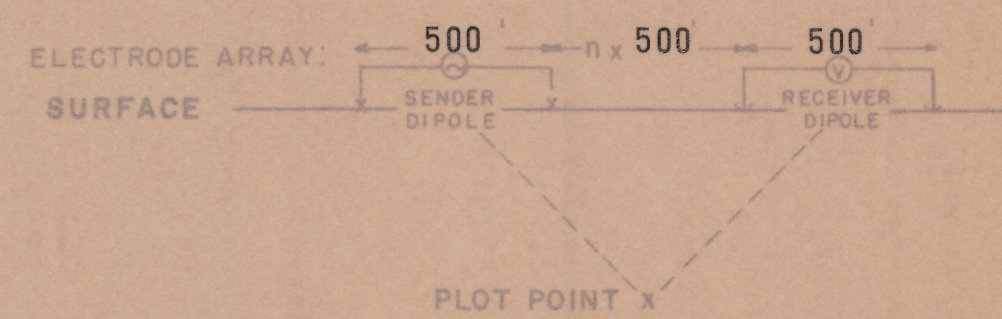

RELATIVE ANOMALY STRENGTH

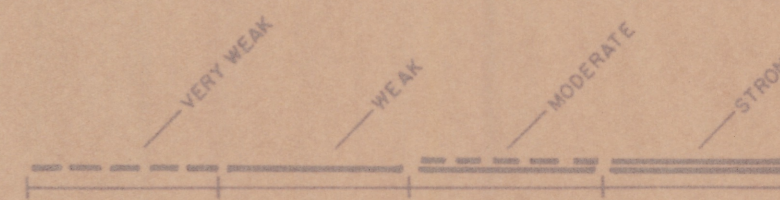

LOOKING N 60° W

RIPSEY AREA

SECTIONAL DATA SHEET

LINE NO. 1 (SPREAD 1)

INDUCED POLARIZATION TRAVERSE


HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 500' DATE: MAY 1968


FOR

MR RUSSELL BADGETT JR.

INTERPRETATION

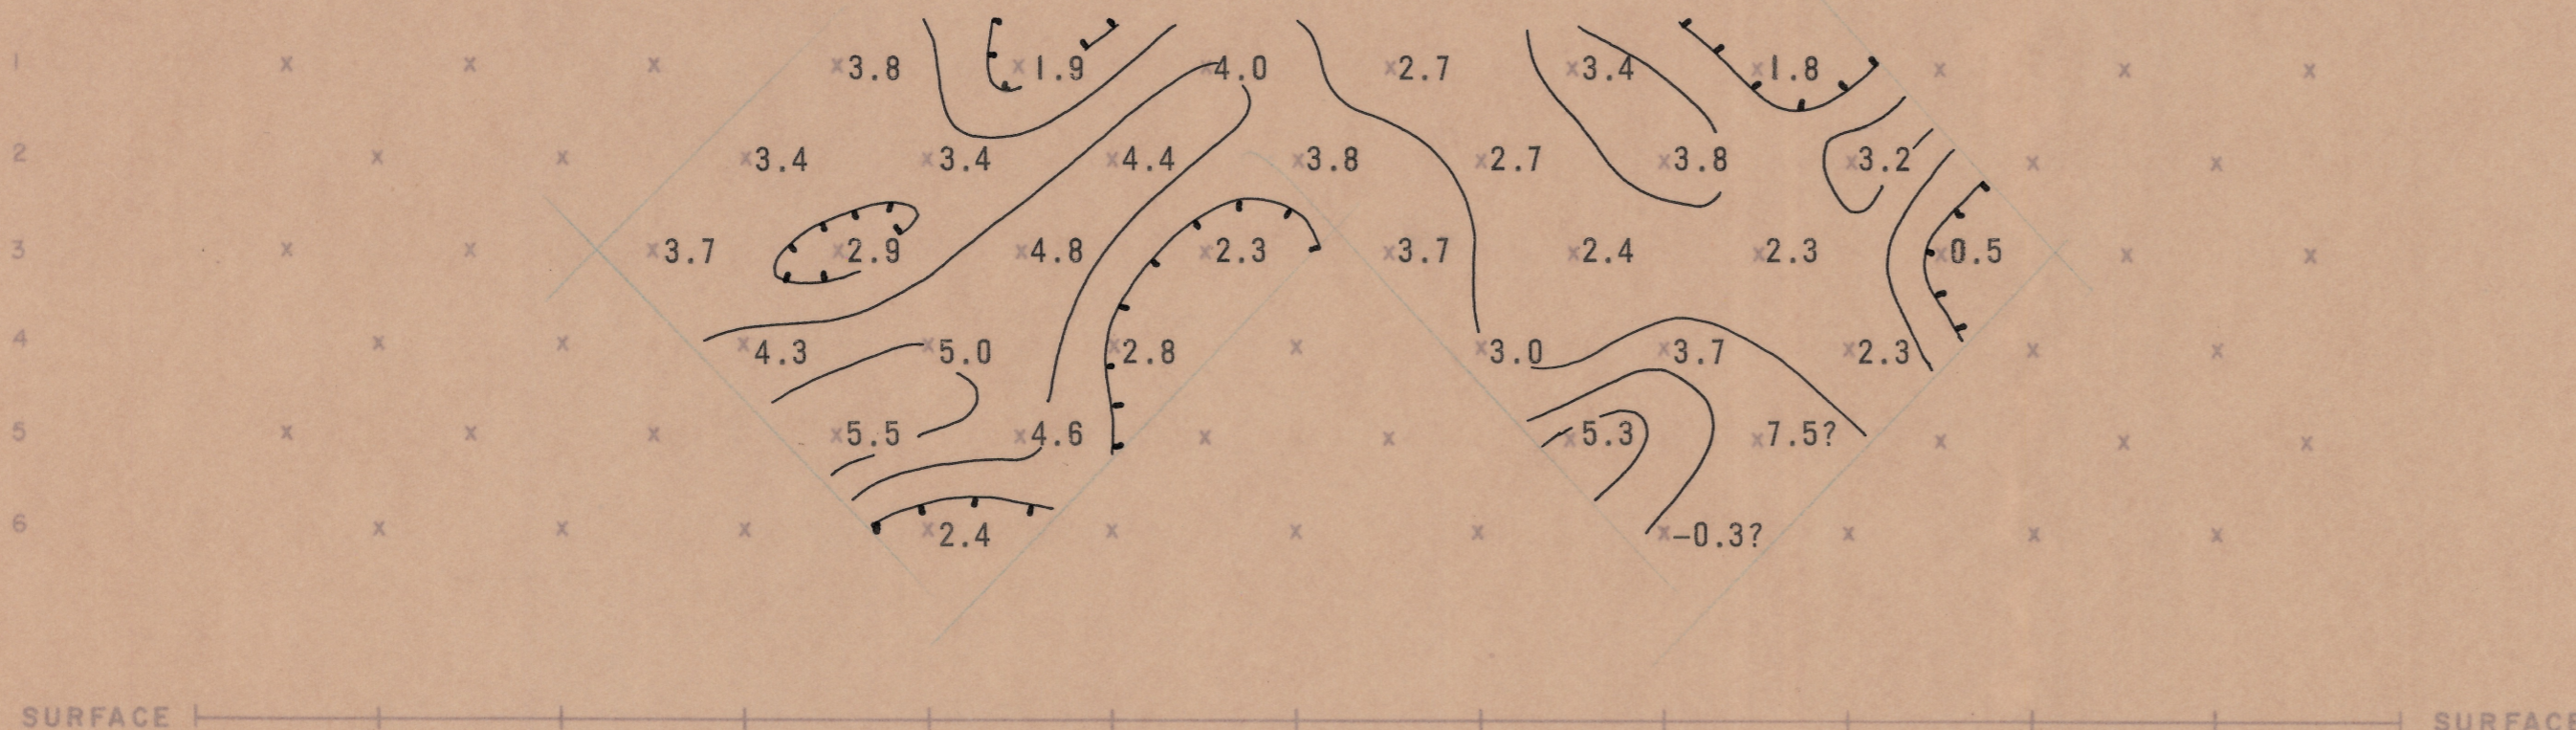

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 cps.

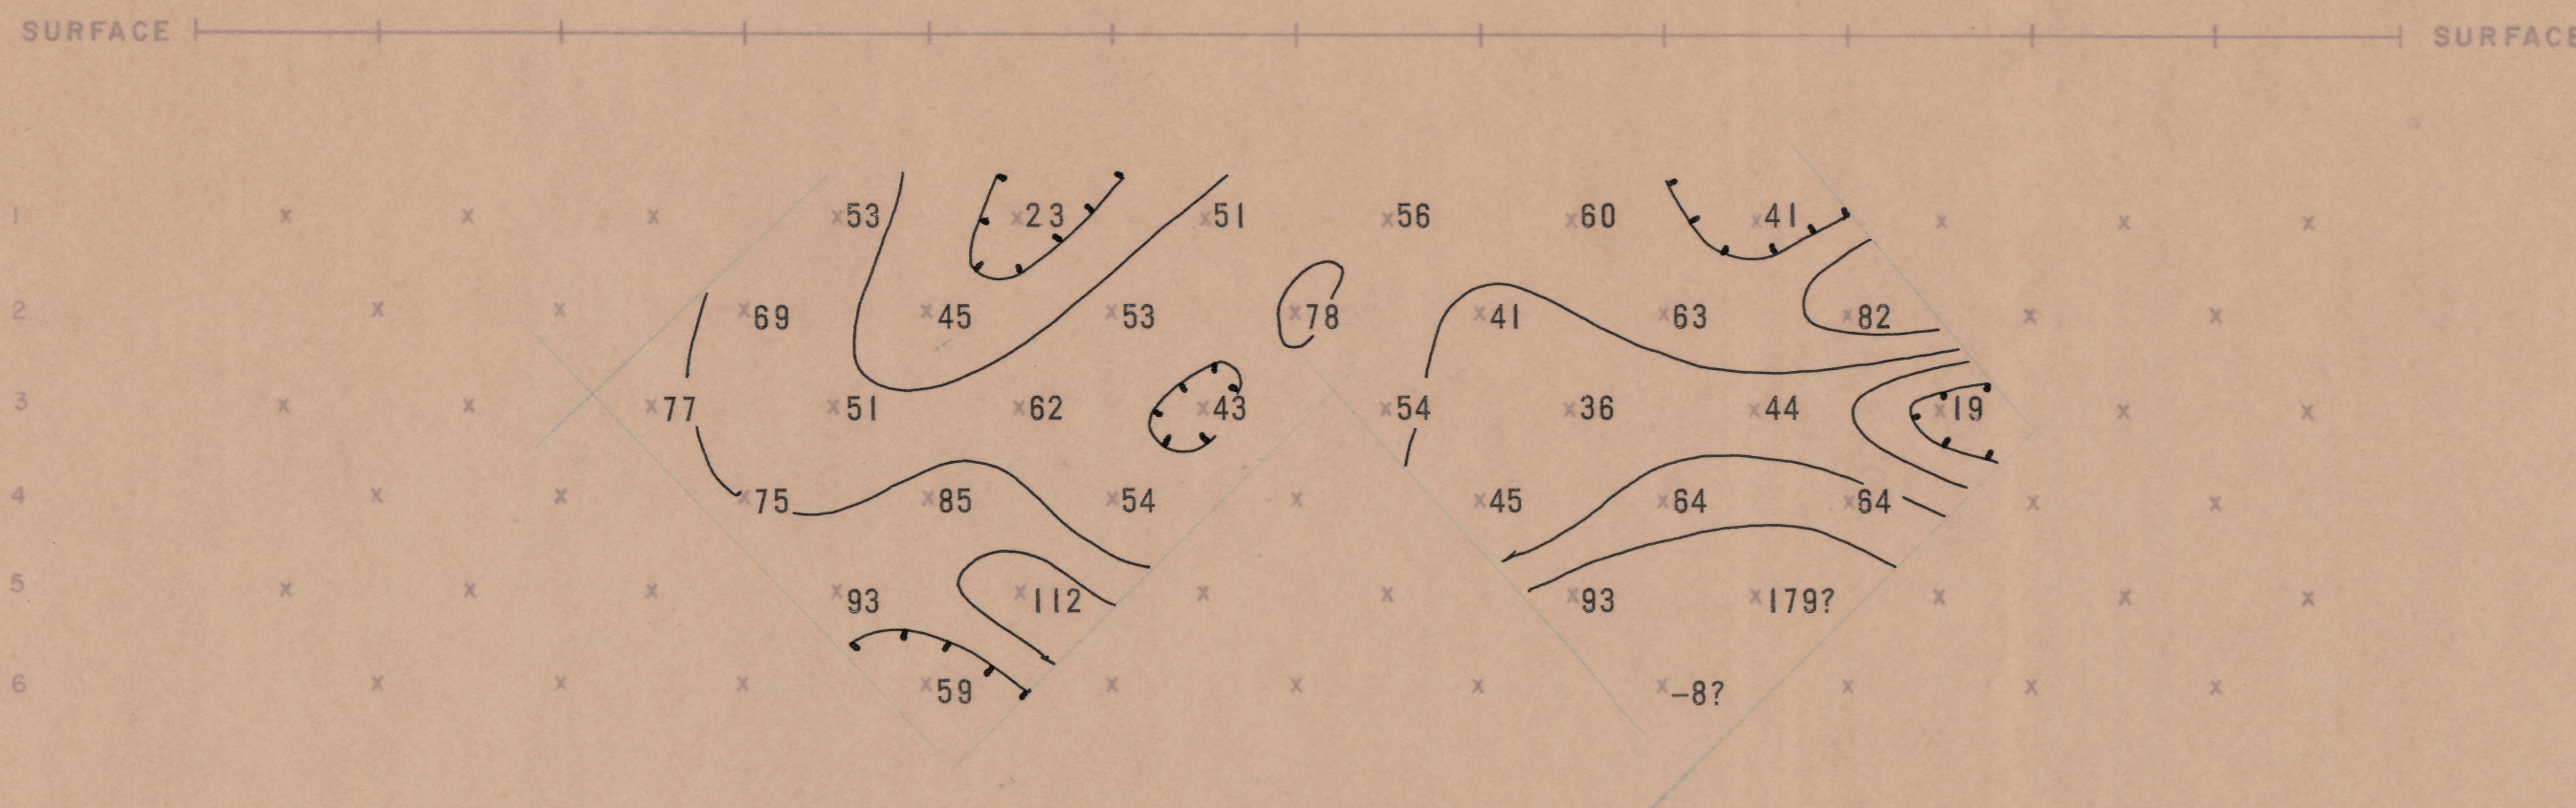

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
($MCF = \frac{PFE \times 1000}{\rho_a}$)
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

