

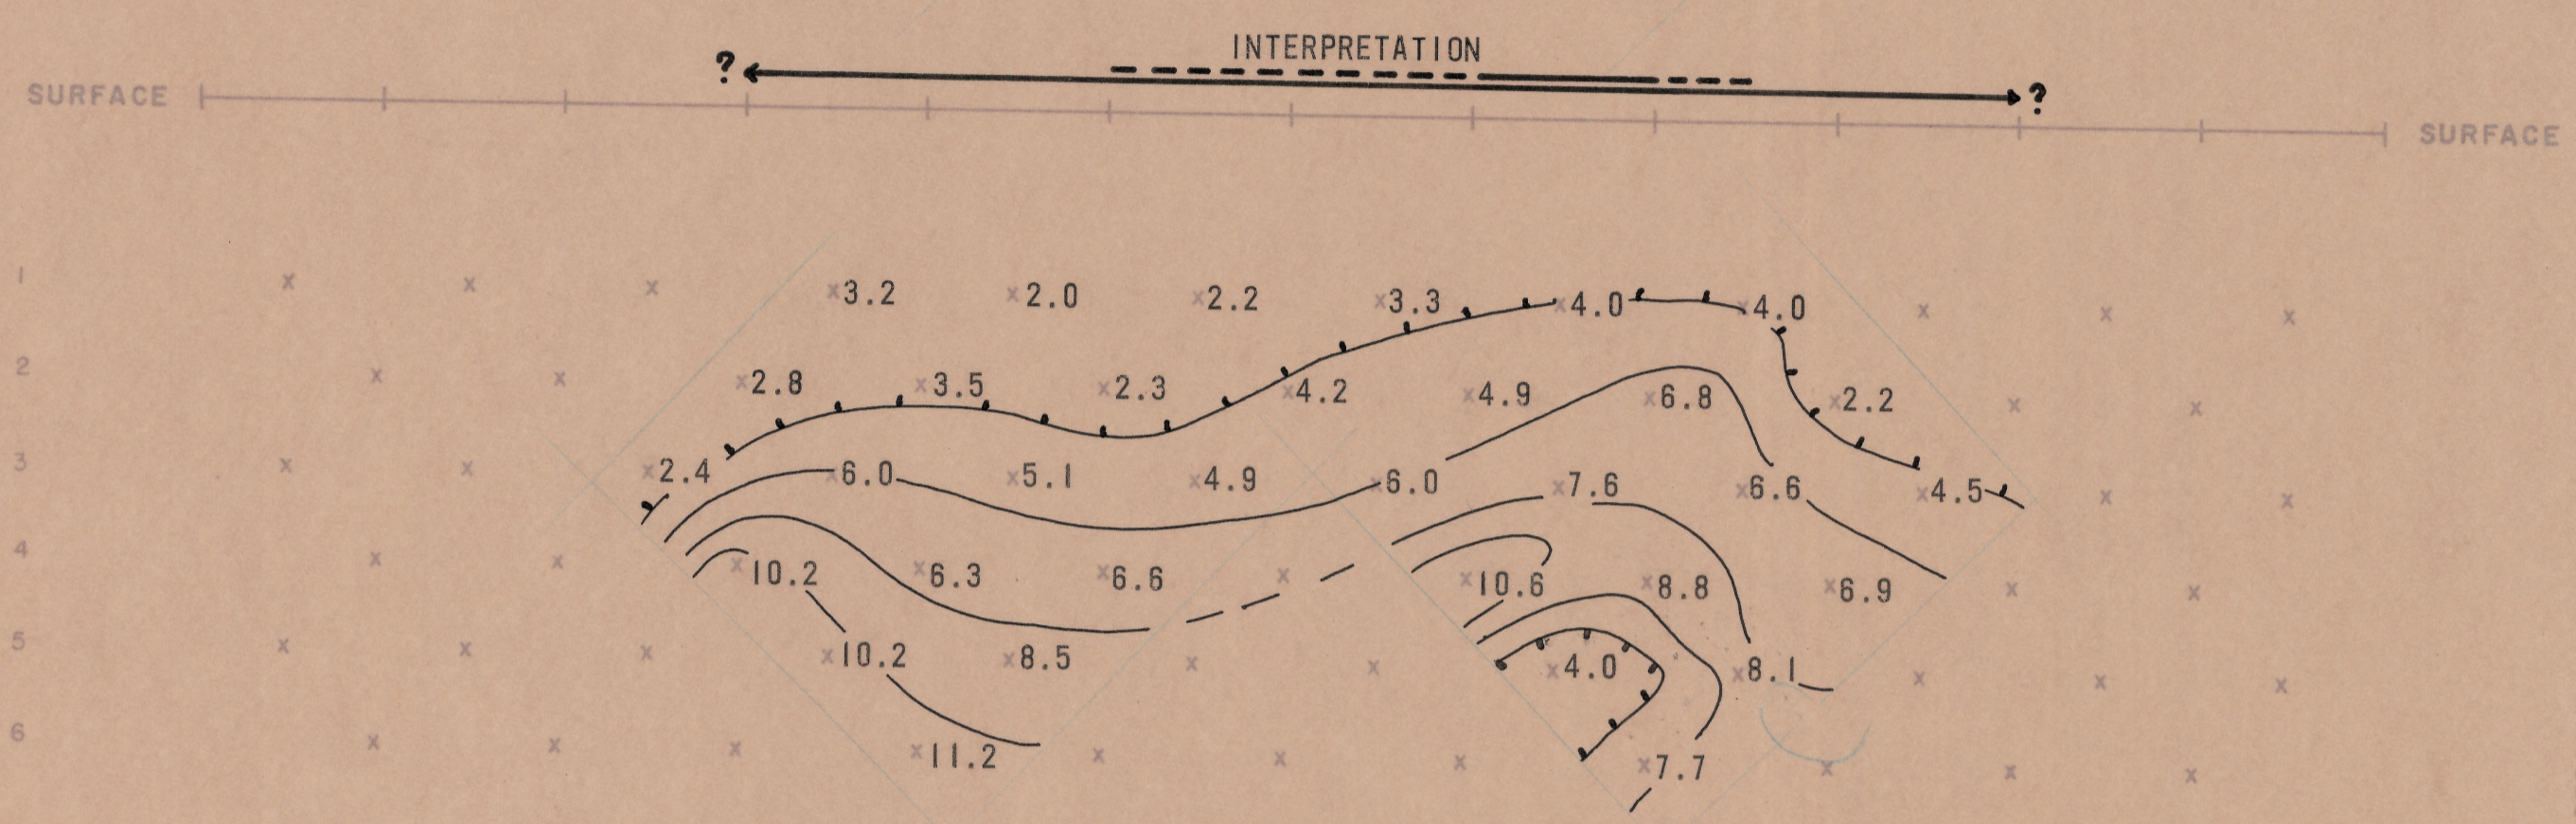


APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET 2M
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 C.P.S.

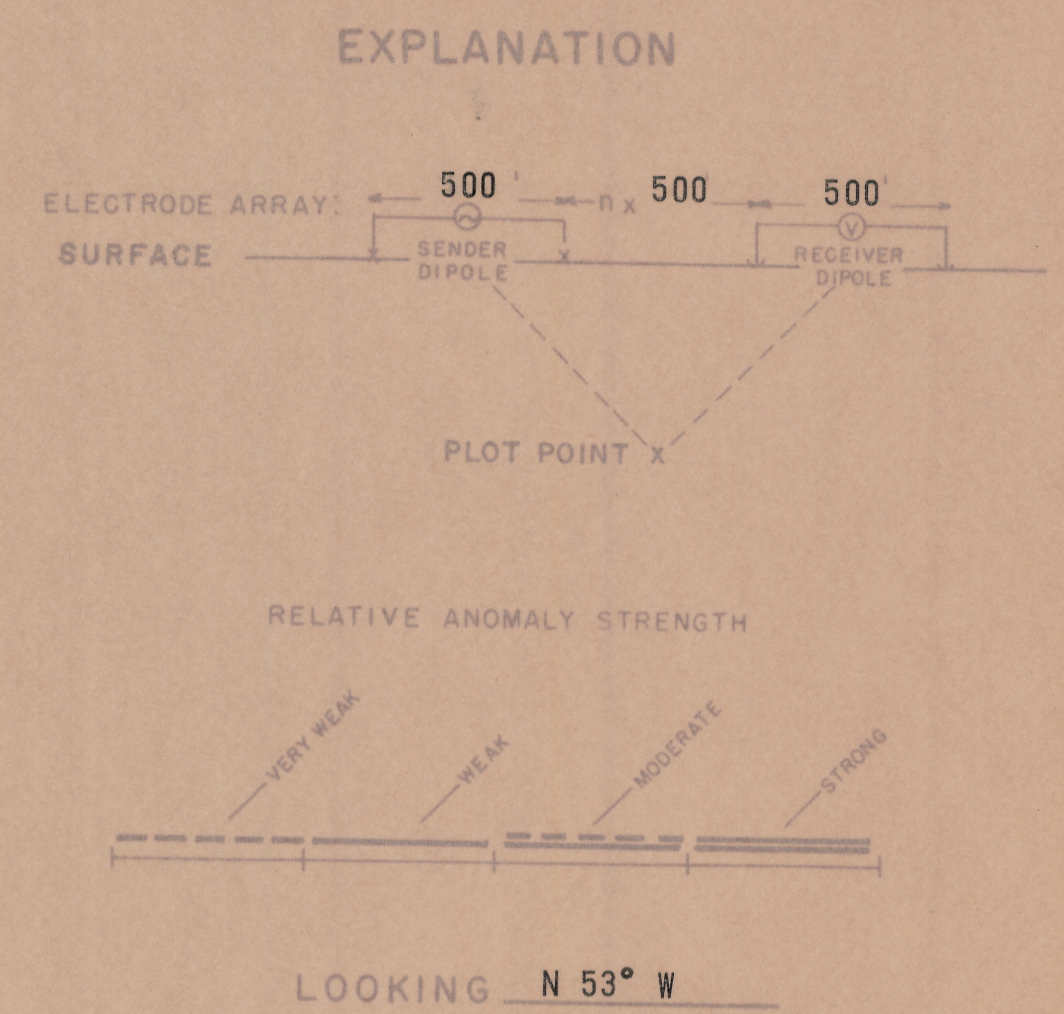


PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 3.0 C.P.S.

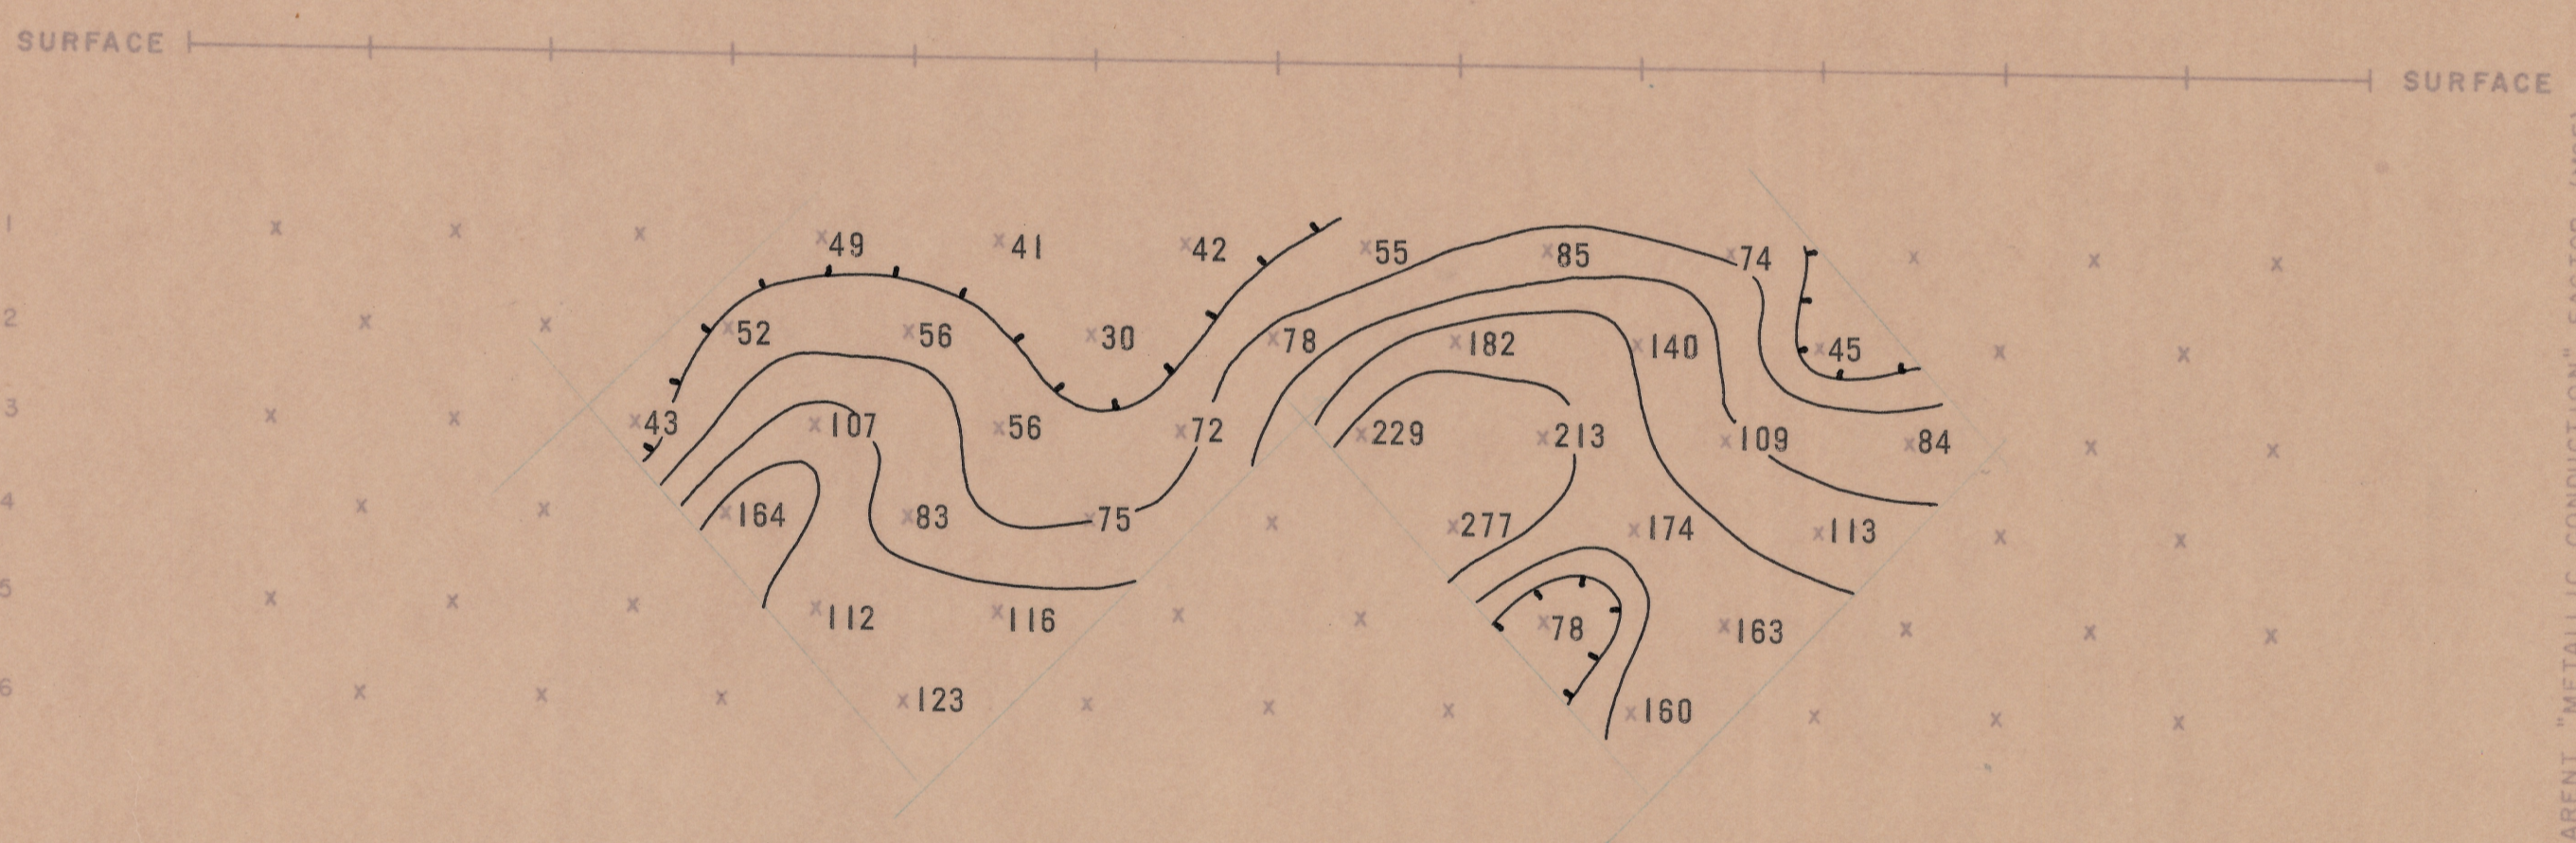

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 (MCF = $\frac{PFE \times 1000}{\rho_{DC} \times 2IT}$)
 CONTOUR INTERVAL LOGARITHMIC

RIPSEY AREA
 SECTIONAL DATA SHEET
 LINE NO. 2 (SPREAD 1)
 INDUCED POLARIZATION TRAVERSE
 HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 500' DATE: JUL 1968
 FOR
 MR RUSSELL BADGETT JR.

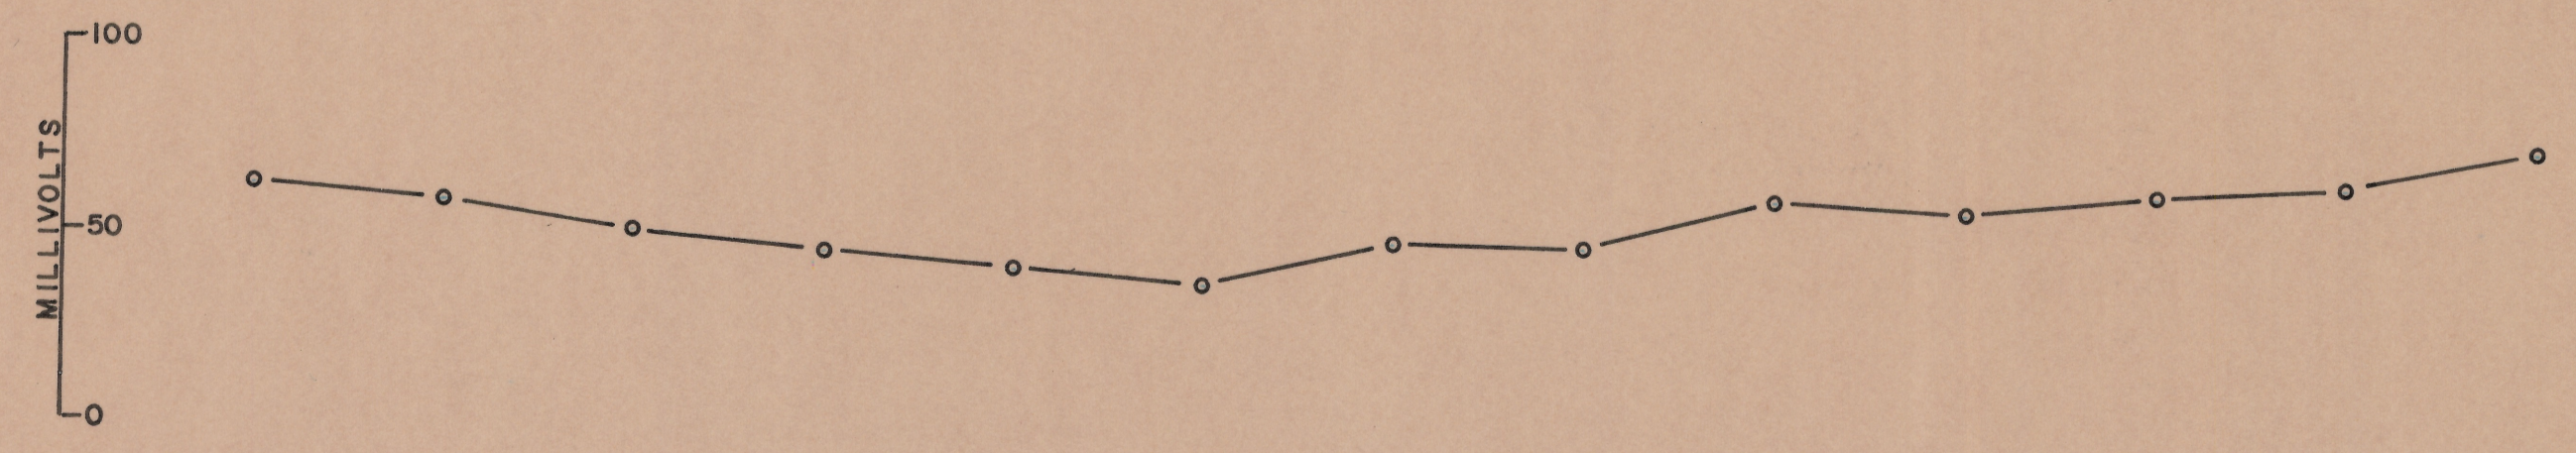

SELF POTENTIAL