

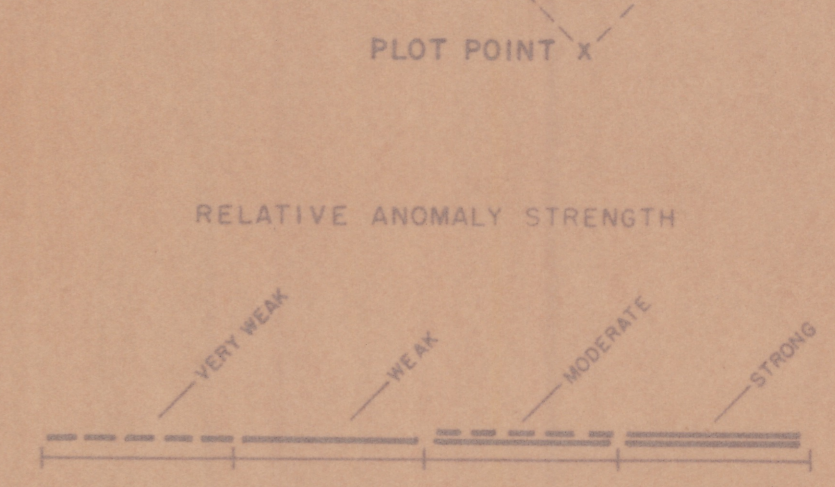


APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET $\frac{1}{2\pi}$
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 cps.


EXPLANATION

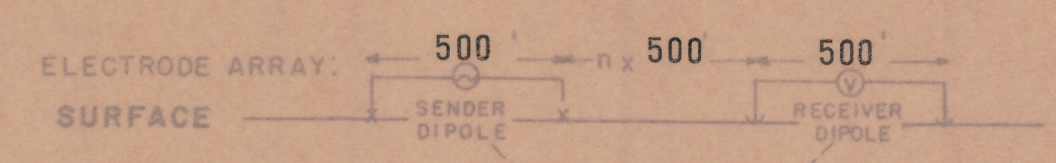

LOOKING N 35° E

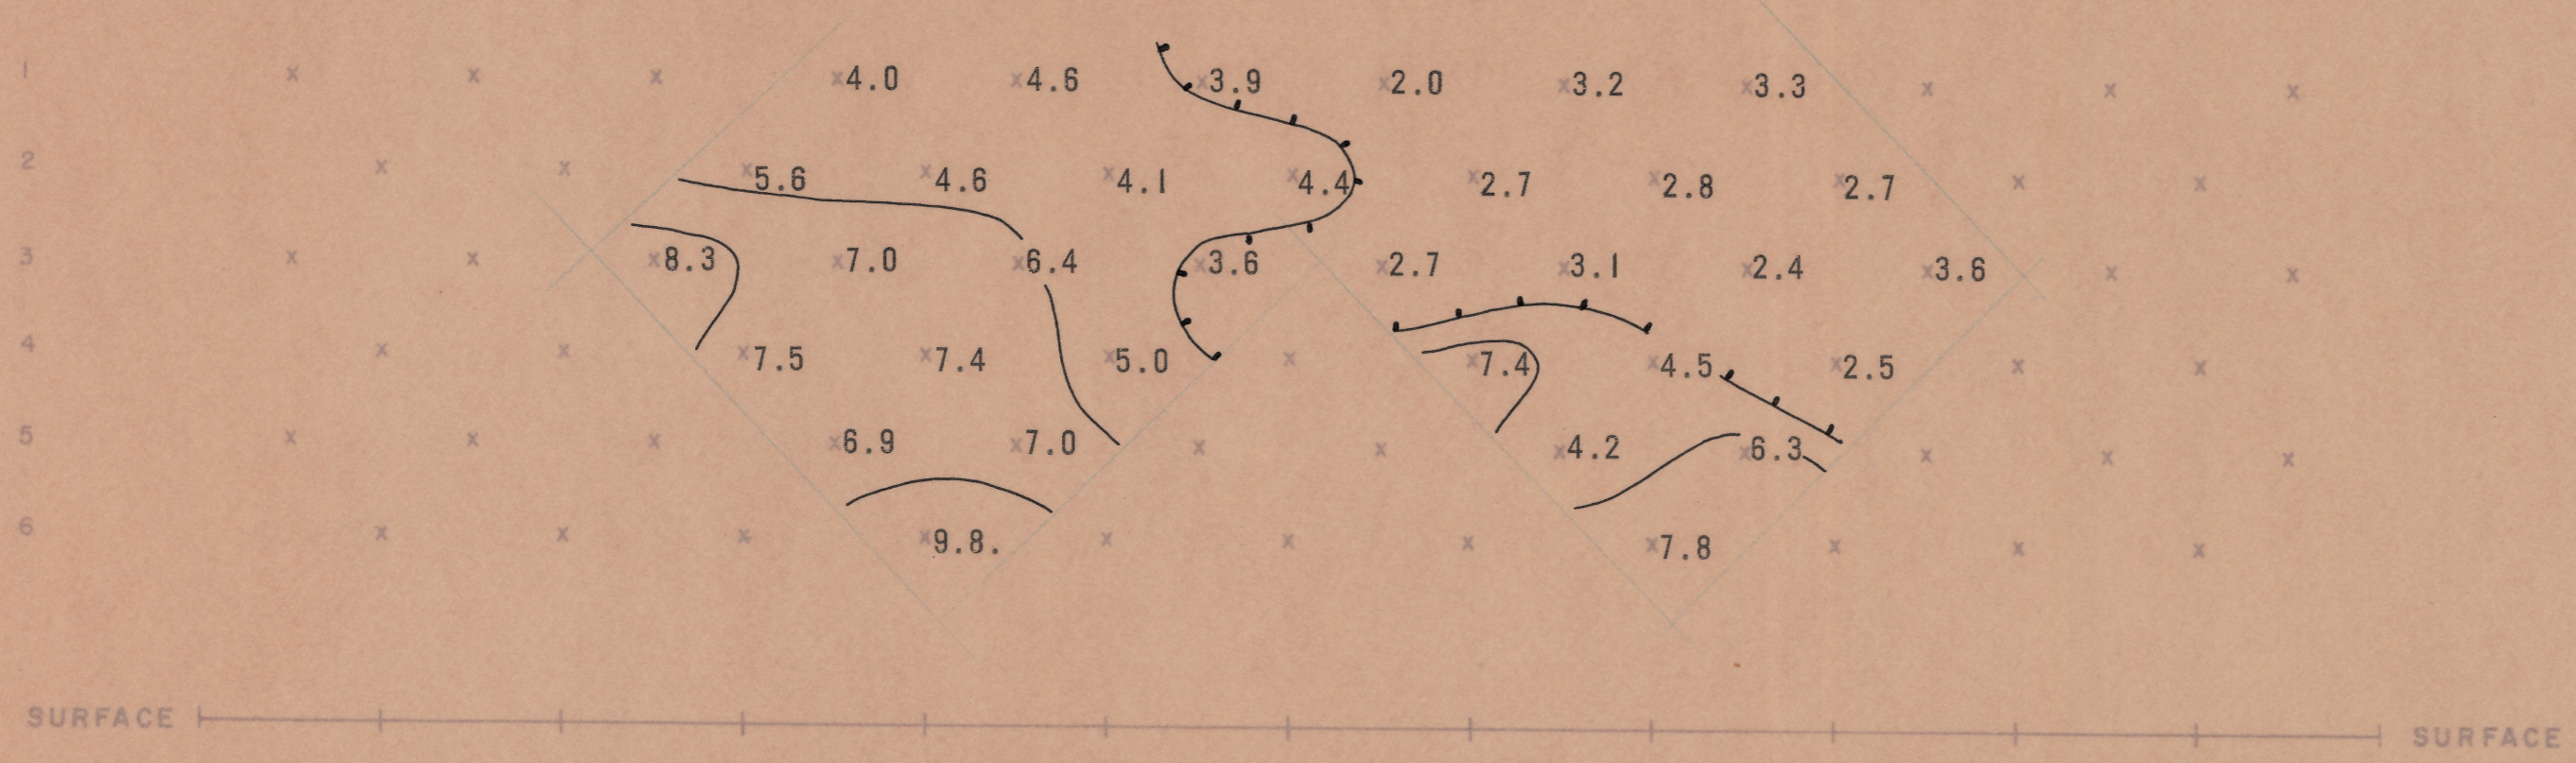

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 cps.

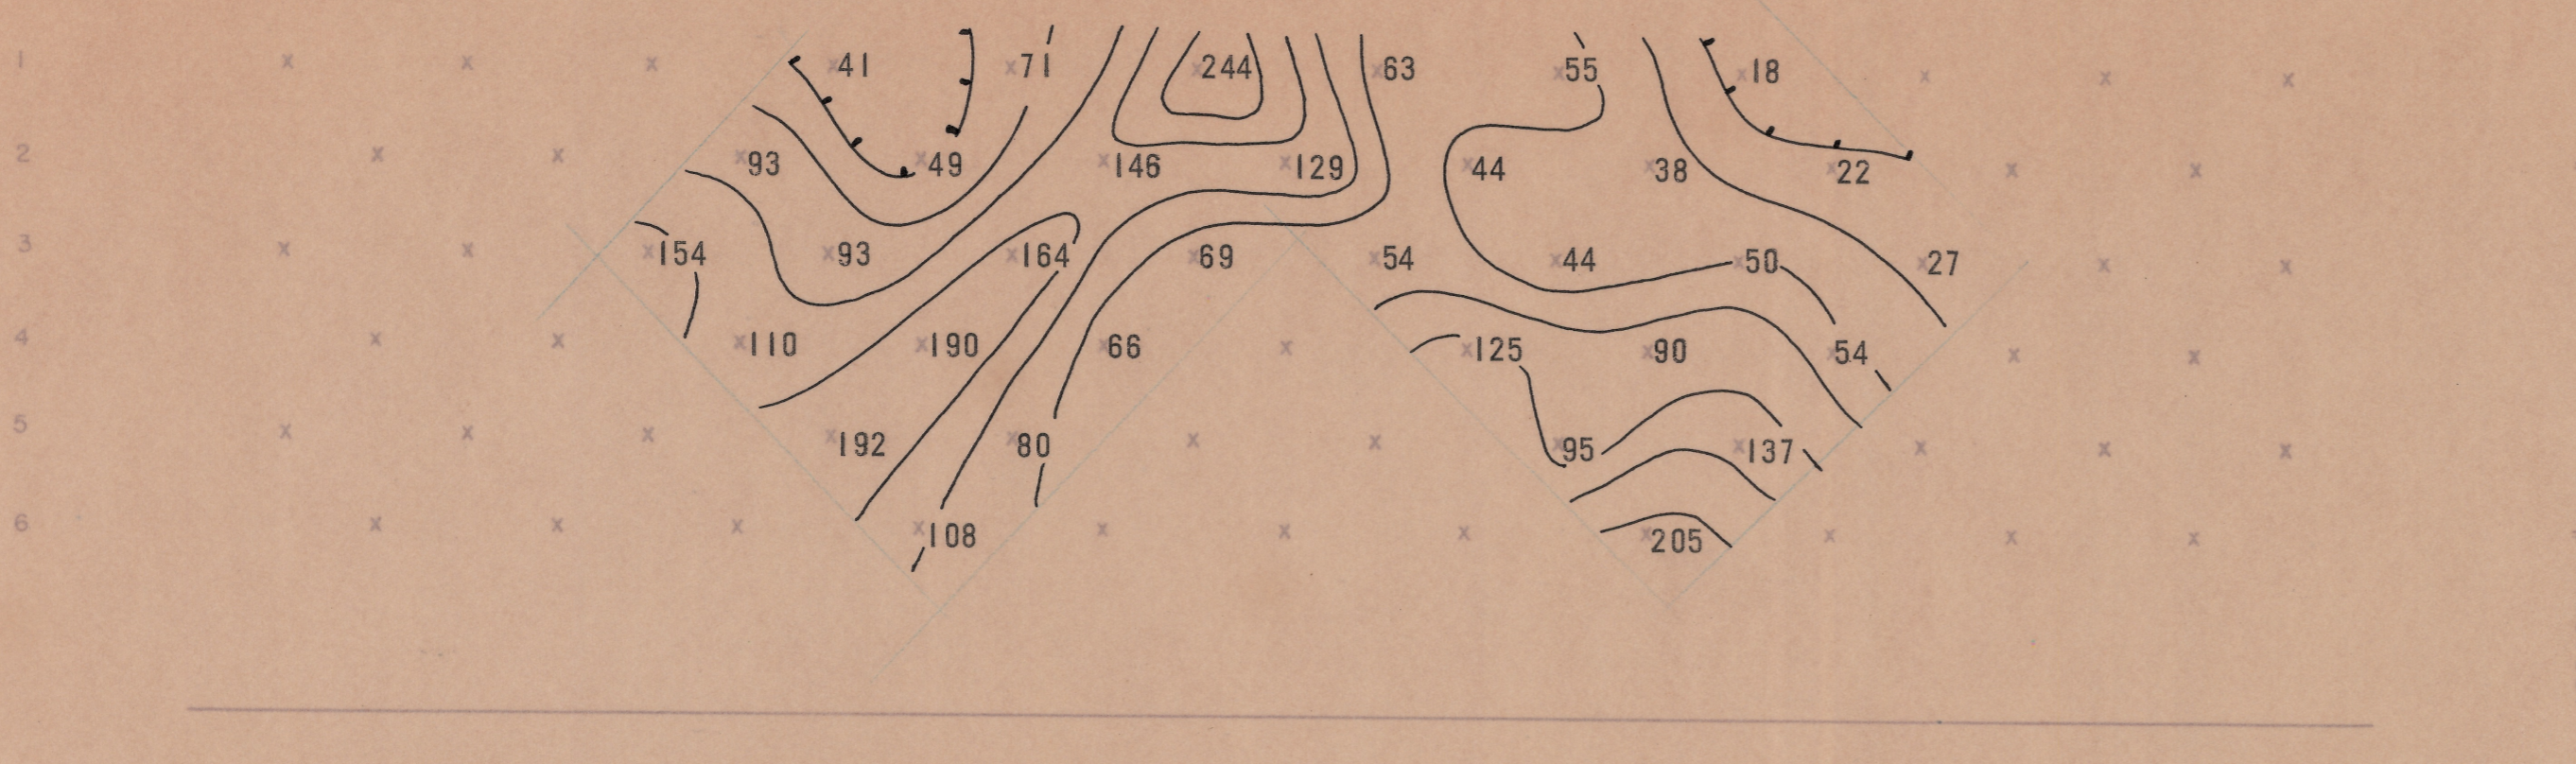

APPARENT "METALLIC/CONDUCTION" FACTOR (MCF)
(MCF = $\frac{PFE \times 1000}{\rho_{DC} \frac{1}{2\pi}}$)
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

RIPSEY AREA
SECTIONAL DATA SHEET
LINE NO. 3 (SPREAD 1)
INDUCED POLARIZATION TRAVERSE
HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 500' DATE: MAY 1968
FOR
MR RUSSELL BADGETT JR.

