



APPARENT RESISTIVITY ( $\rho_{DC}$ )  
IN UNITS OF OHM FEET 21T  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 c.p.s.

PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
(MCF =  $\frac{\rho_{DC}}{PFE \times 1000}$ )  
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

EXPLANATION

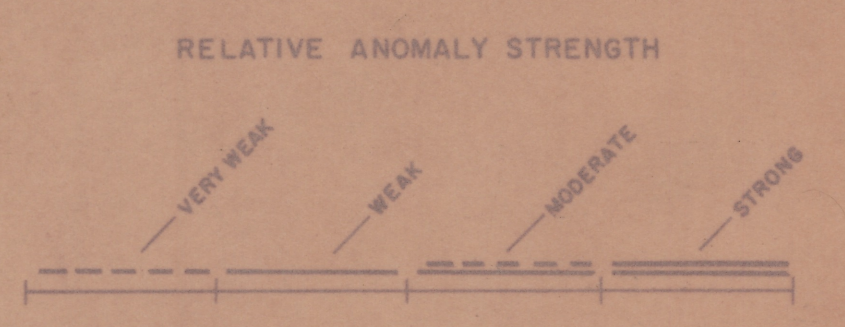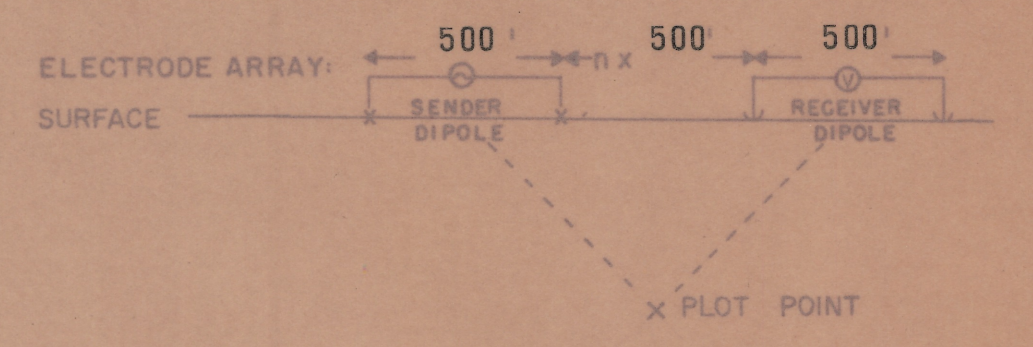

LOOKING N 35° E

RIPSEY AREA  
SECTIONAL DATA SHEET  
LINE NO. 4 (SPREADS 1 & 2)  
INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY  
SCALE: 1" = 500' DATE: MAY 1968  
JUL 1968

FOR  
MR RUSSELL BADGETT JR.