


ELECTRODES SURFACE
STATIONS 60W 50 40 30 20 10 0-W/E 10 20 30 40 50 60E SURFACE

□ INTERVAL BETWEEN
SENDER & RECEIVER DIPOLES




APPARENT RESISTIVITY (ρ_a)
IN UNITS OF OHM FEET FT
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

EXPLANATION

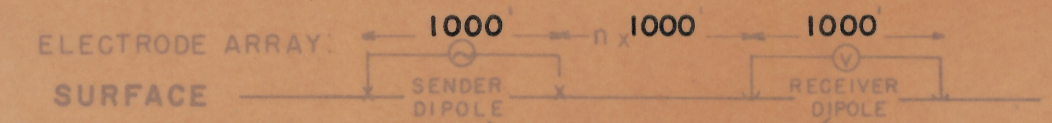


PLOT POINT X

RELATIVE ANOMALY STRENGTH

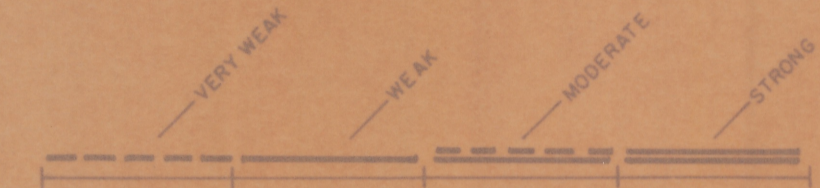


LOOKING NORTHERLY

SURFACE SURFACE

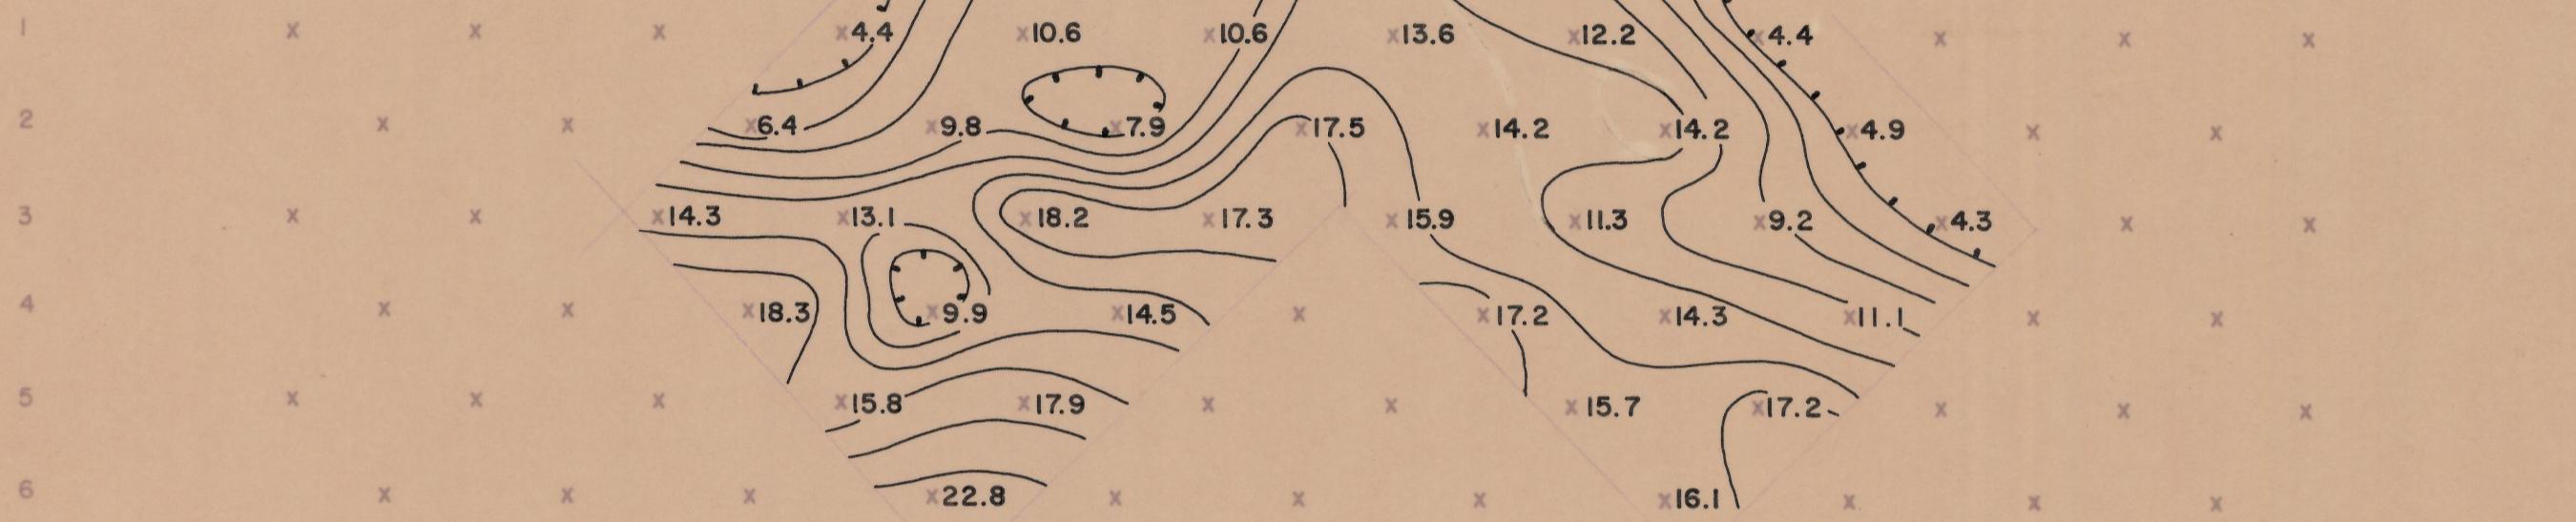

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 1.0 c.p.s.

SURFACE SURFACE

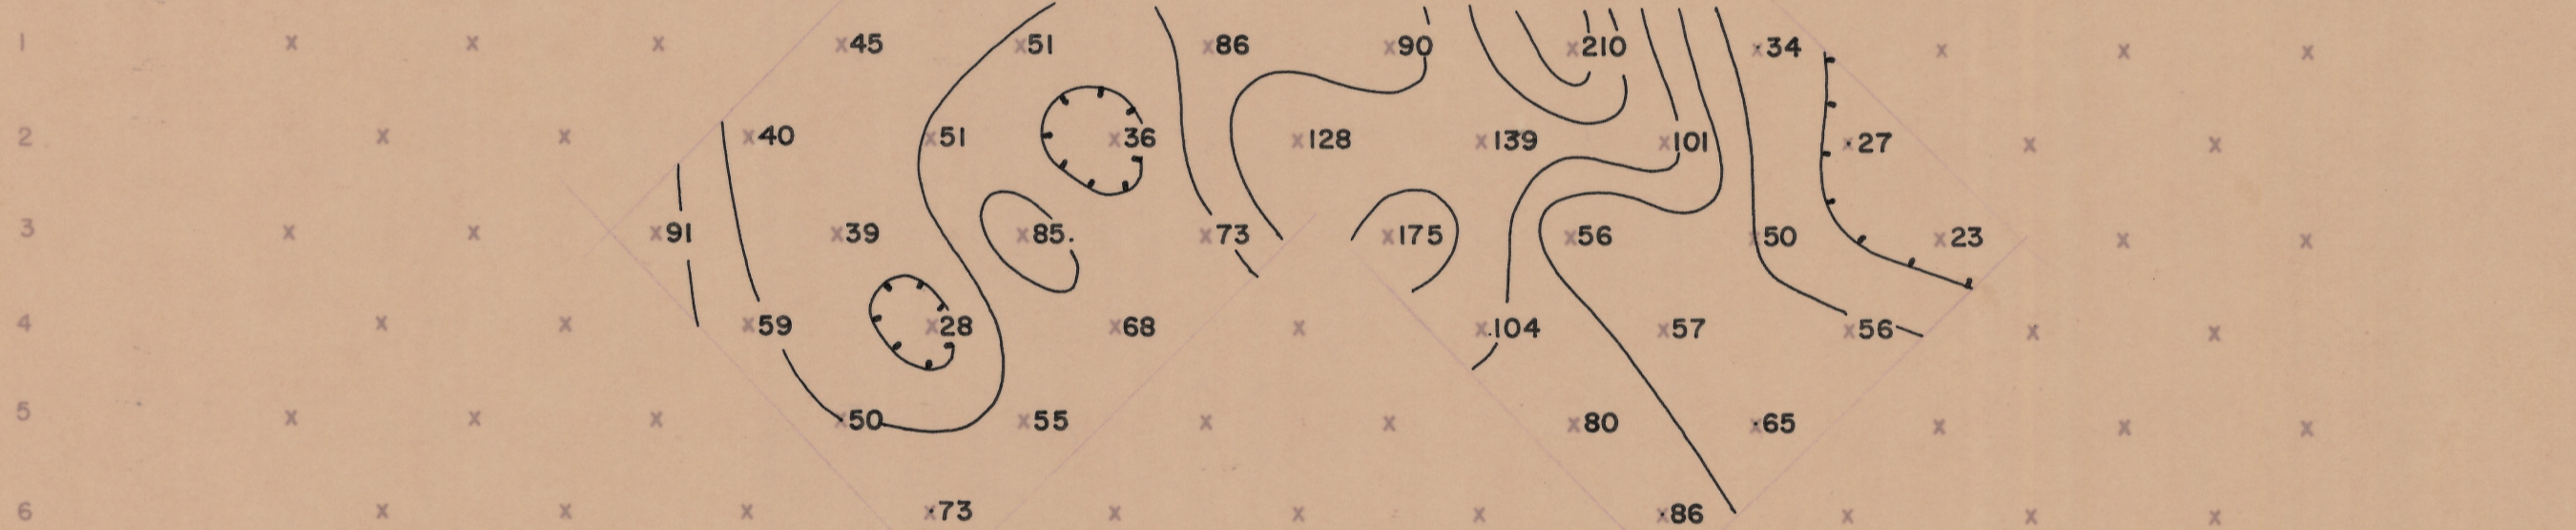

APPARENT "METALLIC CONDUCTION" FACTOR (MGF)
(MGF = $\frac{PFE \times 1000}{\rho_a}$)
CONTOUR INTERVAL LOGARITHMIC

SALOME AREA

SECTIONAL DATA SHEET

LINE NO. 2

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000'

DATE: DEC. 1966

FOR

MR. OLIVER KILROY

-60 -65 -54 -51 -22 -12 0 -11 -12 -7 -10 -3 -4

SELF POTENTIAL

