



ELECTRODE STATIONS SURFACE
 60W 50 40 30 20 10 0 - W / E 10 20E SURFACE

n INTERVAL BETWEEN SENDER & RECEIVER DIPOLES

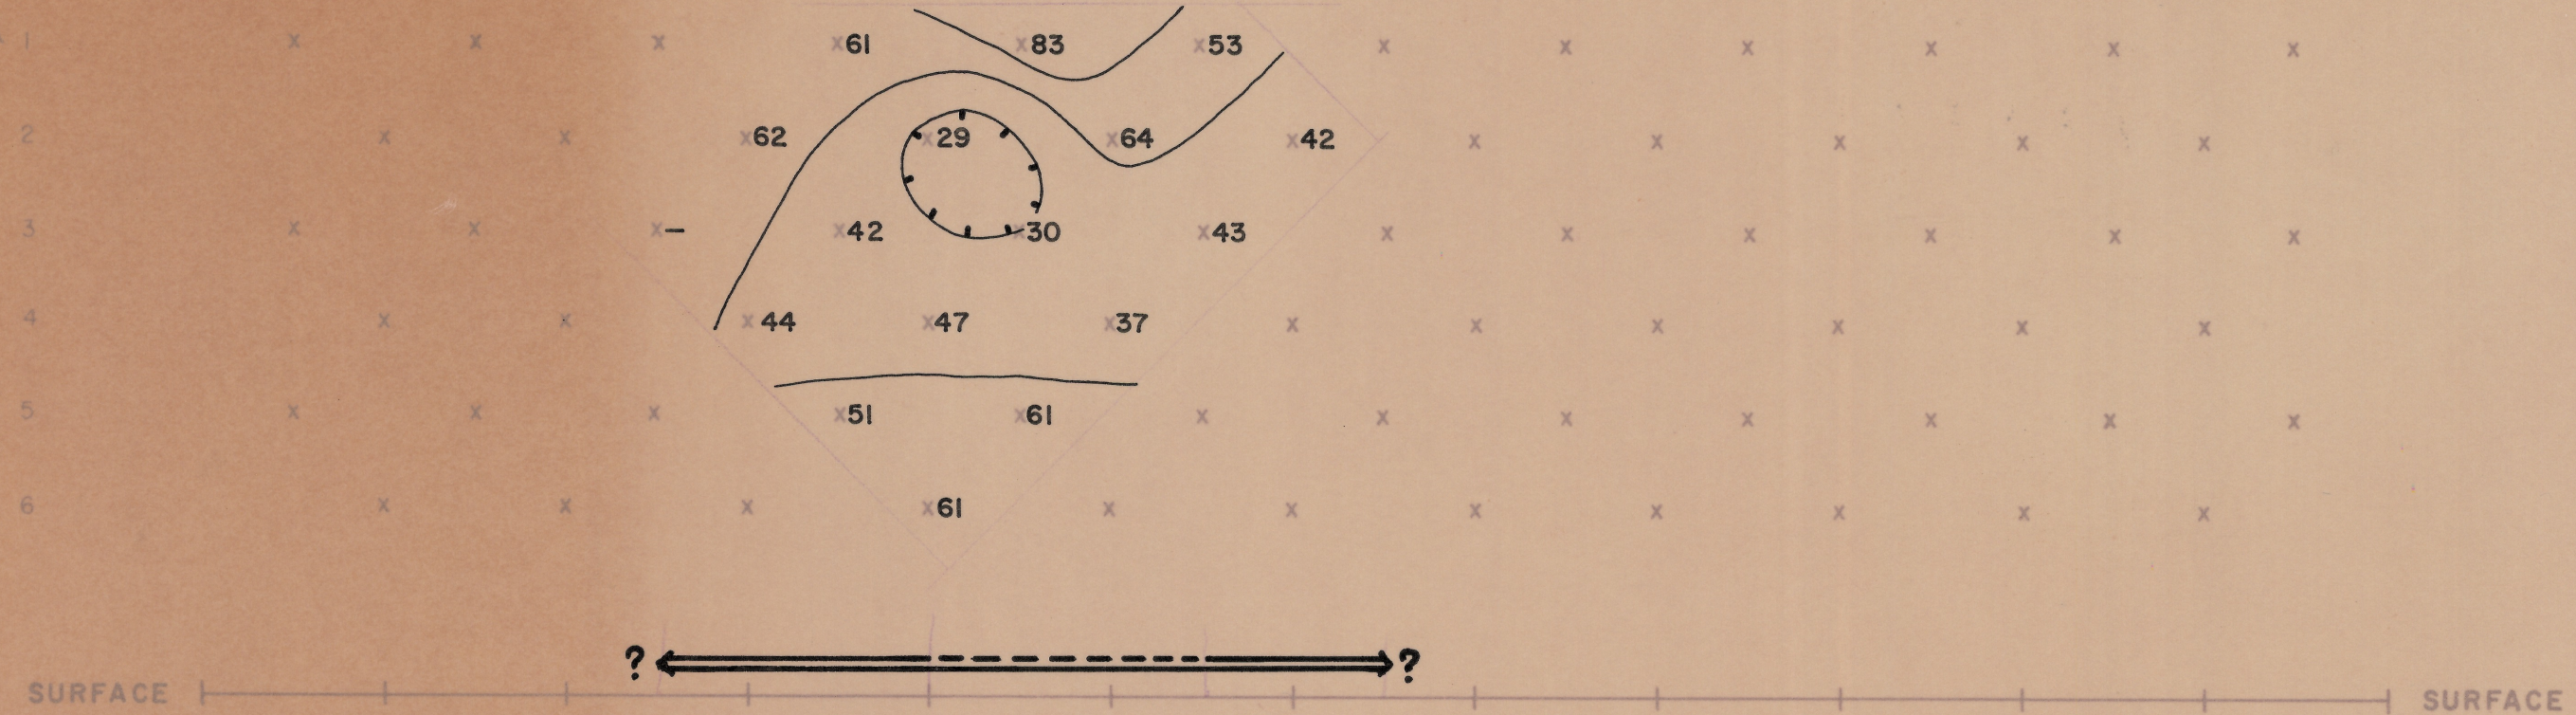


APPARENT RESISTIVITY (ρ_{DC})
 IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 C.P.S.

EXPLANATION

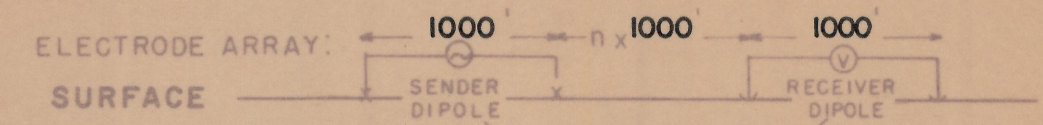


PLOT POINT X


RELATIVE ANOMALY STRENGTH

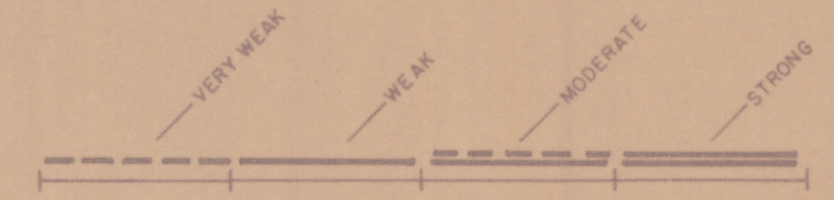

LOOKING NORTH

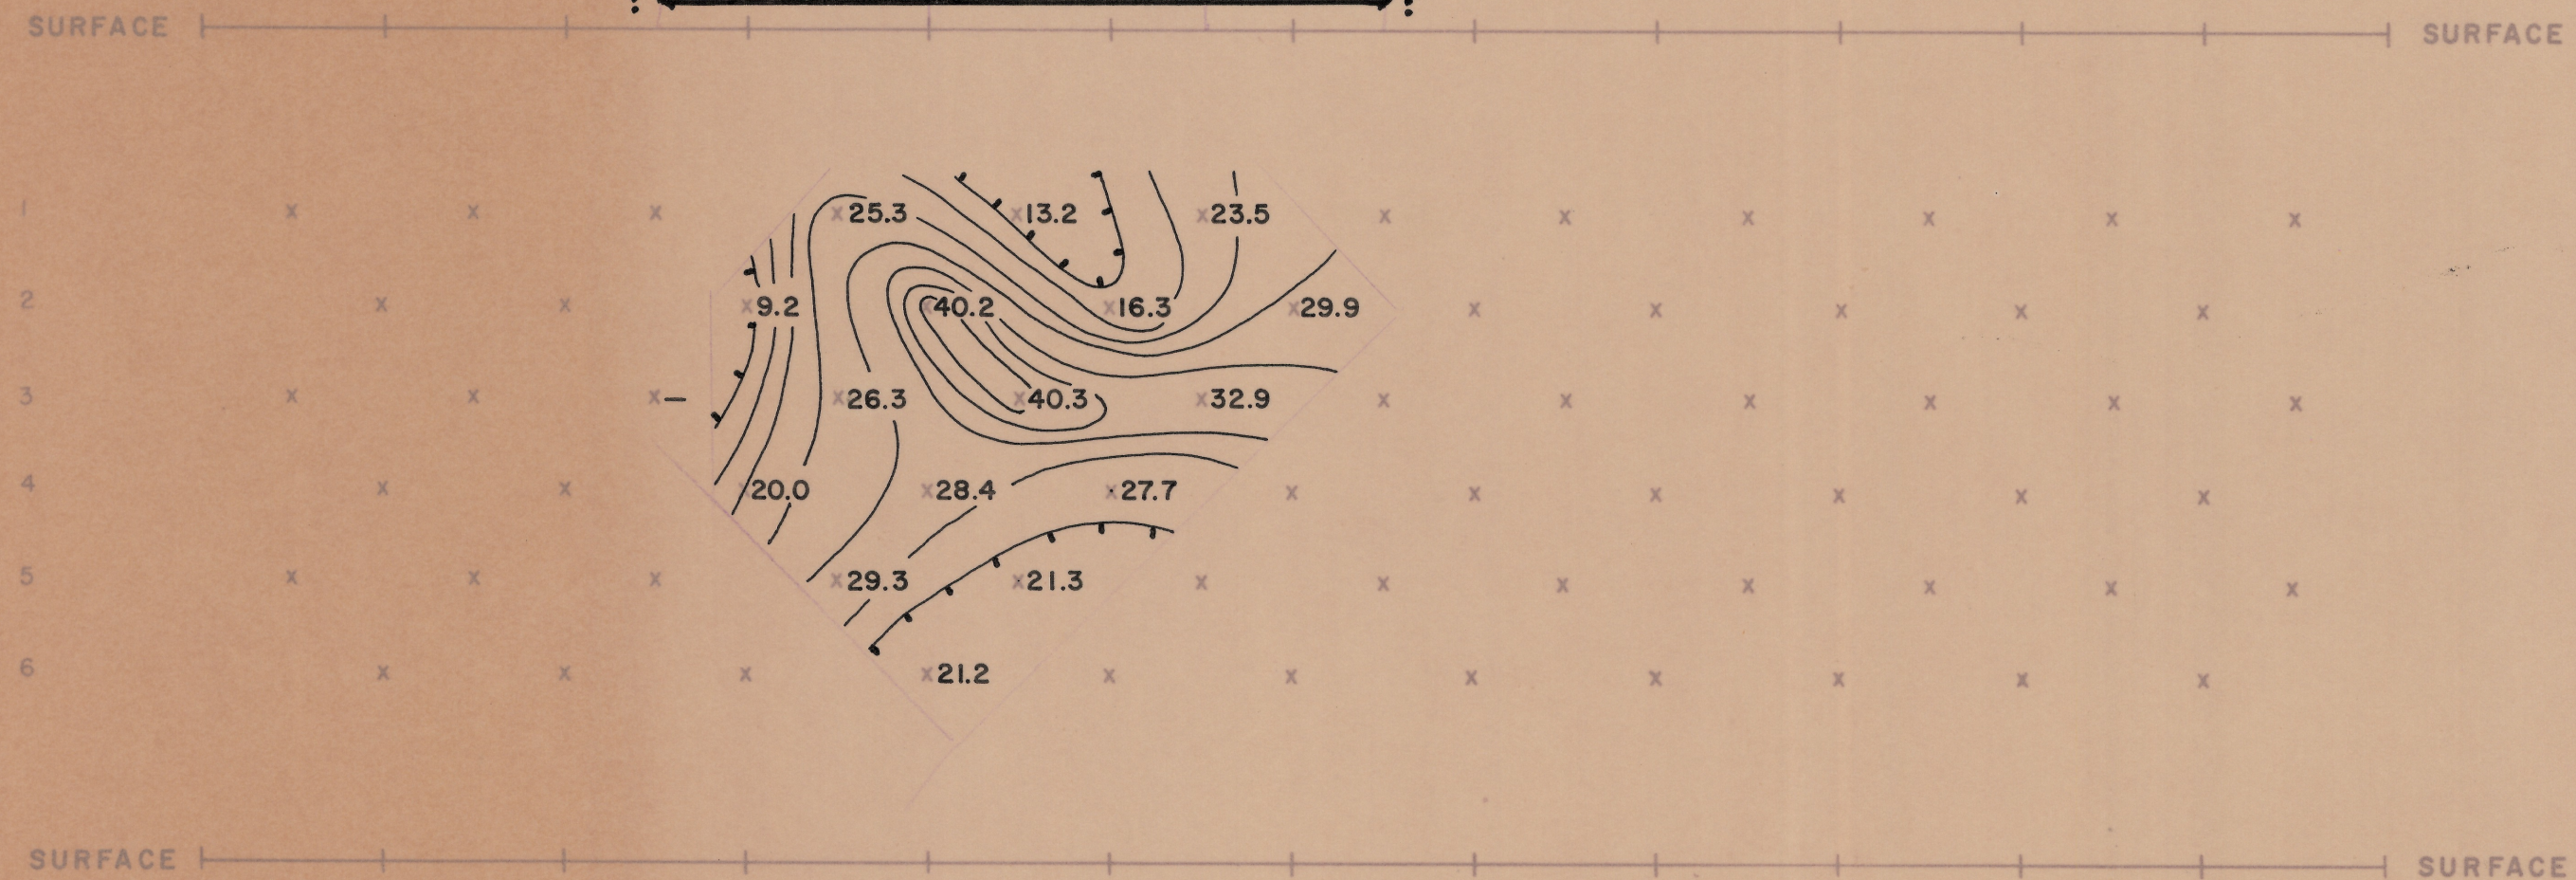

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 1.0 C.P.S.

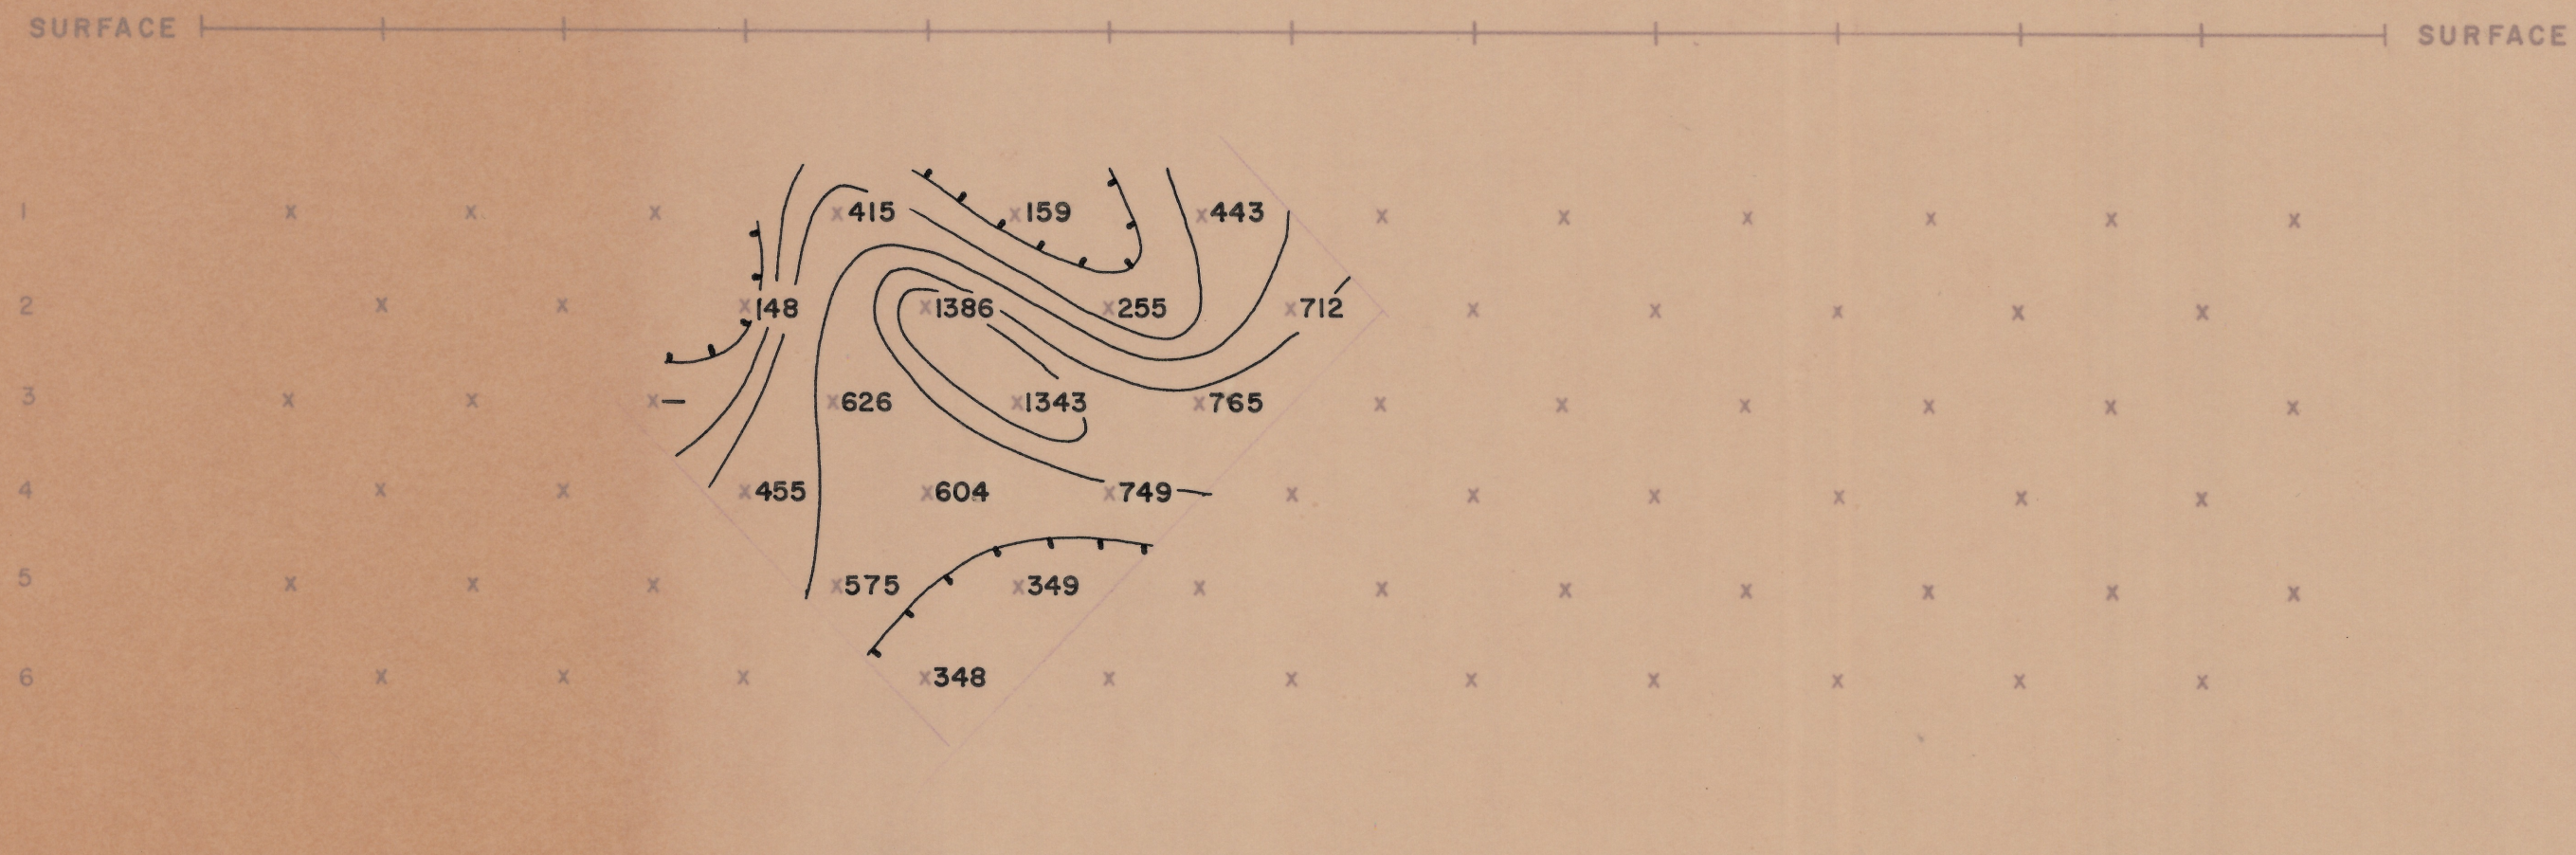

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 (MCF = $\frac{PFE \times 1000}{\rho_{DC} \times 2\pi n}$)
 CONTOUR INTERVAL LOGARITHMIC

SALOME AREA

SECTIONAL DATA SHEET

LINE NO. 4

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000'

DATE: FEB 1968

FOR
 MR. OLIVER KILROY



SELF POTENTIAL