




ELECTRODES SURFACE
STATIONS 60W 50 40 30 20 10 0-W/E 10 20E SURFACE

n INTERVAL BETWEEN
SENDER & RECEIVER DIPOLES

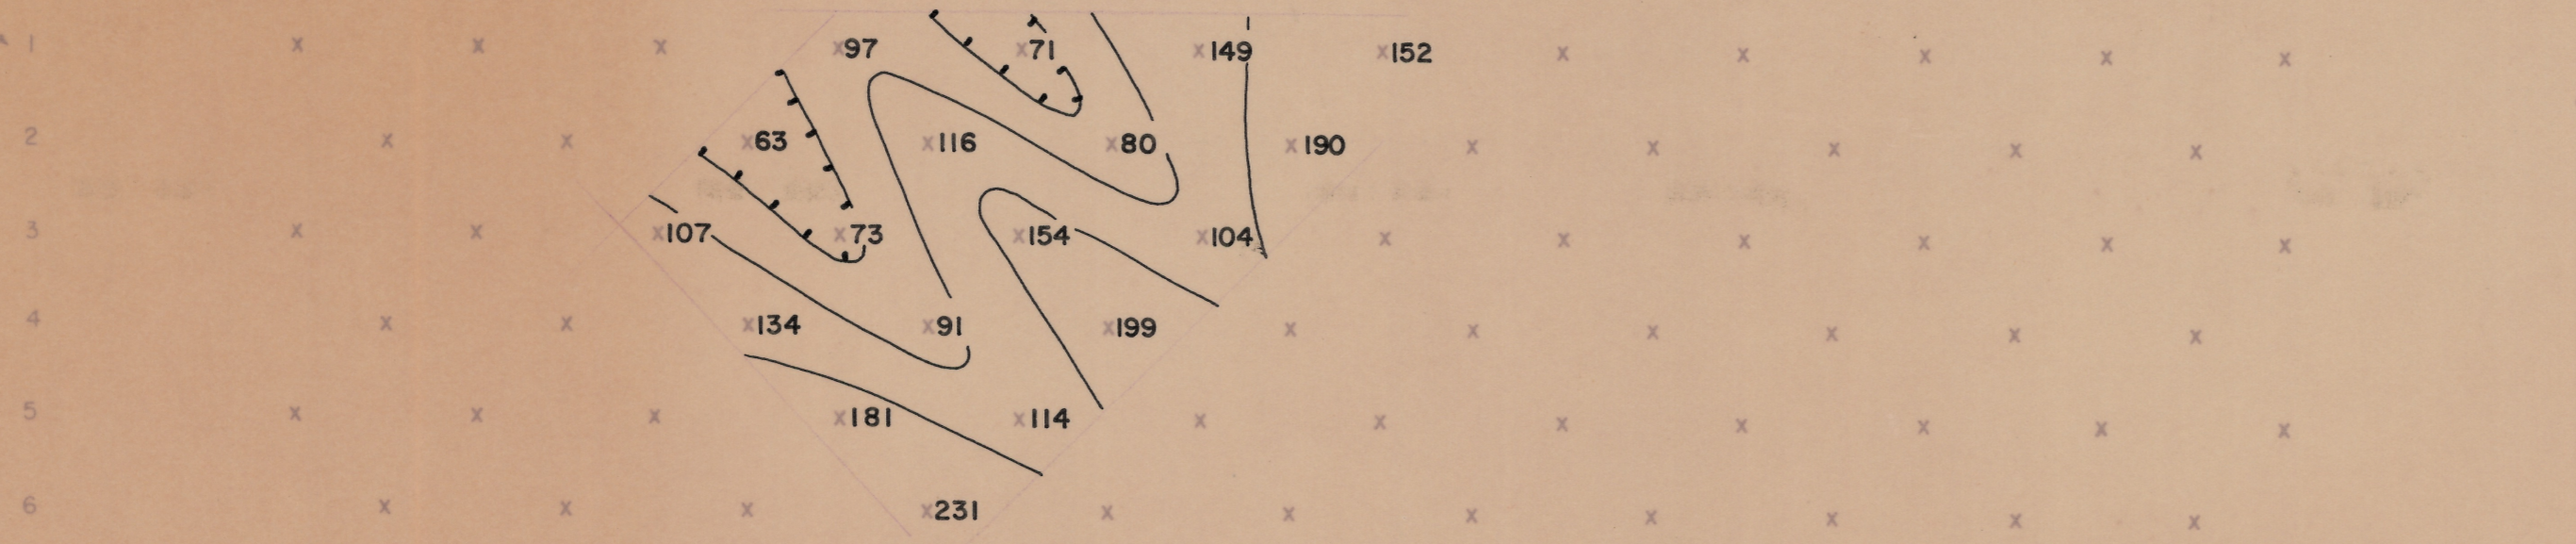


APPARENT RESISTIVITY (ρ_a)
IN UNITS OF OHM FEET FT
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

EXPLANATION

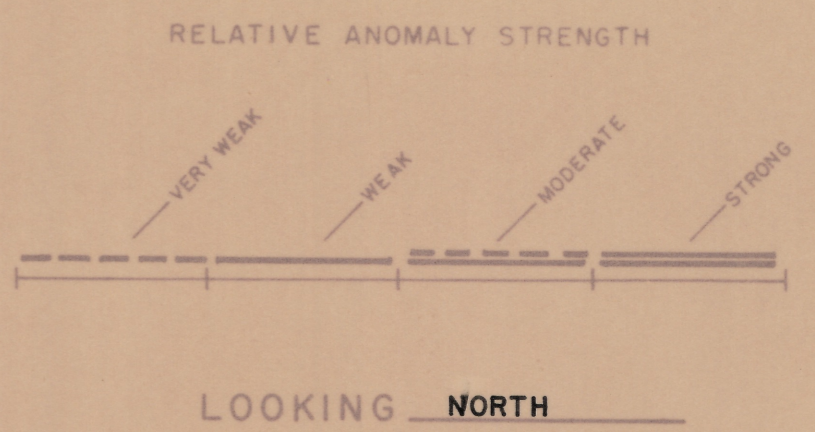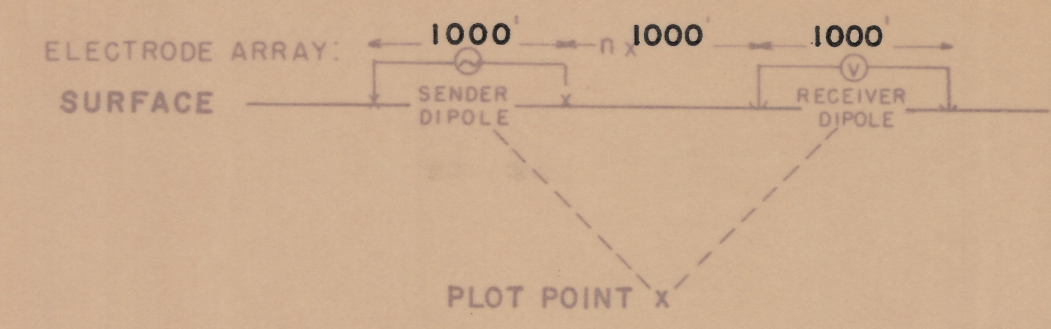

SURFACE SURFACE

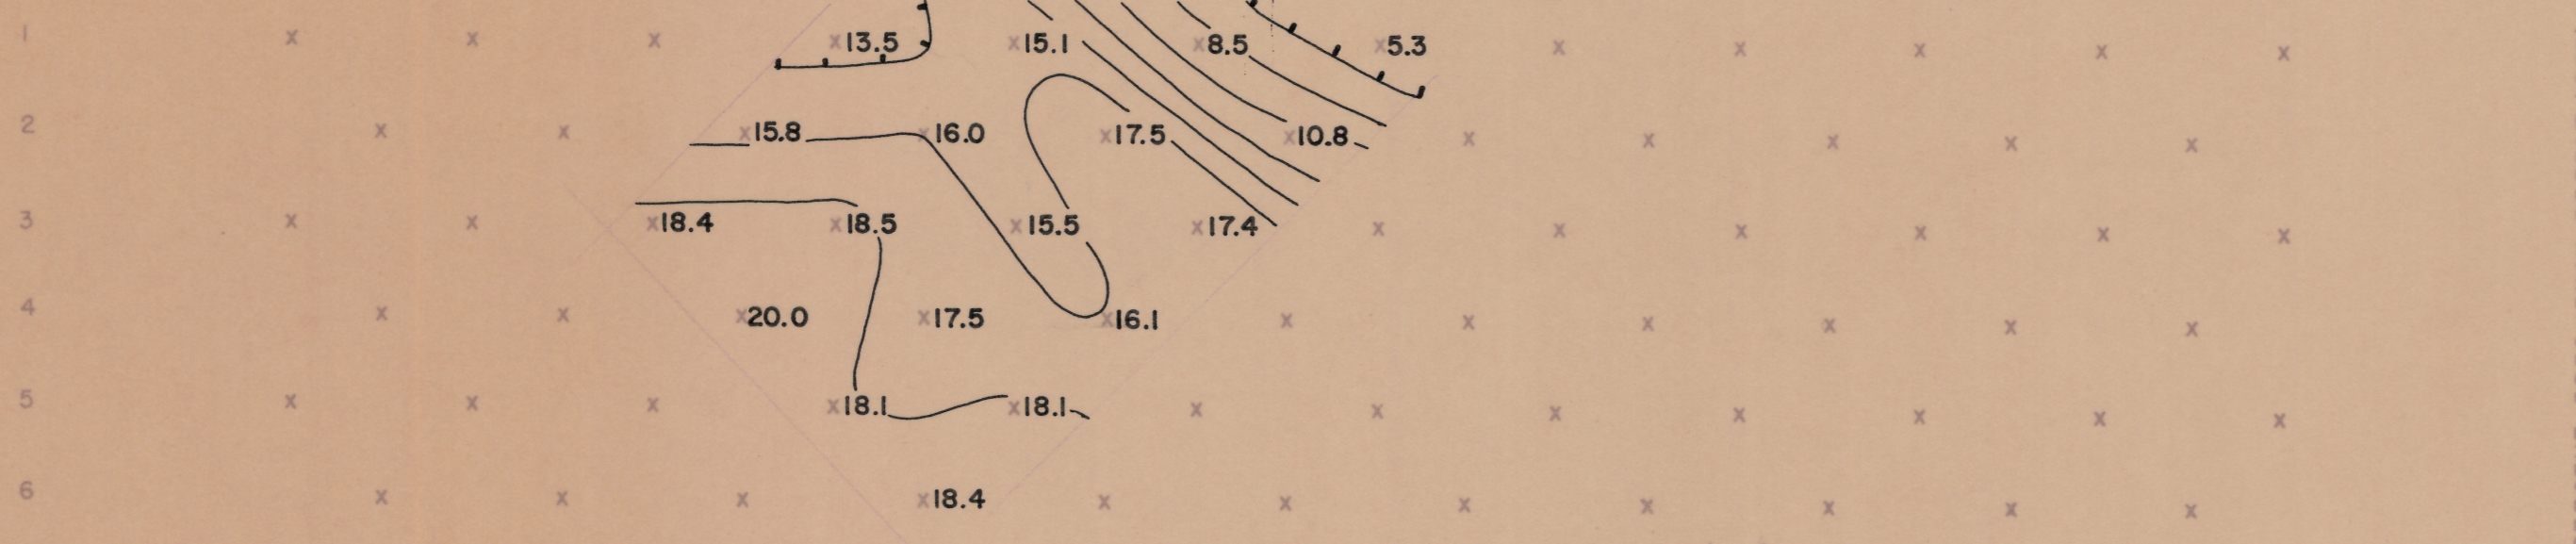

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 1.0 c.p.s.

SURFACE SURFACE



APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
($MCF = \frac{PFE \times 1000}{\rho_a}$)
CONTOUR INTERVAL LOGARITHMIC

SALOME AREA
SECTIONAL DATA SHEET
LINE NO. 6
INDUCED POLARIZATION TRAVERSE
HEINRICH'S GEOEXPLORATION COMPANY
SCALE: 1" = 1000' DATE: MAR. 1968

FOR
MR. OLIVER KILROY



SELF POTENTIAL