


ELECTRODES
STATIONS SURFACE


1 2 3 4 5 60NW SURFACE

Π INTERVAL BETWEEN
SENDER & RECEIVER DIPOLES

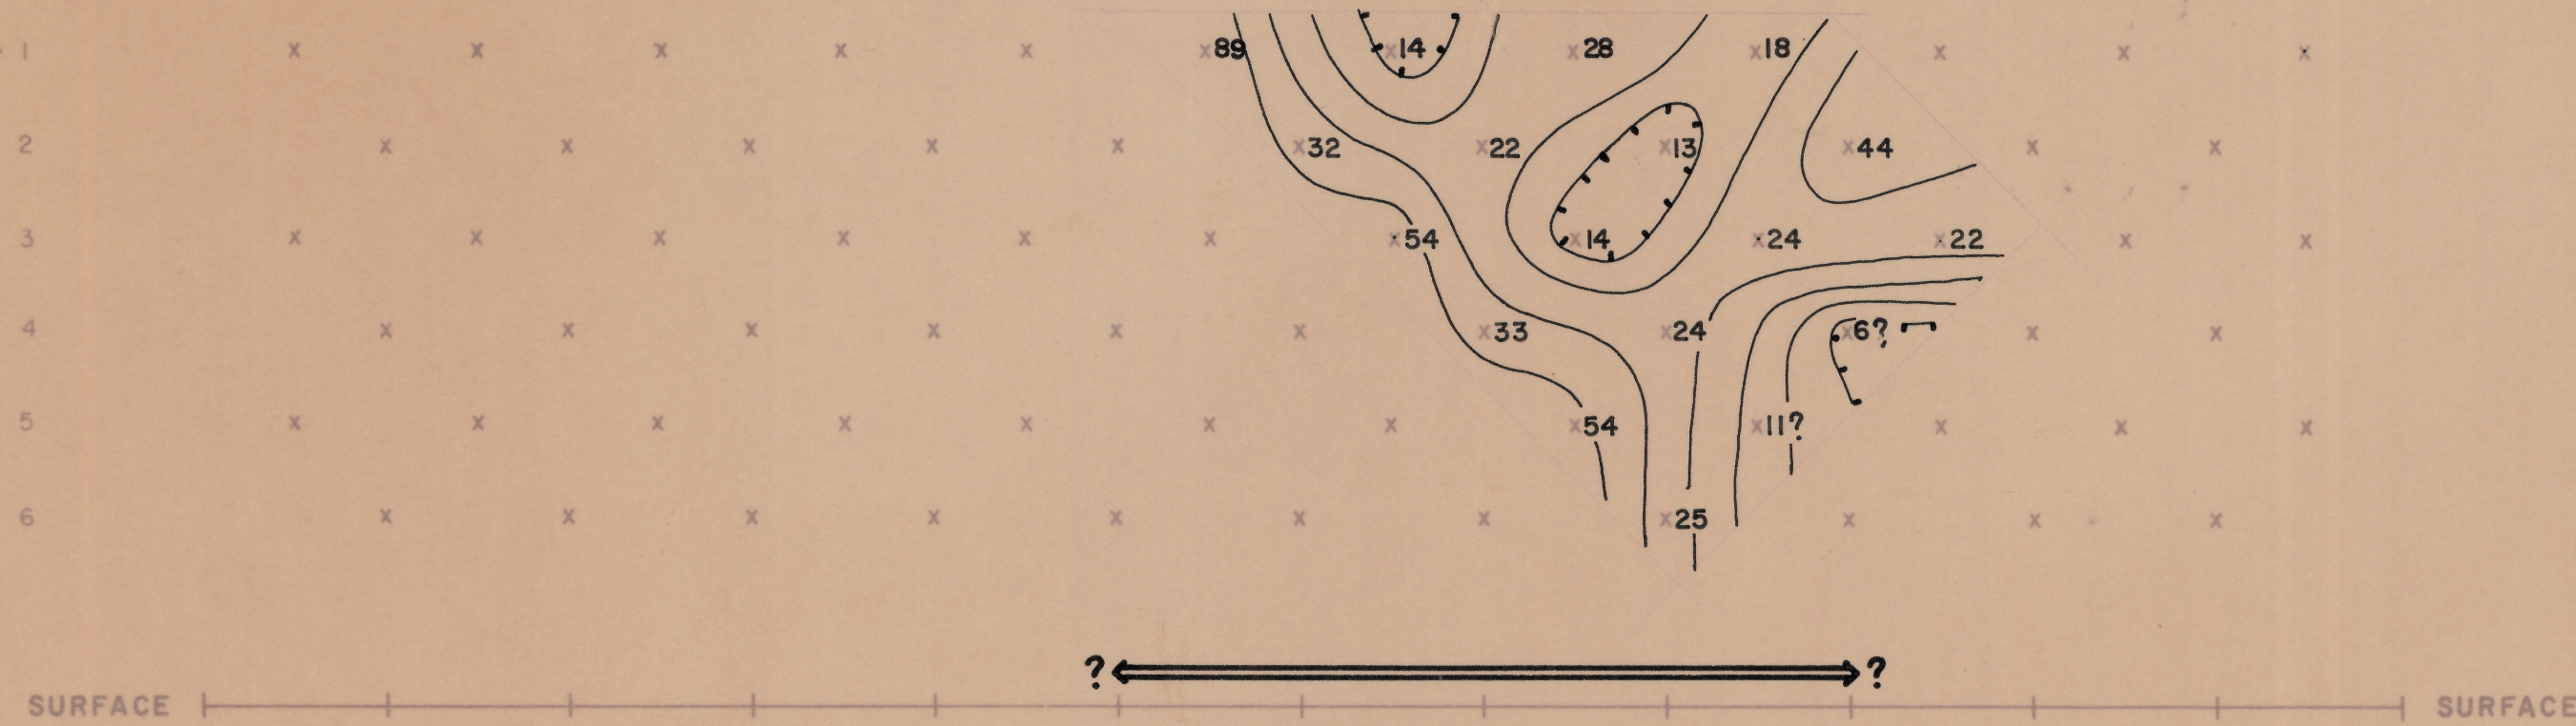


APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET $\frac{10^4}{\Omega}$
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 C.P.S.

EXPLANATION

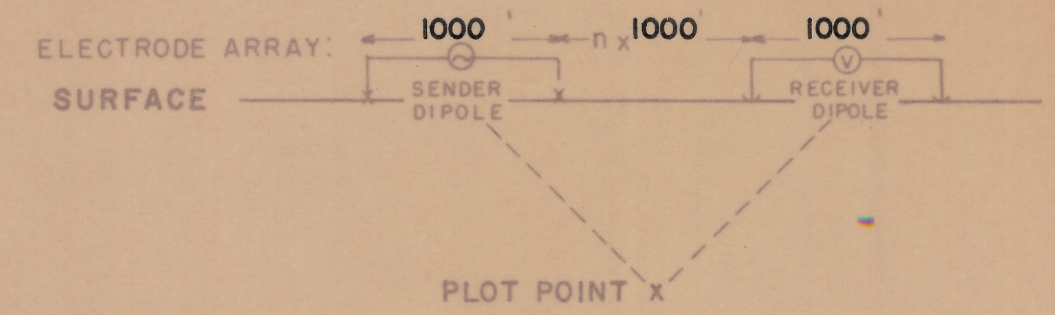


RELATIVE ANOMALY STRENGTH

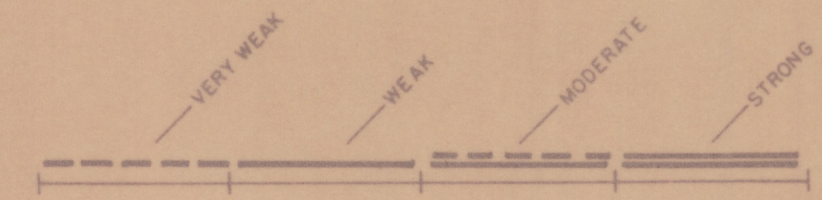


LOOKING S 50° W

SURFACE SURFACE

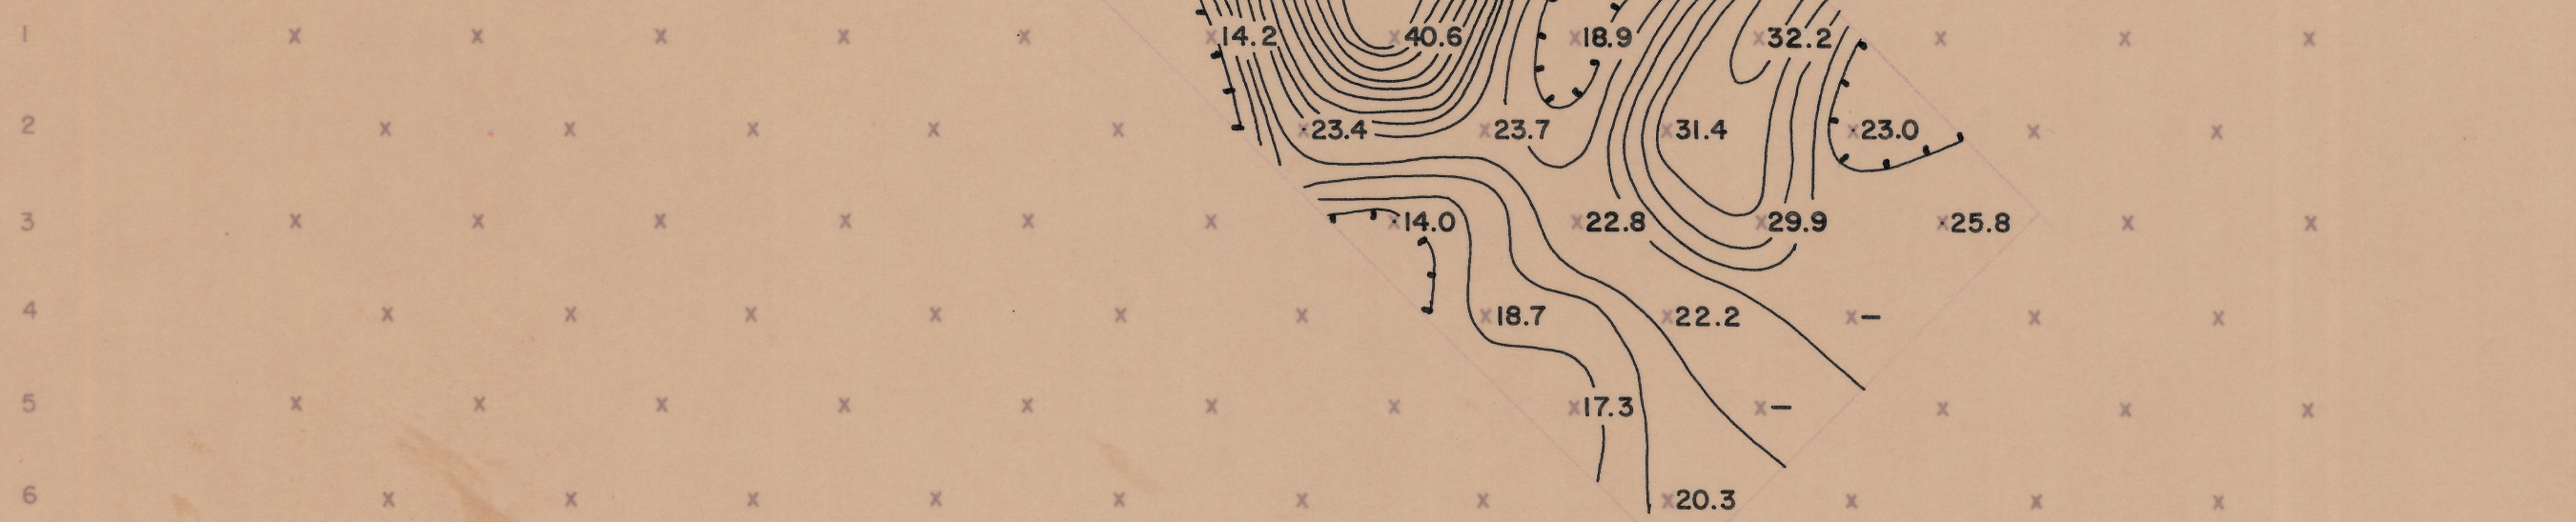

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 1.0 C.P.S.

SURFACE SURFACE

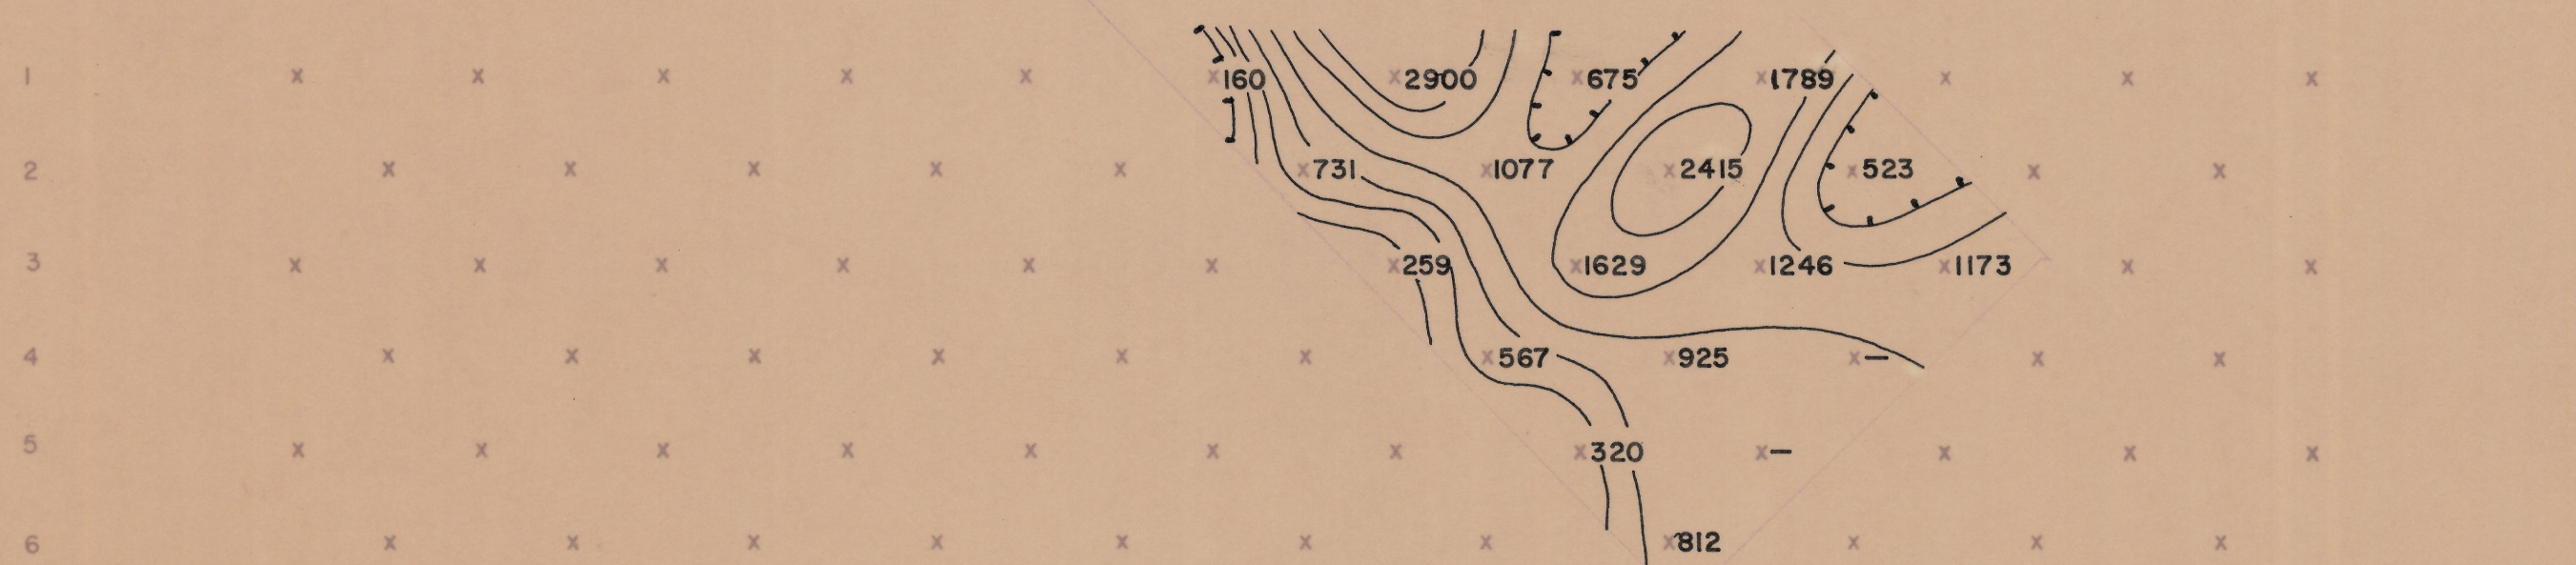

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
($MCF = \frac{PFE \times 1000}{\rho_{DC}}$)
CONTOUR INTERVAL LOGARITHMIC

SALOME AREA

SECTIONAL DATA SHEET

LINE NO. 7


INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000'

DATE: FEB 1968

FOR
MR. OLIVER KILROY

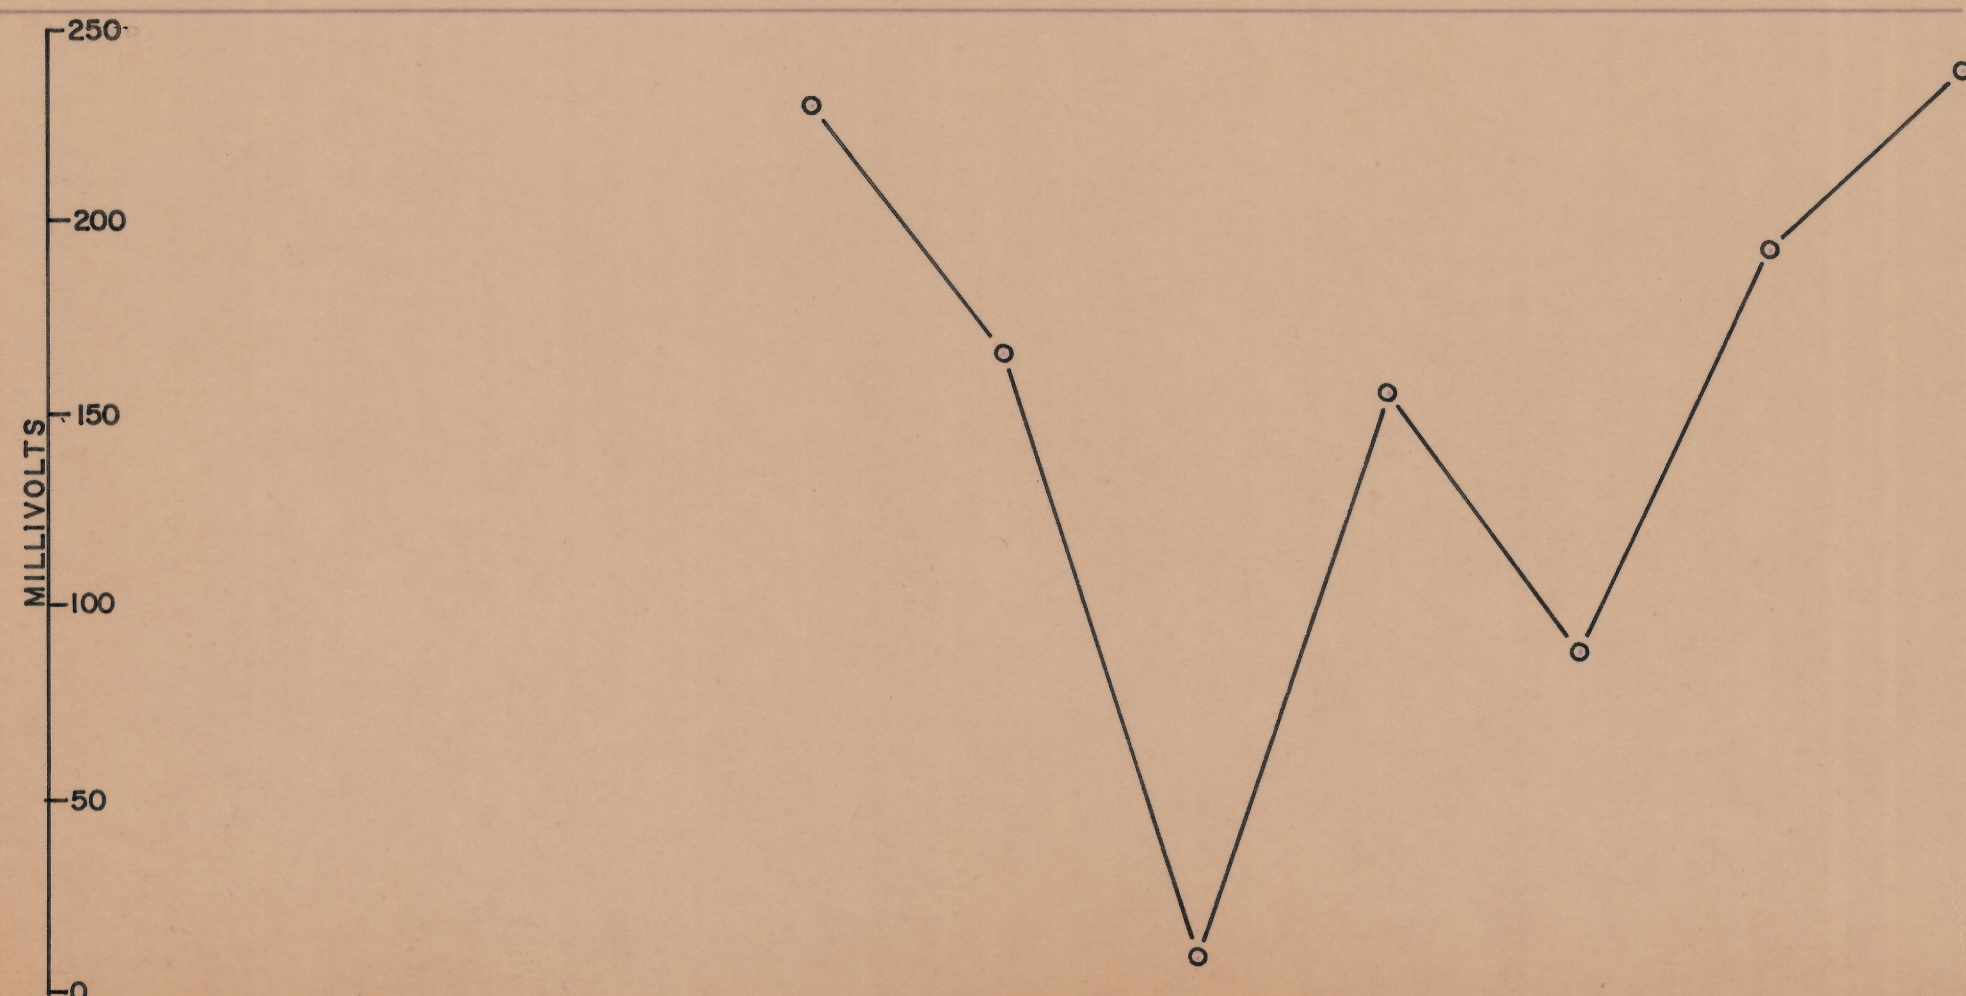

SELF POTENTIAL

0580-510-50-101 1/1/68 hemox