




ELECTRODES SURFACE STATIONS
 40NW 30 20 10 0-NW/SE 10 20 30 40 50 60SE SURFACE

Interval between sender & receiver dipoles

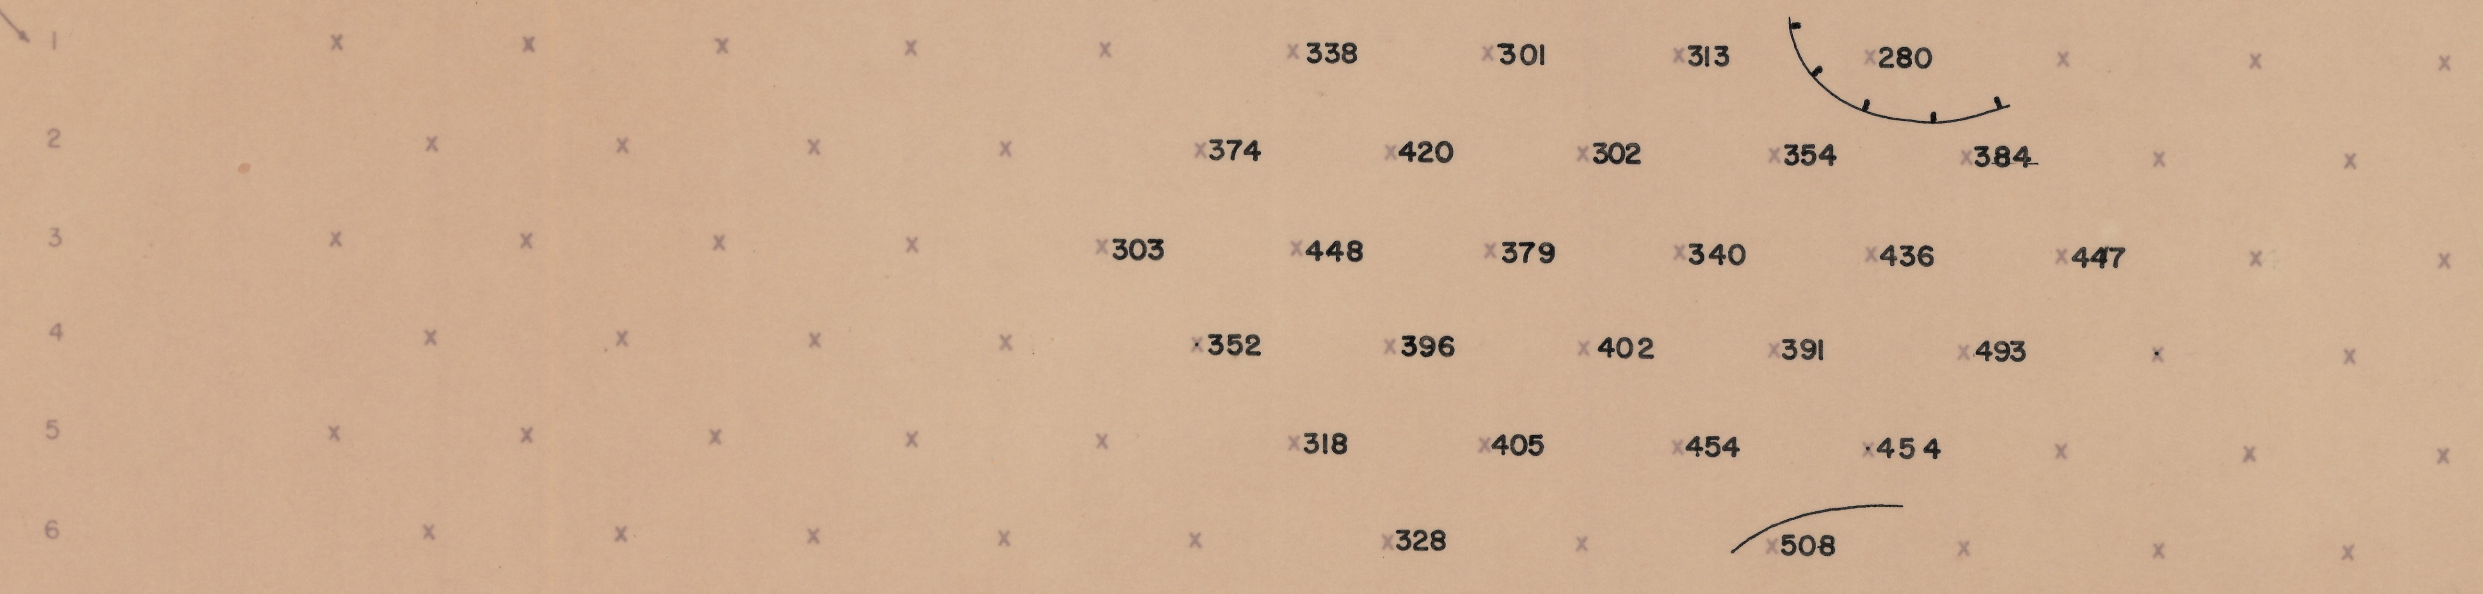


APPARENT RESISTIVITY (ρ_a)
 IN UNITS OF OHM FEET (ΩFT)
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 C.P.S.

EXPLANATION

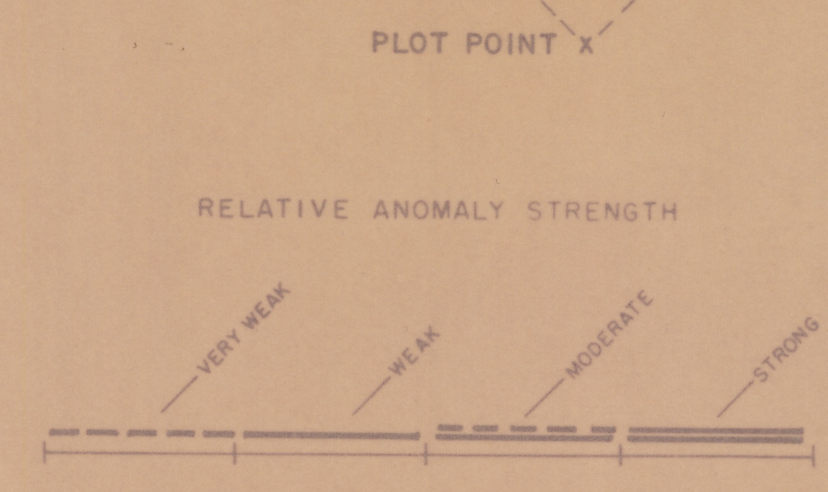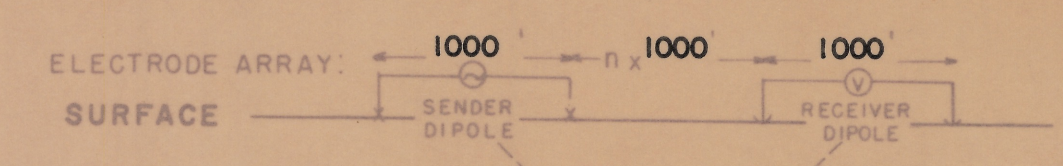


LOOKING N 22° E

SURFACE SURFACE

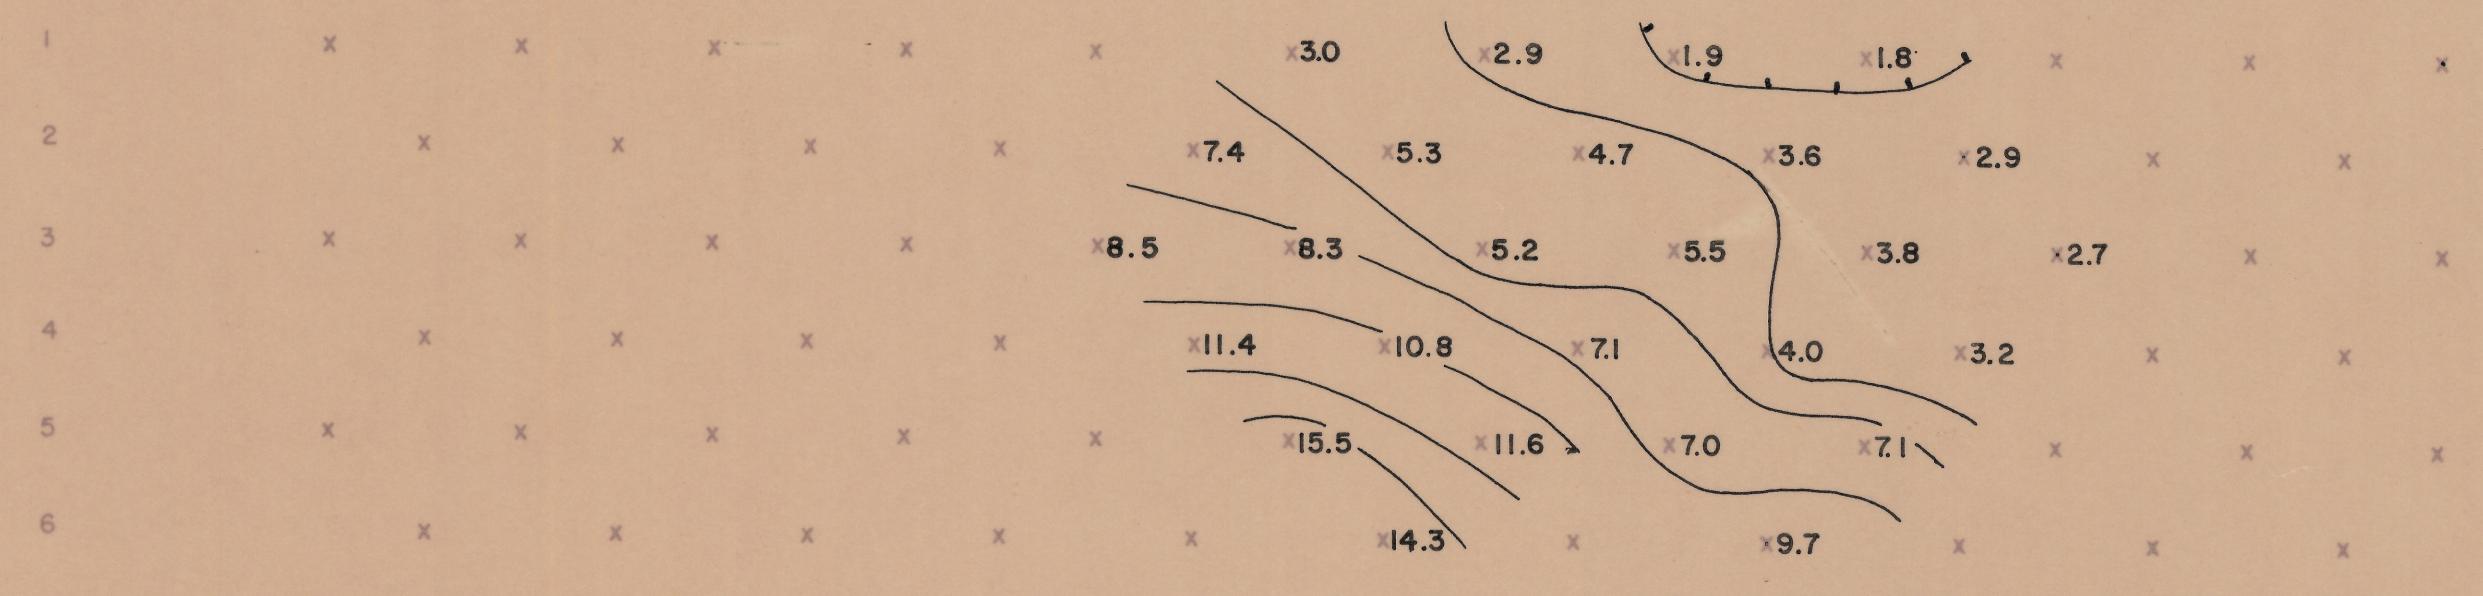


PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 1.0 C.P.S.

SURFACE SURFACE

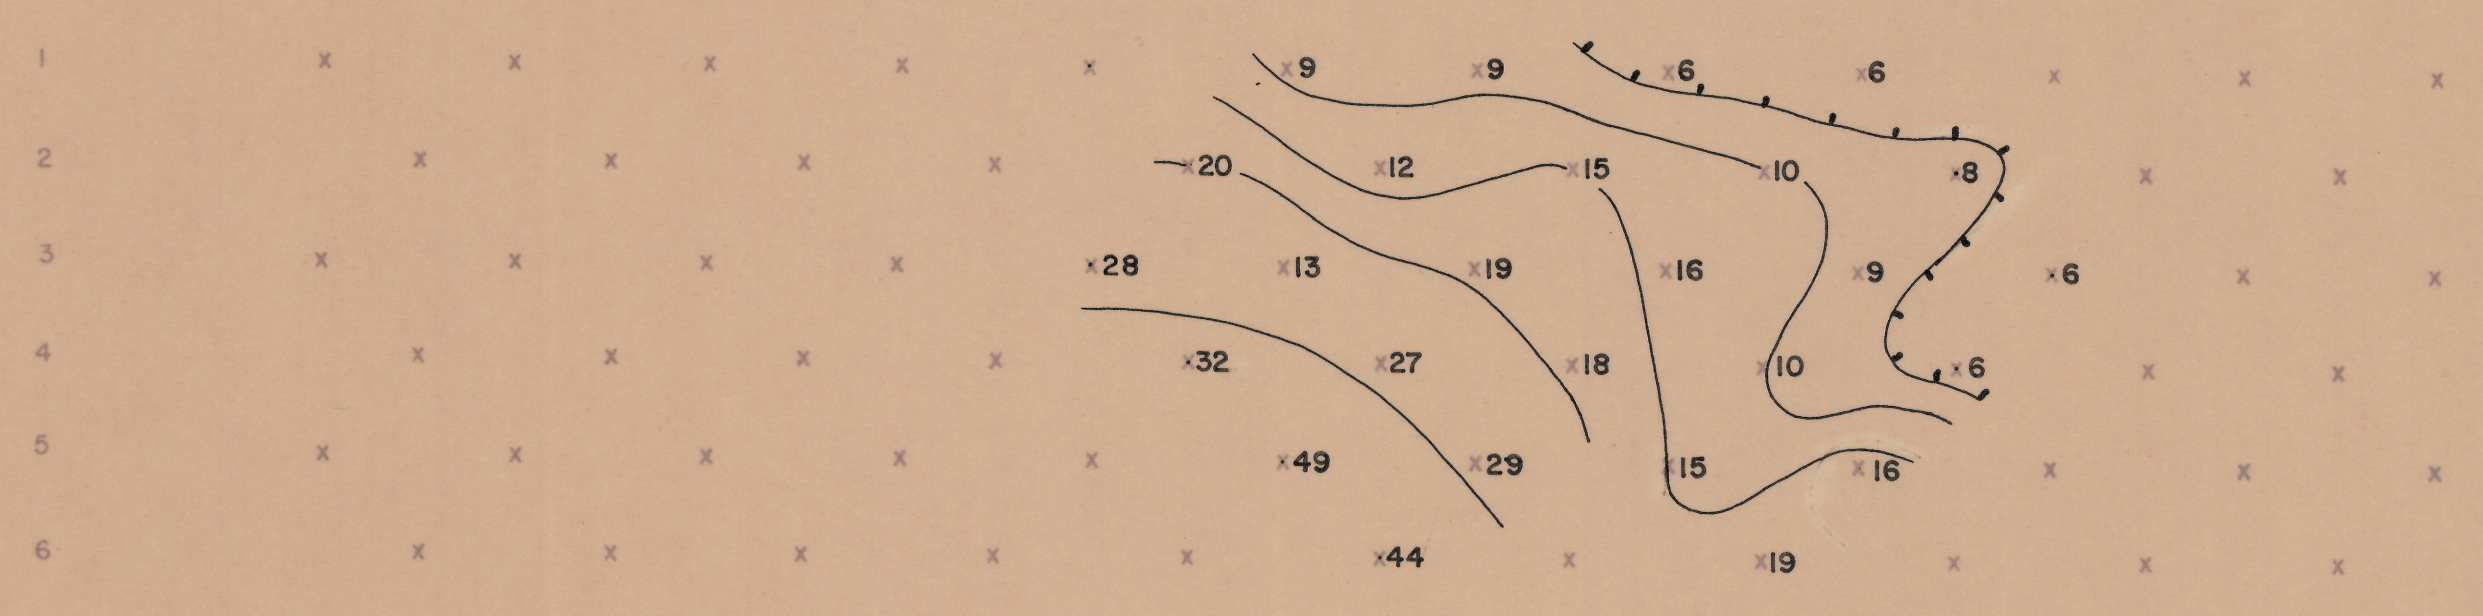

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 (MCF = $\frac{PFE \times 1000}{\rho_a}$)
 CONTOUR INTERVAL LOGARITHMIC

SALOME AREA
 SECTIONAL DATA SHEET
 LINE NO. 8 (SPREADS 1 & 2)
 INDUCED POLARIZATION TRAVERSE
 HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 1000'
 DATE: FEB. 1968
 FOR
 MR. OLIVER KILROY

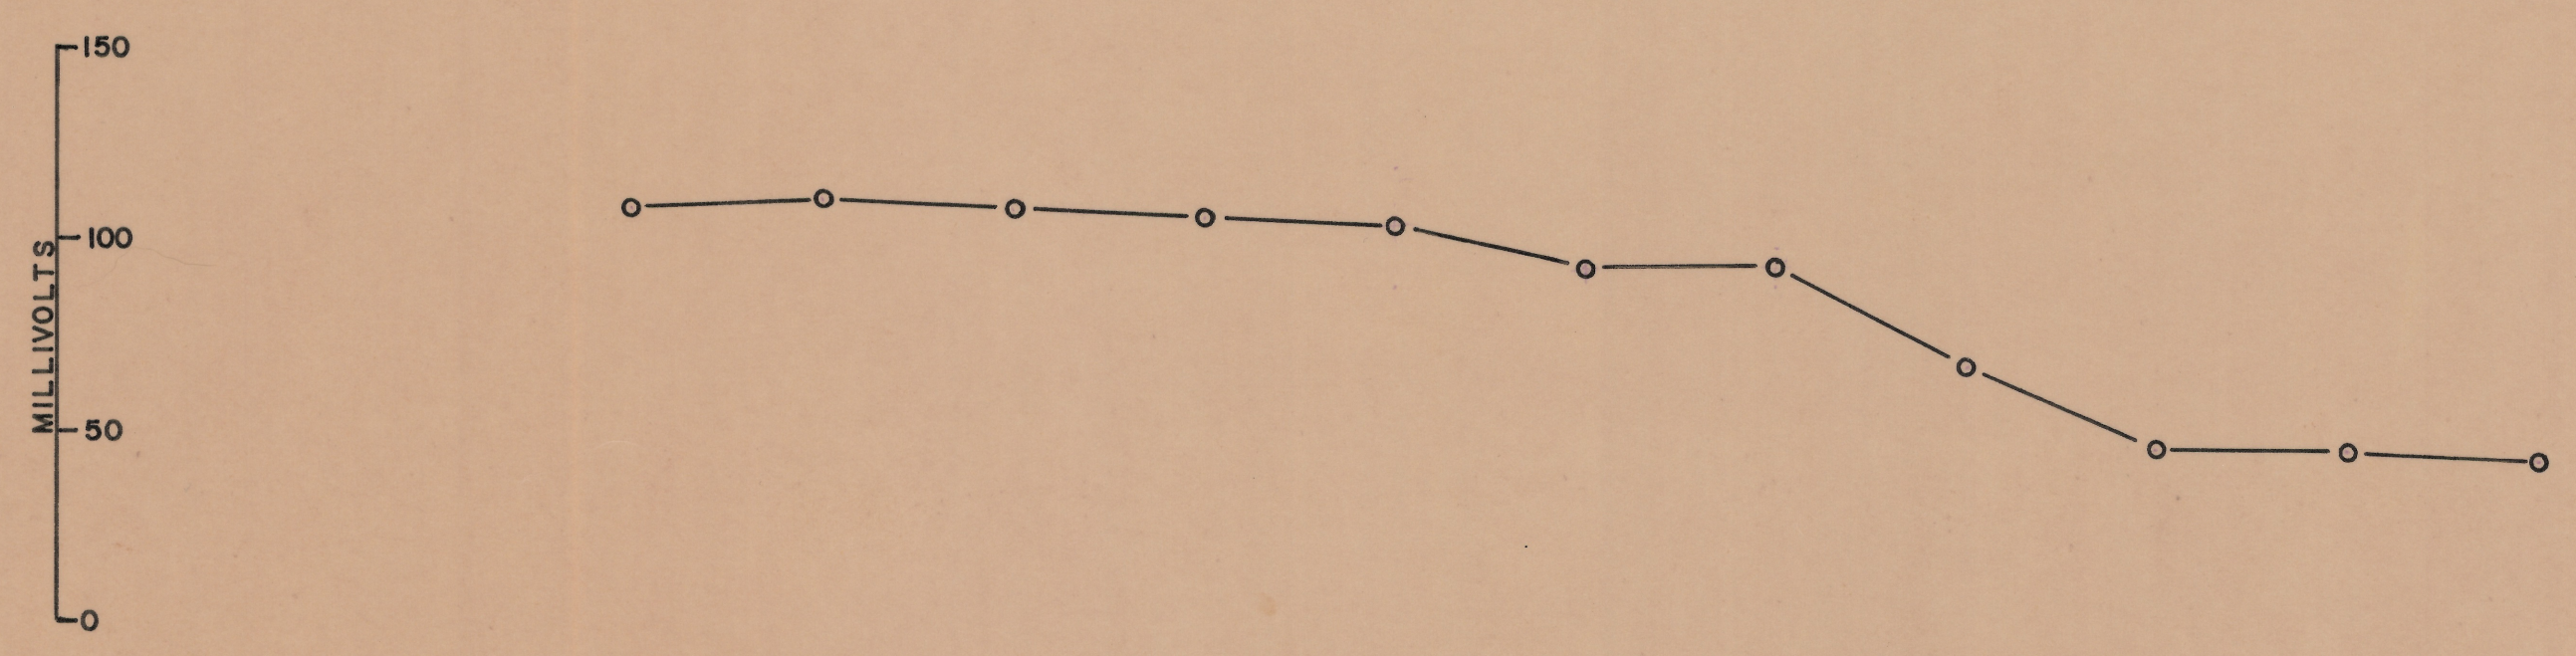

SELF POTENTIAL

1280-510-20-105 H/C 30 January 1968