



APPARENT RESISTIVITY (ρ_a) IN UNITS OF OHM FEET (FT)
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 C.P.S.


EXPLANATION

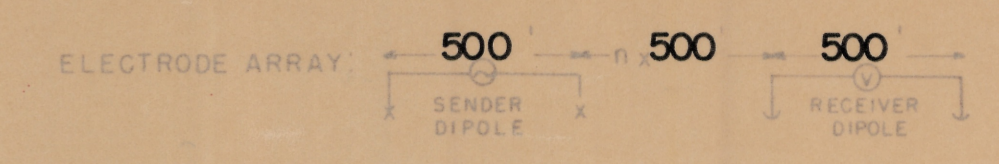

RELATIVE ANOMALY STRENGTH

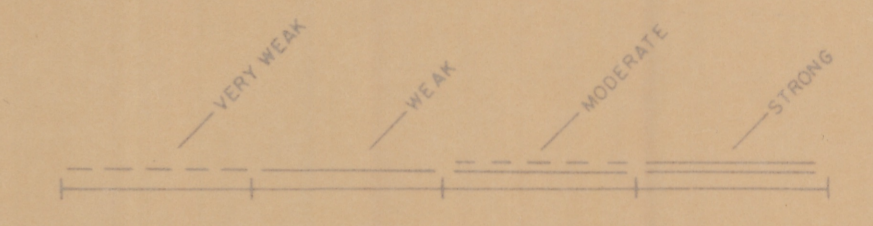

LOOKING NORTH

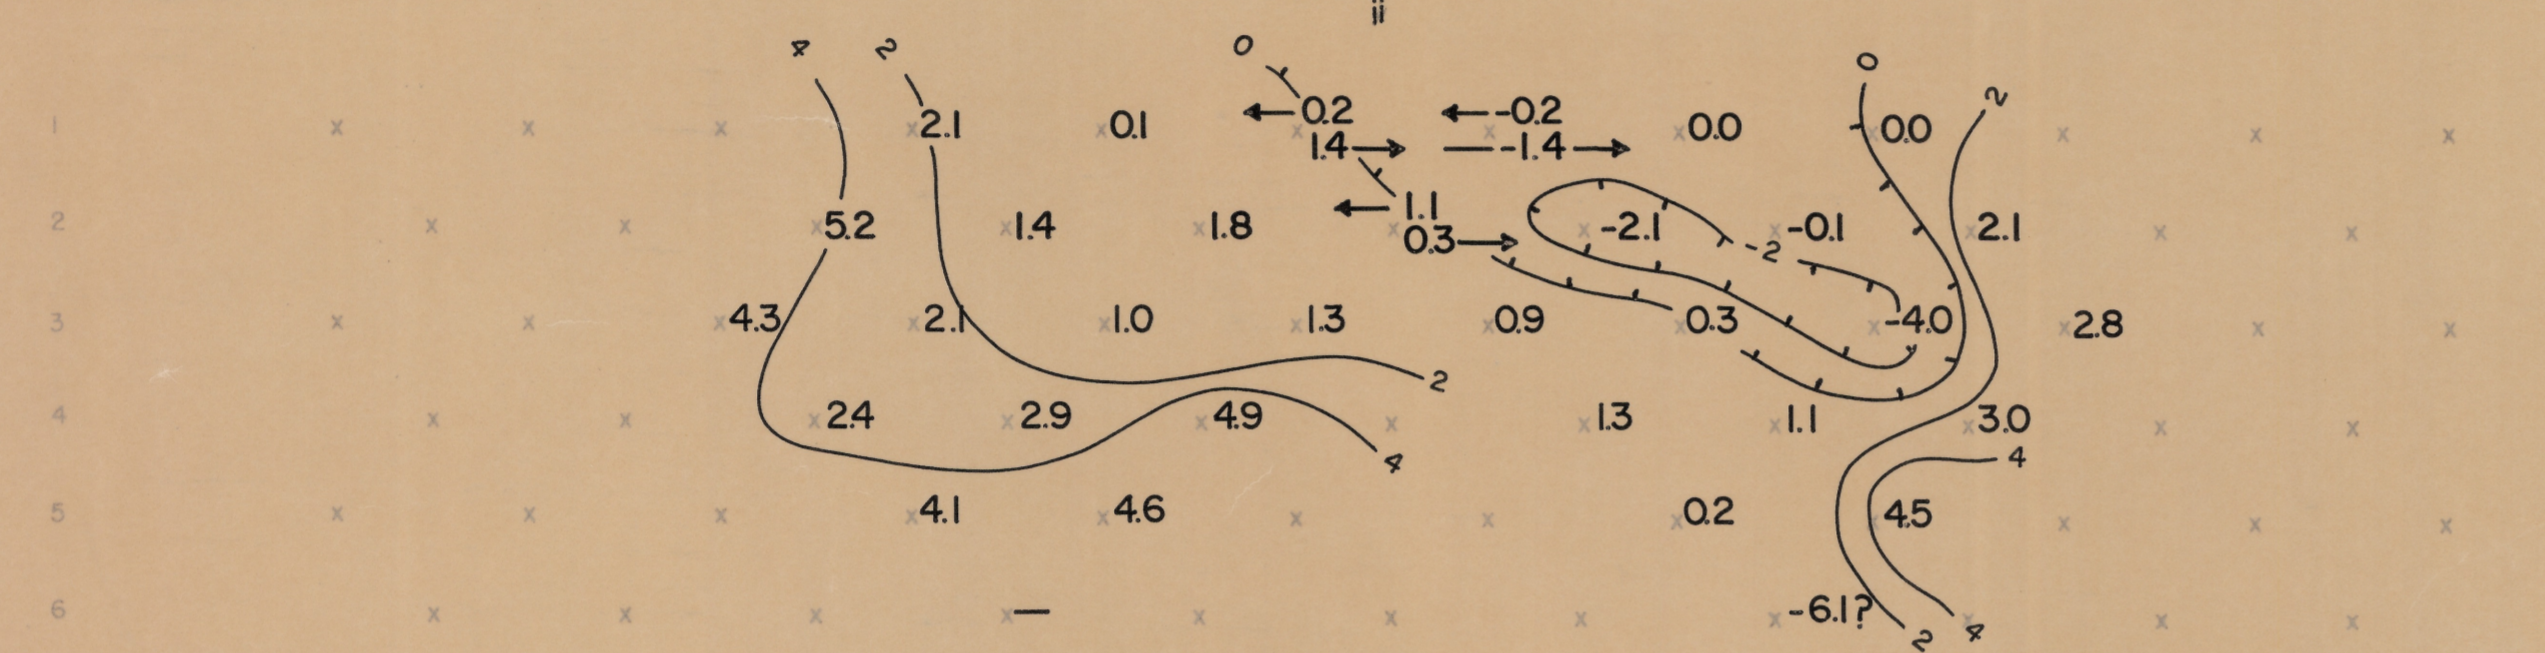

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 1.0 C.P.S.

SOUTH HOTTENTOT

SECTIONAL DATA SHEET


LINE NO. 2 (400S)

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 500' DATE: AUG. 19, 1965

FOR

ROBERT L. REDMOND

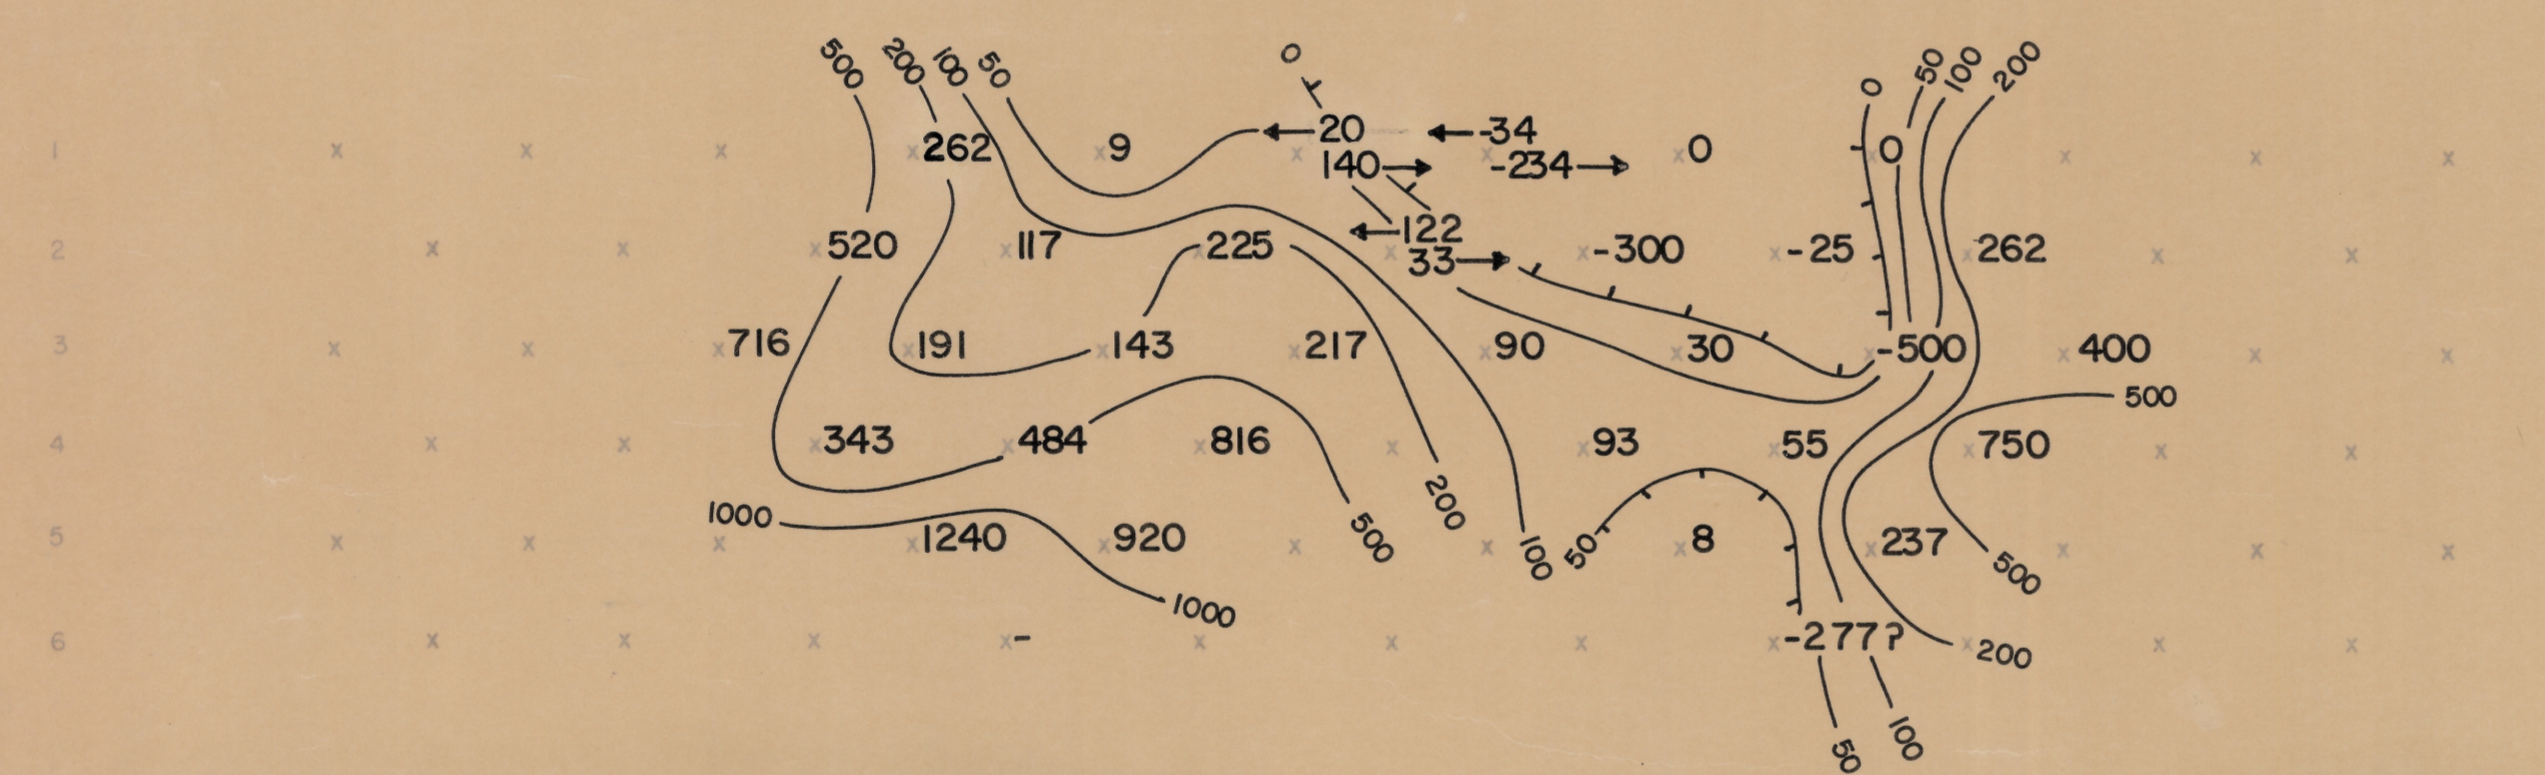

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 (MCF = $\frac{\rho_a}{\rho_{EE} \times 1000}$)
 CONTOUR INTERVAL LOGARITHMIC

