


APPARENT RESISTIVITY (PPE) IN UNITS OF OHM FEET (1 OHM FOOT = 0.0254 OHM METERS)


CONTOUR INTERVAL LOGARITHMIC

SENDER FREQUENCY: 0.05 CPS

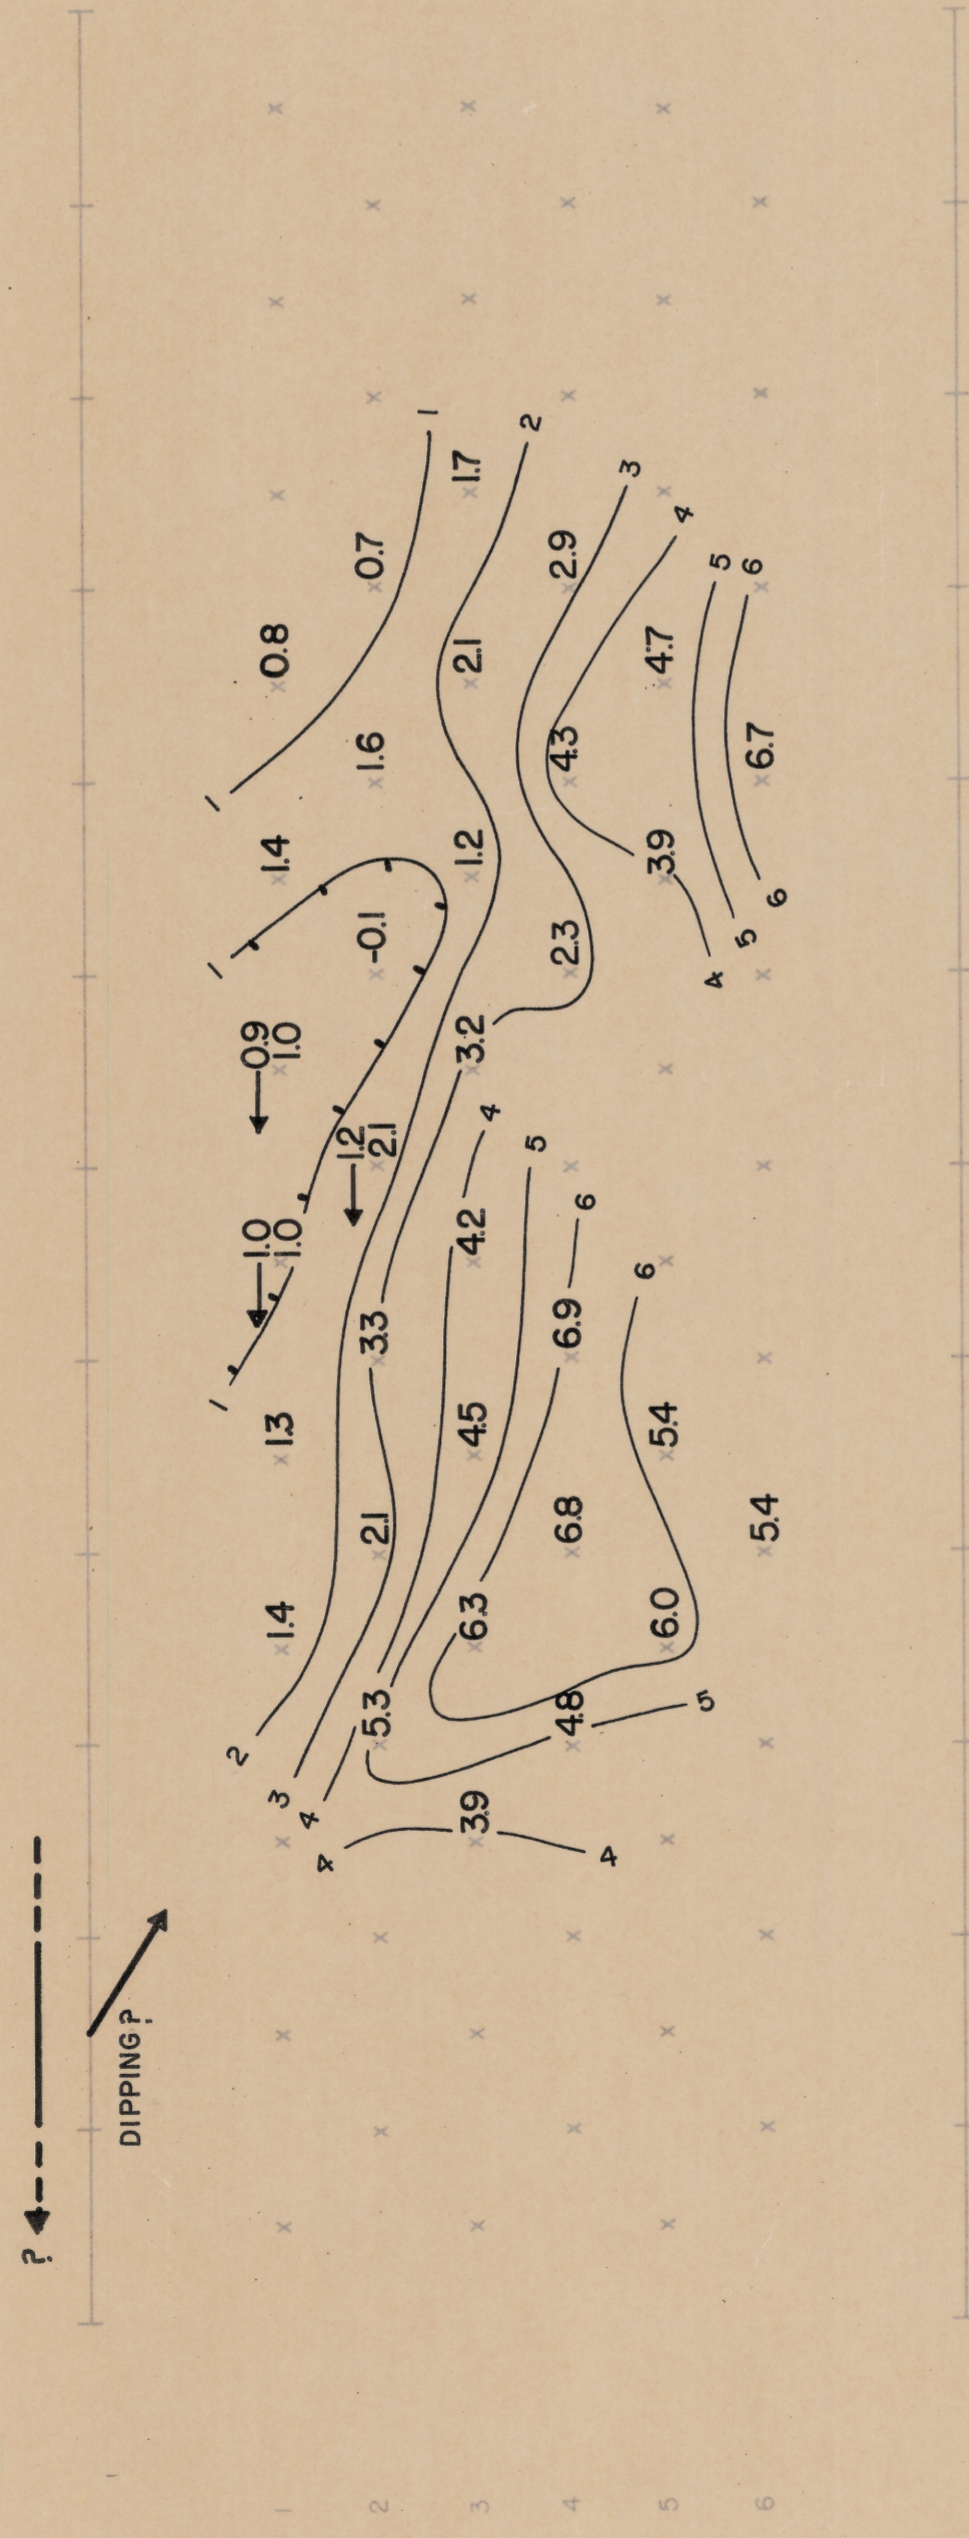


PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT

SENDER FREQUENCIES: 0.05 & 1.0 CPS

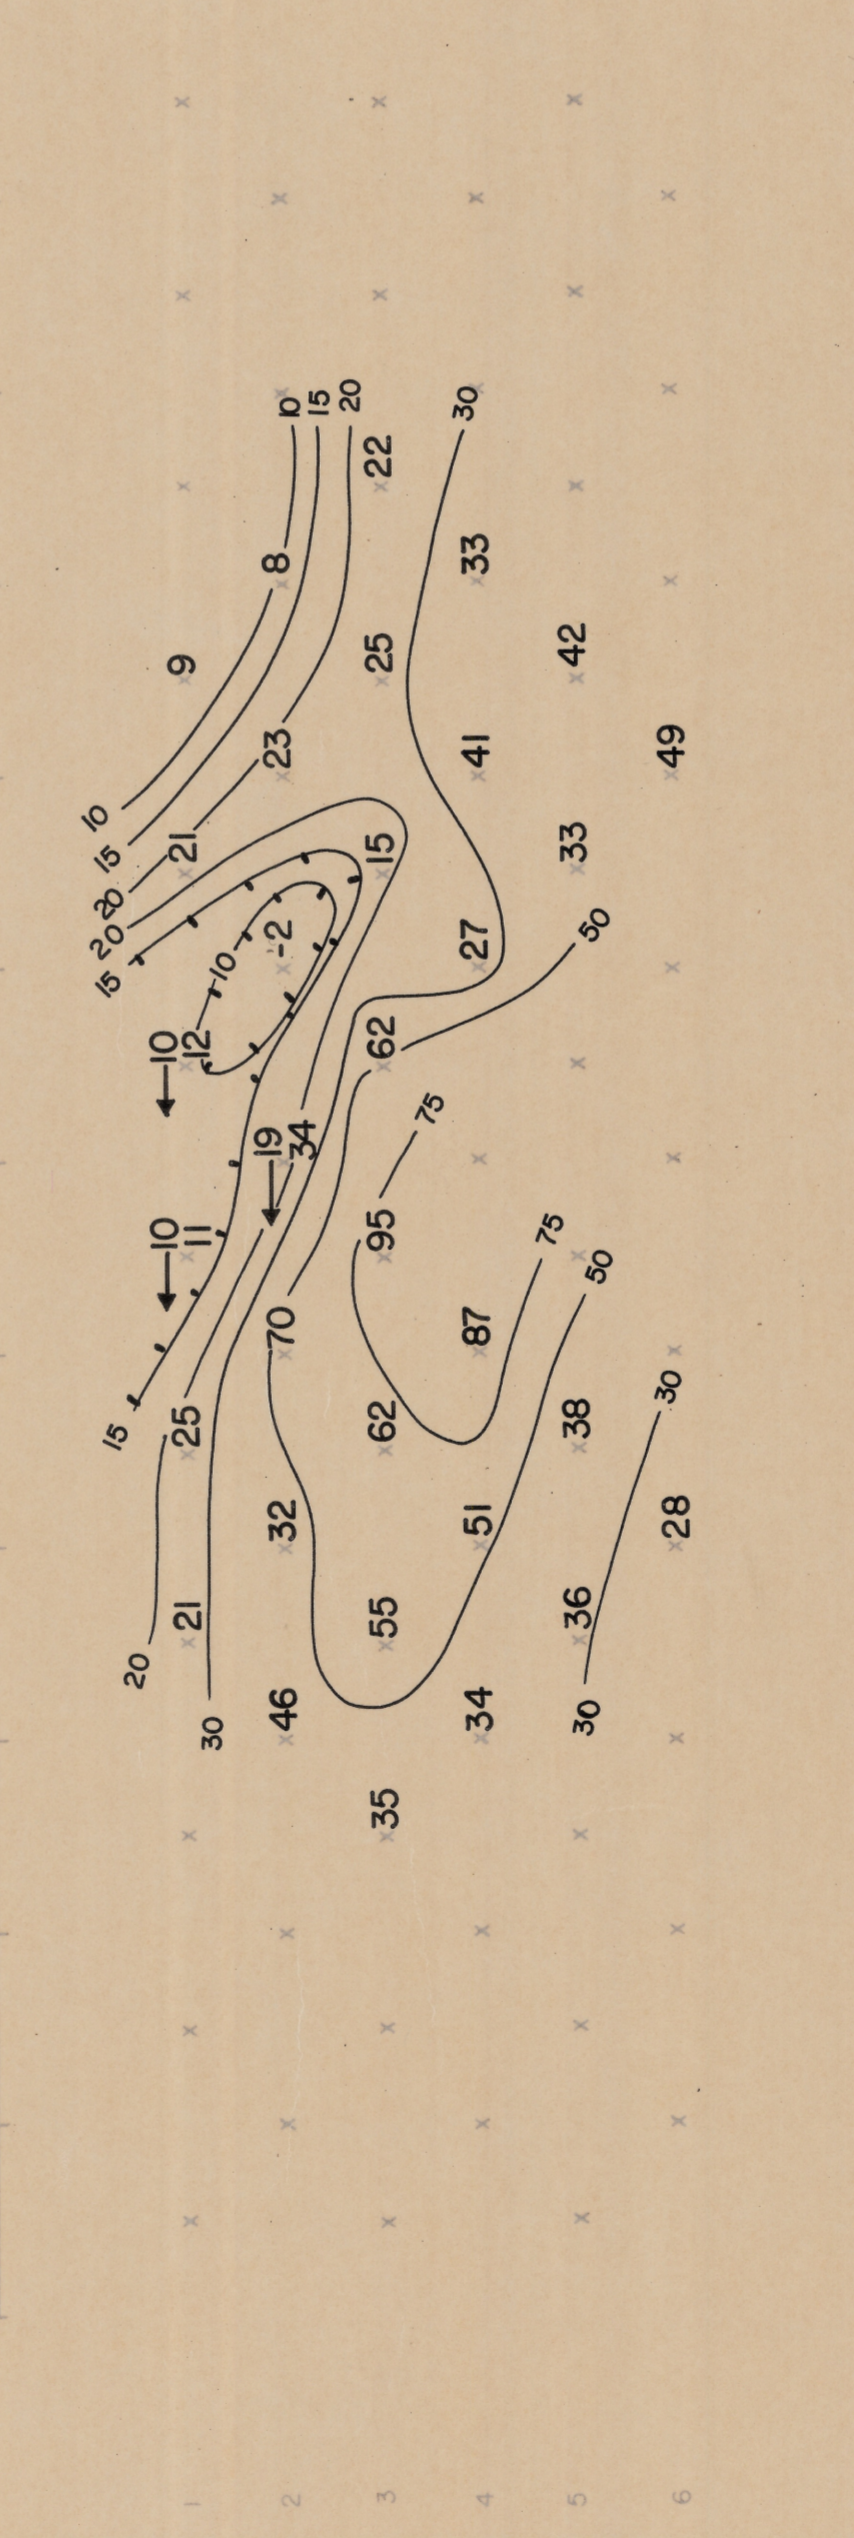


APPARENT METALLIC CONDUCTION FACTOR (MCF) CONTOUR INTERVAL LOGARITHMIC


(MCF = $\frac{PPE \times 1000}{\pi^2}$)

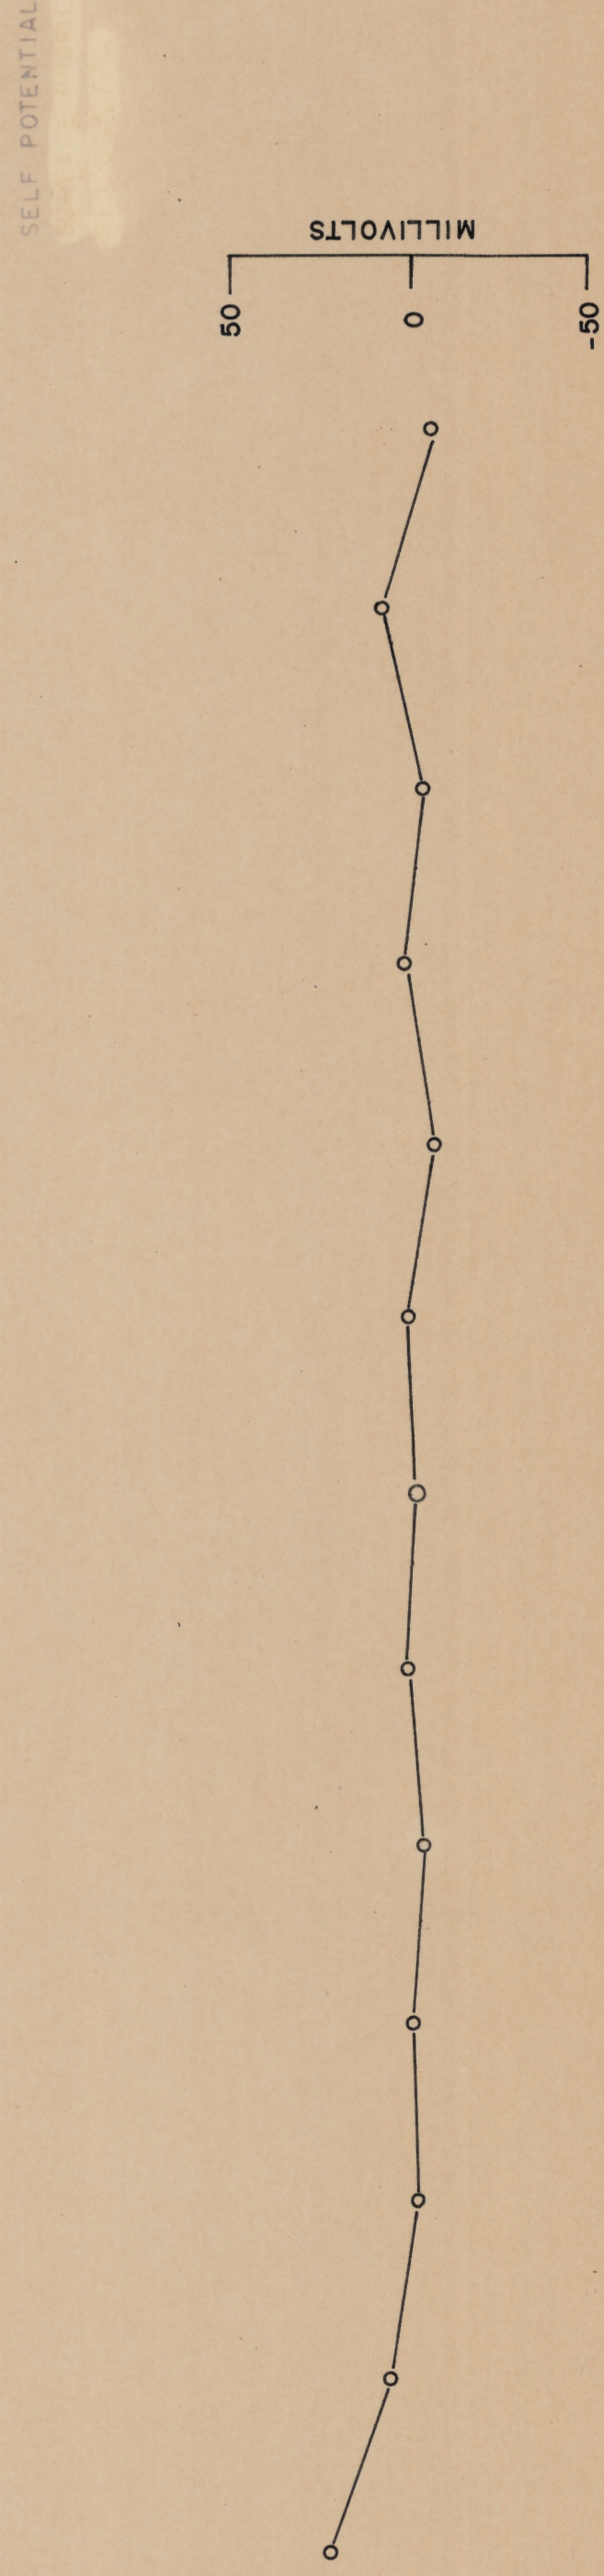

EXPLANATION



RELATIVE ANOMALY STRENGTH

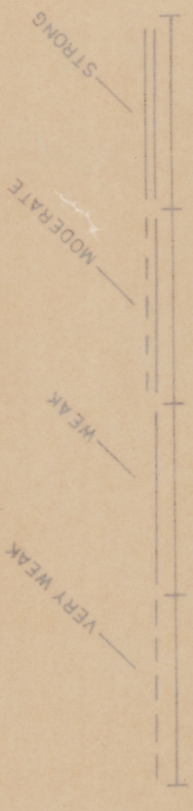

LOOKING N 35° E

LOVEALL AREA

SECTIONAL DATA SHEET
LINE NO. 2

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 1500' DATE: DEC. 1965

FOR

HECLA MINING COMPANY