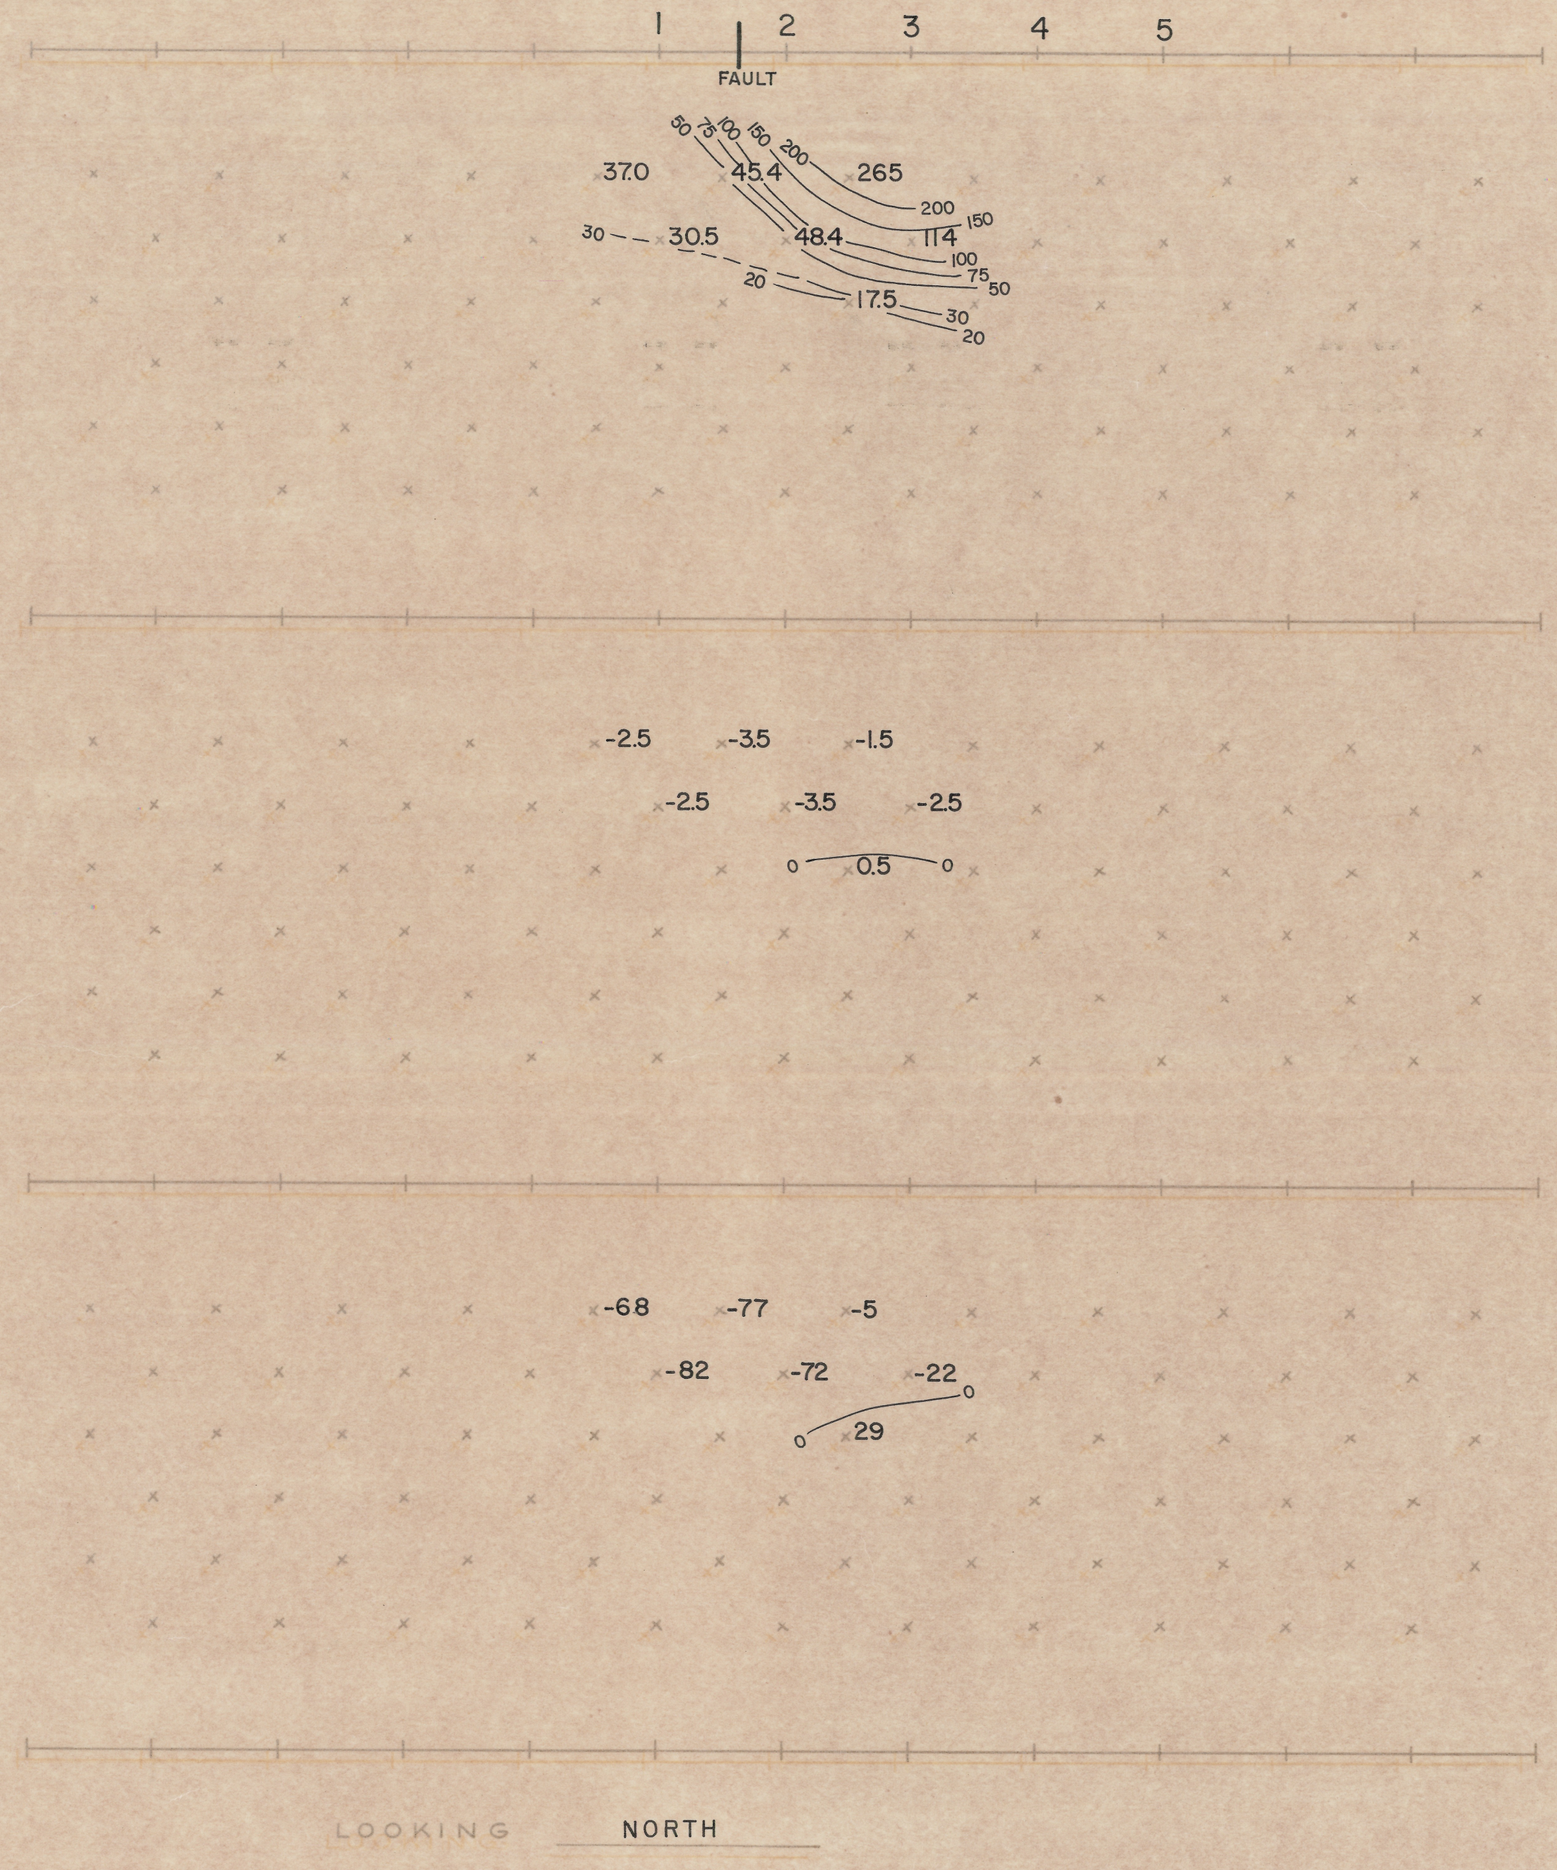

APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET

CONTOUR INTERVAL, LOGARITHMIC

SENDER FREQUENCY: 0.05 c.p.s.

PERCENT FREQUENCY EFFECT (PFE)

CONTOUR INTERVAL CONSTANT

SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.

APPARENT "METALLIC CONDUCTION" FACTOR $\left(\text{MCF} = \frac{\text{PFE} \times 1000}{\rho_{DC}}\right)$

CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL
SURFACE PROFILE
GEOLOGY, ETC.

RELATIVE ANOMALY STRENGTH

VERY WEAK — WEAK — MODERATE — STRONG

ELECTRODE ARRAY



BEE CLAIMS

SECTIONAL DATA SHEET

LINE No. 1

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE 1" = 250' DATE OCT. 1964

FOR

HECLA MINING CO.