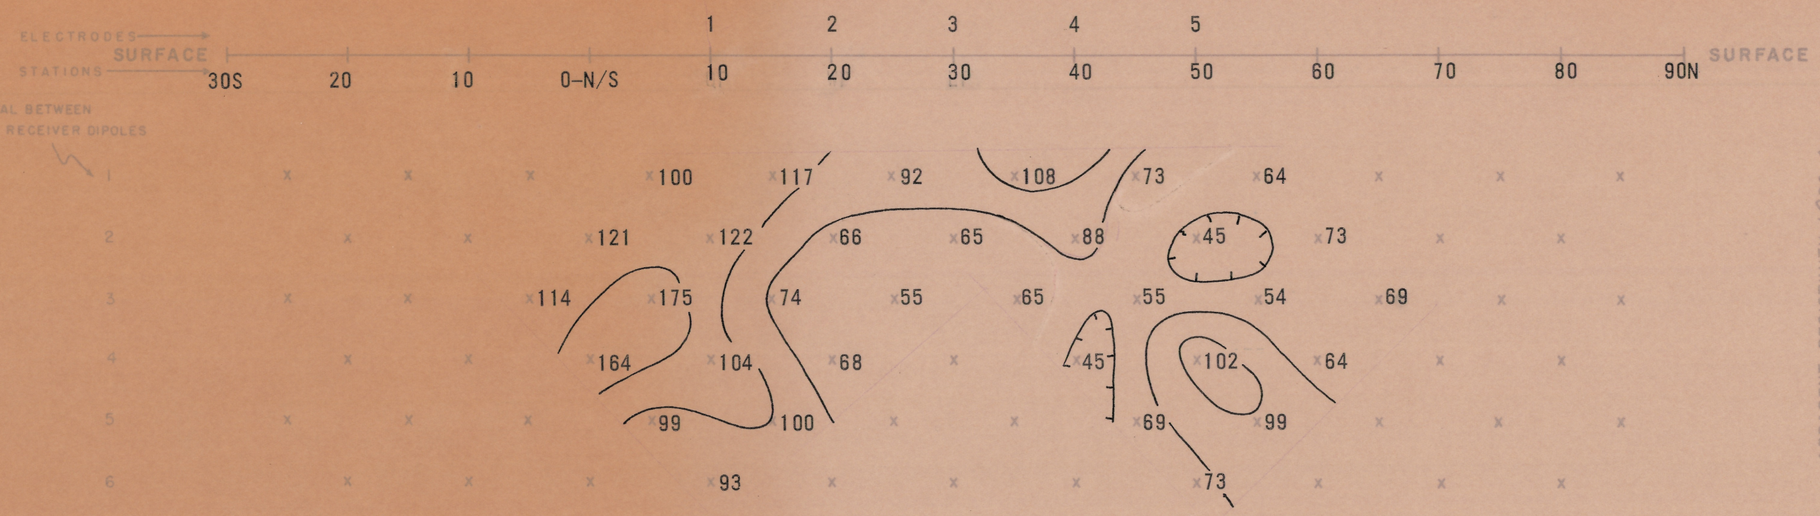

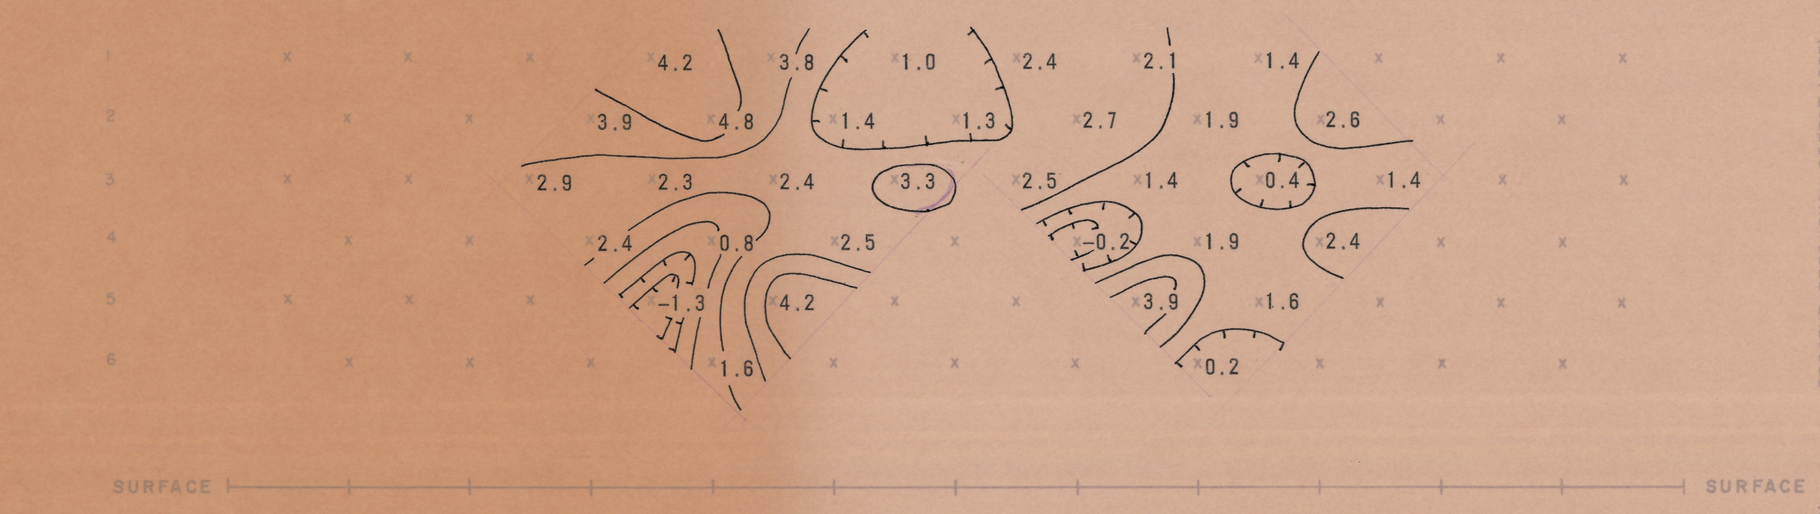

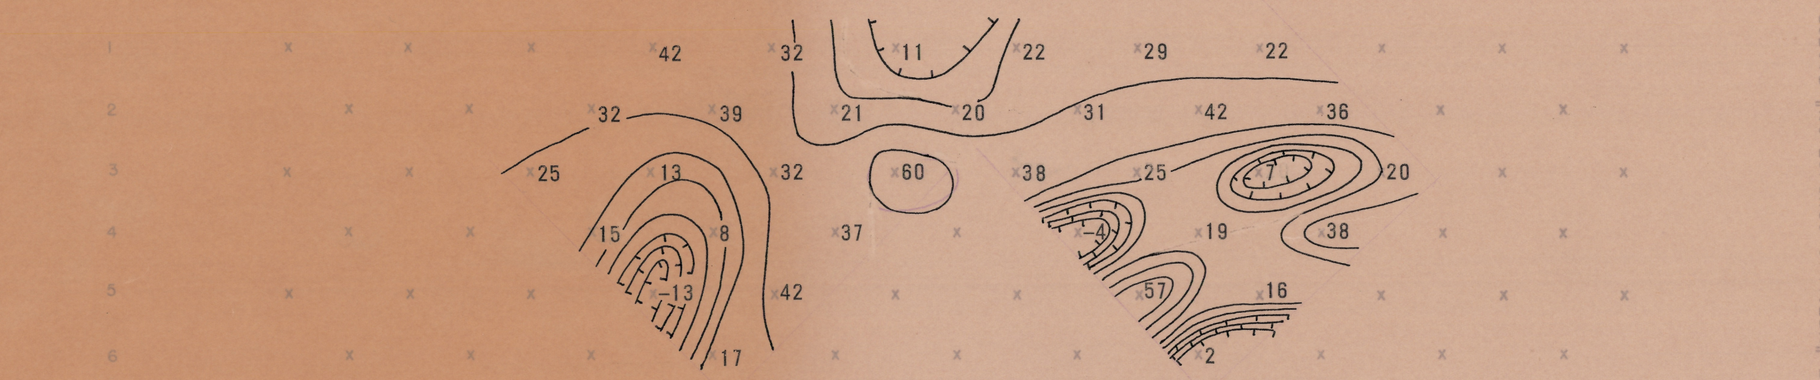

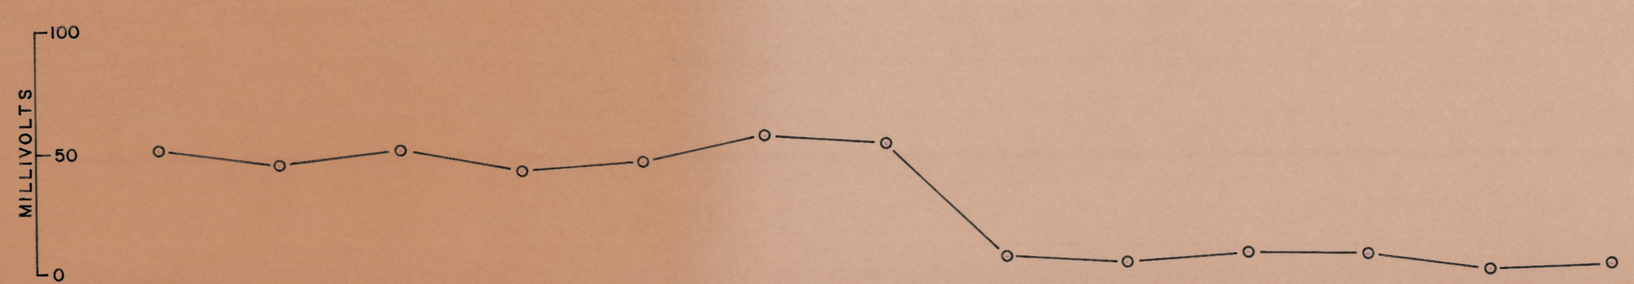

APPARENT RESISTIVITY (ρ_a) IN UNITS OF OHM FEET

CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 1.0 c.p.s.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
$\left(MCF = \frac{PFE \times 1000}{\rho_{DC}}\right)$
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

EXPLANATION

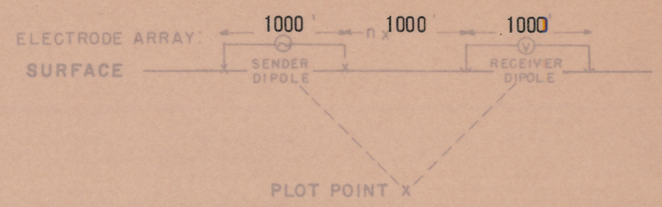

RELATIVE ANOMALY STRENGTH

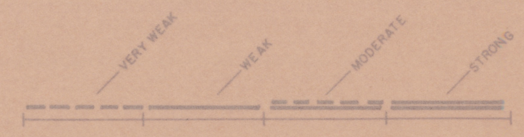

LOOKING WEST

VULTURE MINE AREA

SECTIONAL DATA SHEET

LINE NO. 9 (1000')

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000' DATE: AUG 1967

FOR

GUNNEX LIMITED

HEINRICHS GEOEXPLORATION COMPANY
POST OFFICE BOX 8671, TUCSON, ARIZONA, 85708
Phone: 602/623-0578 Cable: GEOEX, Tucson
vancouver sydney
geophysical engineers